

***Intra-ACP Climate Service and related applications
(ClimSA)***

Climate Station

User Manual

Version 1.1.1

July 2022

Date: 10/07/2022

Ref: Climate Station\Docs\EN\UserManual

Abstract / Résumé
This document provides instructions for the exploitation of the Climate Station system, including the visualization/analysis component.

	Name	Position
Prepared by	Marco Clerici	JRC-EC responsible for ClimSA
Contributions/Reviews by	Christophe Lavaysse	JRC-EC thematic Expert for ClimSA
	Jurriaan Van't Klooster	IT-GIS Specialist
	Vijay Charan Venkatachalam	IT-GIS Specialist
	Dario Simonetti	IT-GIS Specialist
	Fabrizio Cappucci	IT-GIS Specialist

	Details	Date
Version history	Draft 1.1.0	June 2022
1.1.1	Updated with Portfolio, Processing, F4P and IMPACT sections.	August 2022

CONTENTS

Table of Contents

1. INTRODUCTION.....	1
1.1 SCOPE OF THE DOCUMENT.....	1
1.2 DOCUMENT ORGANIZATION.....	1
2. OVERVIEW OF THE CLIMATE STATION.....	2
2.1 SYSTEM CONCEPT	2
2.2 SYSTEM STRUCTURE AND CONFIGURATIONS	3
2.3 APPLICATION OVERVIEW	3
2.4 CLIMATE STATION ESSENTIAL CONCEPTS	5
2.4.1 <i>Product</i>	5
2.4.2 <i>Version</i>	5
2.4.3 <i>Subproduct</i>	6
2.4.4 <i>Dataset</i>	7
2.4.5 <i>Mapset</i>	7
2.4.6 <i>Sources of datasets (or Datasource)</i>	9
2.4.7 <i>Services</i>	10
2.4.8 <i>Climate Station standard format conventions</i>	11
2.4.9 <i>Importing datasets</i>	13
3. USER'S GUIDE.....	14
3.1 ACCESSING THE USER INTERFACE	14
3.2 REGISTER AND LOGIN.....	14
3.3 MAIN MENU	14
3.4 DASHBOARD	16
3.4.1 <i>Services control</i>	16
3.5 PORTFOLIO	18
3.6 ACQUISITION	20
3.6.1 <i>Functionality</i>	21
3.7 DATA MANAGEMENT	30
3.7.1 <i>Functionality</i>	30
3.8 PROCESSING.....	34
3.8.1 <i>Functionality</i>	34
3.9 ANALYSIS.....	36
3.9.1 <i>Workspace functionalities</i>	36

3.9.2	<i>Mapview functionality</i>	40
3.9.3	<i>Legends administration</i>	62
3.9.4	<i>Layer administration</i>	71
3.9.5	<i>Graph view functionalities</i>	75
3.10	FITNESS FOR PURPOSES	99
3.10.1	<i>Description of the available F4P methods</i>	99
3.10.2	<i>Running the F4P methods</i>	100
3.11	IMPACT TOOLBOX	103
3.12	JUPYTER NOTEBOOKS	105
3.13	HELP	106
4.	REFERENCE GUIDE (ADVANCED USERS)	107
4.1	DETAIL OF SERVICES	108
4.1.1	<i>Get EUMETCast Service</i>	108
4.1.2	<i>Get Internet</i>	111
4.1.3	<i>Data Store Service</i>	117
4.1.4	<i>Ingestion Service</i>	118
4.1.5	<i>Processing Service</i>	123
4.1.6	<i>System Service</i>	126

ACRONYMS and DEFINITIONS

AMESD	African Monitoring of Environment for Sustainable Development
ACMAD	African Centre of Meteorological Applications for Development
AGRHYMET	Centre Régional de Formation et d'Application en Agrométéorologie et Hydrologie Opérationnelle
AU	African Union
EO	Earth Observation
EUMETSAT	European Organisation for the Exploitation of Meteorological Satellites
EUMETCast	EUMETSAT's primary dissemination mechanism for the near real-time delivery of satellite data and products
FTP	File Transfer Protocol
GIS	Geographical Information System
JRC	Joint Research Centre of the European Commission
REC	Regional Economic Communities
RIC	Regional Implementation Centre
TA	Technical Assistance
TAT	Technical Assistance Team
THEMA	Regional and Continental Thematic Actions

1. INTRODUCTION

1.1 SCOPE OF THE DOCUMENT

This document describes the functionalities of Climate Station (indicated as 'Station' in the following) application and explains how the final User can benefit from its features. It is meant mainly for the thematic expert making use of the system, and describes both the 'processing' and 'visualization/analysis' components.

1.2 DOCUMENT ORGANIZATION

The present document is structured into the following chapters:

- Chapter 2: Overview of the Climate Station

This is the basic introduction to the Climate Station, which provides application's rationale, an overview of the GUI, some essential notions to understand the system functioning and an overview of the existing services..

- Chapter 3: Climate Station User Interface

It describes all functionalities that can be controlled through the GUI by the User, namely the Dashboard, Portfolio, Acquisition, Processing, Data Management, Analysis, Fitness for Purposes, IMPACT, Jupyter Notebooks, System Settings and Help panel.

This is intended for the Thematic User, in order to understand how to control and modify the operations of the application, and how to perform the analysis on the Climate and EO datasets.

- Chapter 4: Reference Guide

It contains a detailed description of the services and is meant for Advanced Users (the Basic User should be able to manage the system – without addition of customized treatments) e.g. the people in the RICs. Here we go in the detail of what the services do, and all the tables used for their customization.

2. OVERVIEW OF THE CLIMATE STATION

2.1 SYSTEM CONCEPT

The Station is meant to be a processing server for EO and Climate datasets, rather than a stand-alone GIS platform (like QGIS or similar solutions). The functioning of the application is organized around a number of Services, as displayed in Figure 1, namely:

- Data Acquisition: systematically acquire EO and Climate data from various sources, through FTP, HTTP protocols, APIs and locally available file systems, as a EUMETCast Receiving Station. Therefore, there are several 'get' services that can be configured and controlled independently:
 - Get EUMETCast
 - Get Internet (data from remote FTP and HTTP servers)
 - Get Data Store
- Data Ingestion: the 'Ingest' Service converts the files from the format under which they are acquired in (the so called 'native' format) into GeoTiff or NetCDF, also called 'pivot' formats. Optionally, this operation includes geographical re-projection and clipping to a specific region of interest;
- Processing Service: to derive from the input data additional products, like long term statistics, anomalies, and other added-value indicators;
- System Service: to run a number of 'house-keeping' and background tasks, including managing the local file system and cleaning temporary directories.

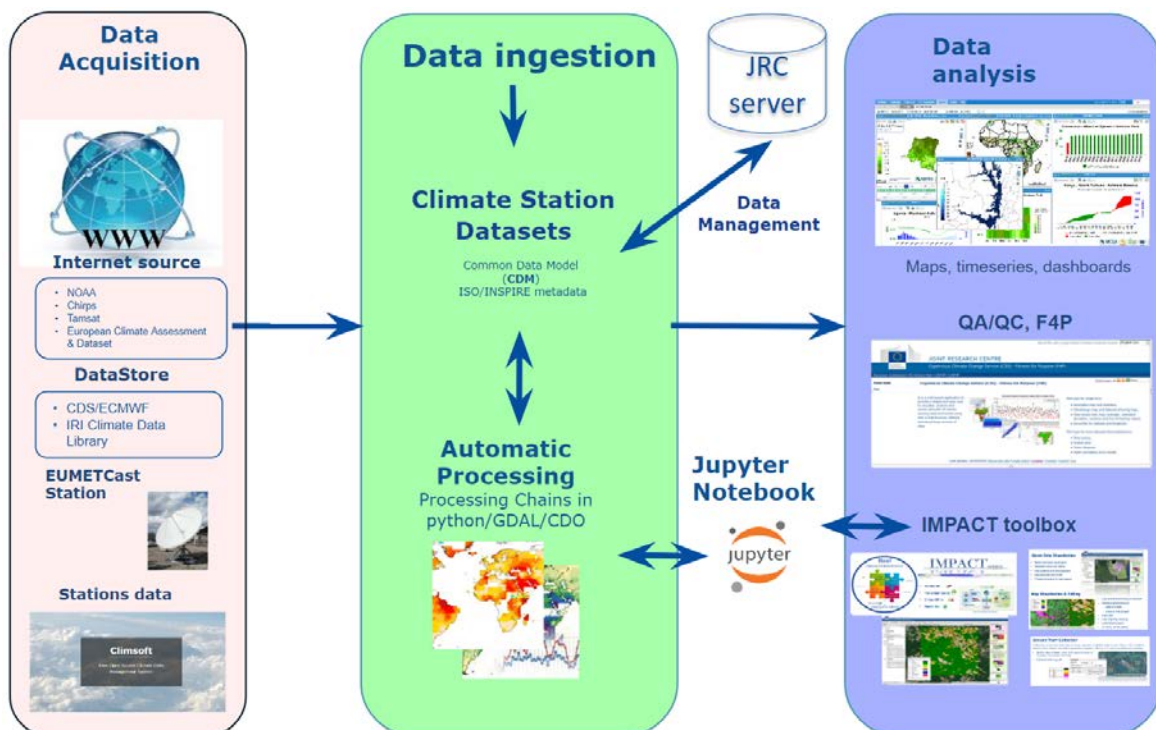


Figure 1: Overview of the Services running on the Station

2.2 SYSTEM STRUCTURE AND CONFIGURATIONS

The Station's services and the processing components are written in python; the visualisation and GUI component are written in JavaScript (using Ext JS library). A PostgreSQL database stores the EO and Climate products definition, settings for accessing server storing data through the 'get' services and all relevant user configurations.

Several software and libraries are required, including the GDAL library and its python wrapper for geo-processing, Mapserver for maps rendering, and a series of non-standard python modules, such as ruffus, a computation pipeline library, for the processing engine.

All the components of Climate Station such as database, GUI, IMPACT tool, Mapserver are containerized and deployed in the server using the Docker.

2.3 APPLICATION OVERVIEW

A web interface, found at the address <http://localhost:8080> allows controlling the Station. It folds different controls in separate tabs, namely:

- **Dashboard:** it presents the overall status of the Station, and offers the control of all the enabled services (see Figure 2)
- **Portfolio:** to configure the list of datasets in the Station, mainly to activate products for acquisition and processing.
- **Acquisition:** to view and control the status of the services for retrieving and ingesting the EO and Climate data; it represents and gives access to the 'Get' (internet and datastore) and 'Ingestion' services, represented in Figure 1: Overview of the Services running on the Station .
- **Processing:** to start and stop the processing of new products, i.e. to control the 'Processing' Service.
- **Data Management:** it lists all available data sets, both those acquired and processed by the Climate Station, showing the completeness of time series (and thus listing missing data).
- **Analysis:** to perform the data analysis and generate images for bulletins/reports.
- **Fitness for Purposes:** it offers the capability to perform comparison among different products. The comparison can be conducted in terms of statistical analysis and/or using global (or regional) maps.
- **IMPACT toolbox:** it offers a combination of remote sensing, photo interpretation and processing technologies in a GIS environment, allowing non specialist users to easily accomplish all necessary pre-processing steps while giving a fast and user-friendly environment for visual editing and map validation.
- **Jupyter Notebooks:** it proposes a working environment of python (ipykernel notebook) where user can code their process to create the indicators from the existing data and visualize them.
- **System Settings:** to control the application settings (including the region, log level, and working directories paths), and to generate system reports.
- **Help:** to read system help files: allows downloading the pdf files and access reference web sites.

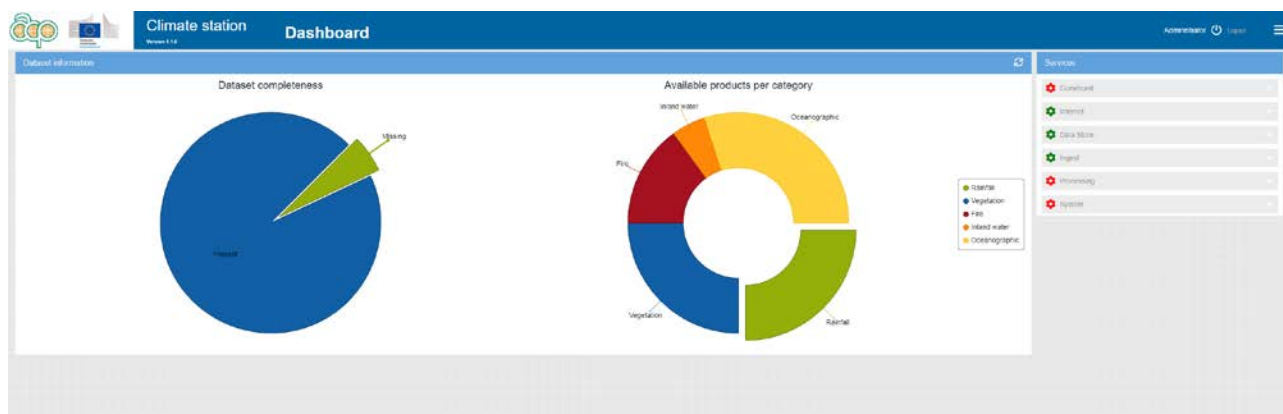


Figure 2: View of Climate Station Dashboard

2.4 CLIMATE STATION ESSENTIAL CONCEPTS

This section presents concepts and definitions underpinning the design and implementation of the Station; whenever possible, definitions make use of examples, and reference to international standards is made.

2.4.1 Product

A 'Product', either from EO or models, is characterized by its geographical footprint (the Earth area covered by the image), the image's geographic or projected co-ordinate system, the time frame for synthesis images (daily, 10-day or longer synthesis) and the product update frequency (15-minute, daily, 10-day). These parameters generally depend on the satellite type and the on-board sensor characteristics.

Other characteristics must also be considered, such as the file format (grib2, NetCDF, HDF4 or HDF5), the data distribution policy, or the distribution mean (digital radio broadcast such as EUMETCast or the Internet). In the picture above the 'Products' from Copernicus GLS are displayed as an example.



Figure 3: 'Products' on the Copernicus web site

2.4.2 Version

A product's 'Version' identifies a specific collection of images, depending mainly on the algorithm used for their computation; the various versions of the Copernicus products are displayed in Figure 4 under the column 'Algorithm version'. For the 'incoming' products on the Climate Station, the version is the one defined by the data provider.

Copernicus Global Land Service

Providing bio-geophysical products of global land surface

Home Products News Product Access

Overview of the portfolio

The portfolio of the Global Land service contains biophysical variables which describe the state and the evolution of the continental vegetation and soils, the energy budget at the surface, and the water cycle.

Many products are currently moving from SPOT-VEGETATION to PROBA-V sensor and their status will be updated frequently.

Theme	Variable	Algorithm Version	Near real time status	Archive status
Vegetation	Fraction of photosynthetically active radiation absorbed by the vegetation	3	In development	In development
		2	In development	In development
		1	Demonstration	Operational
	Fraction of green vegetation cover	3	In development	In development
		2	In development	In development
		1	Demonstration	Operational
	Leaf Area index	3	In development	In development
		2	In development	In development
		1	Demonstration	Operational
	Normalized Difference Vegetation Index	2	Pre-operational	Operational
		1	N/A	Operational
	Vegetation Condition Index	1	Demonstration	Operational
	Vegetation Productivity Index	1	Demonstration	Operational
	Dry Matter Productivity	1	Demonstration	Operational

Figure 4: Version of Copernicus GL products

2.4.3 Subproduct

An acquired product might contain more than a single variable or layer. For example, Spot-Vegetation NDVI has 2 layers: the NDVI itself and a Status Map showing a quality flag for each pixel. Furthermore, starting from the incoming product several added-value products and indicators can be generated, such as long term statistics and anomalies. Therefore, we decided to have a ‘two-level’ identification approach so that more than one **subproduct** can be associated to the same **product**. More specifically, for each product on the Climate Station there will be:

- One ‘native’ product, which has exactly the same name of the product with the ‘_native’ suffix, and refers to the ‘incoming’ EO and climate product. This ‘subproduct’ cannot be visualized in the Climate Station, it is actually a ‘reference’ for the incoming dataset, i.e. to the files received on the Climate Station before their ingestion;
- One or more ‘ingested’ products, according to the number of layers that are extracted from the incoming dataset;
- Zero, one or more ‘derived’ products, computed on the Climate Station by the processing Service.

For example (Figure 5) the **subproducts** for ‘fewsnet-rfe’ (version 2.0) are displayed: a single ‘native’ is defined - as it is always the case – named ‘fewsnet-rfe_native’; a single ‘ingested’ product exists, as the incoming dataset has no any ancillary information (and the rainfall estimate), while several subproducts are generated on the system.

productcode [PK] character varying	subproductcode [PK] character varying	version [PK] character varying	defined_by character varying	activated boolean	category_id character varying	product_type character varying
fewsnets-rfe	fewsnets-rfe_native	2.0	JRC	TRUE	rainfall	Native
fewsnets-rfe	10d	2.0	JRC	FALSE	rainfall	Ingest
fewsnets-rfe	1monmin	2.0	JRC	FALSE	rainfall	Derived
fewsnets-rfe	1monmax	2.0	JRC	FALSE	rainfall	Derived
fewsnets-rfe	1mondiff	2.0	JRC	FALSE	rainfall	Derived
fewsnets-rfe	10dmax	2.0	JRC	FALSE	rainfall	Derived
fewsnets-rfe	10dmin	2.0	JRC	FALSE	rainfall	Derived
fewsnets-rfe	1moncum	2.0	JRC	FALSE	rainfall	Derived
fewsnets-rfe	1monavg	2.0	JRC	FALSE	rainfall	Derived
fewsnets-rfe	10dnp	2.0	JRC	FALSE	rainfall	Derived
fewsnets-rfe	10davg	2.0	JRC	FALSE	rainfall	Derived
fewsnets-rfe	10dperc	2.0	JRC	FALSE	rainfall	Derived
fewsnets-rfe	1monperc	2.0	JRC	FALSE	rainfall	Derived
fewsnets-rfe	10ddiff	2.0	JRC	FALSE	rainfall	Derived
fewsnets-rfe	1monnp	2.0	JRC	FALSE	rainfall	Derived

Figure 5: Subproducts existing for the 'fewsnets-rfe' product, 2.1 version.

2.4.4 Dataset

A **dataset**, in Station's jargon, is an ensemble of images related to the same **subproduct**, for a given geographic extent and temporal window. The concepts of 'dataset' and 'subproduct' are close; a 'dataset' stresses the idea of having an ensemble of files generated for the same product for a given region and a given period of time.

2.4.5 Mapset

The '**mapset**' is the ensemble of information defining a map representation of a raster product, using the following characteristics:

1. Spatial Reference System (SRS) - defined through the SRID¹ and referring, by default, to the EPSG authority. It logically includes:

- 1.1 Geographic Coordinate System (GCS), including Datum.
- 1.2. Map Projection (if any - name and parameters).

2. Pixel size (unit, value)
3. Boundary Box (ULx/y, LRx/y) or 'Extent' or 'Origin'
4. Raster size (Xsize, Ysize)

The '**mapset**' replaces the concept of 'ROI' (existing on Climate Station 1.0) and offers the possibility to have all geo-referencing information in a single object, which is stored in a single table of the database, and is convenient for direct re-projection of an image from an original to a target 'mapset'.

¹ see http://en.wikipedia.org/wiki/Spatial_reference_system

mapsetcode [PK] character varying	defined character	descriptive_name character varying
CHIRP-Africa-5km	JRC	Global Chirp 0.05 deg
CHIRP-Global-5km	JRC	Global Chirp 0.05 deg
default	JRC	Default mapset
FEWSNET-AEA-Africa-8km	JRC	Africa 8km (FEWSNET) - Native Proj since 1/1/2009
FEWSNET-AEA-Africa-8km-old	JRC	Africa 8km (FEWSNET) - Native Proj until 21/12/2008
FEWSNET-Africa-8km	JRC	WSGS Africa for FEWSNET
MODIS-Africa-4km	JRC	Africa 4km (MODIS)
MODIS-CEMAC-500m	JRC	CEMAC 500m
MODIS-Global-4km	JRC	Global 4km
MODIS-IOC-4km	JRC	IOC 4km
MODIS-UoG-4km	JRC	UoG 4km
MSG-satellite-3km	JRC	MSG disk 3km
PROBAV-Africa-1km	JRC	Africa 1 km from 10x10 tiles (VITO)
SPOTV-Africa-1km	JRC	Africa 1km
SPOTV-Africa-500m	JRC	Africa geografic 500m
SPOTV-CEMAC-1km	JRC	CEMAC 1km
SPOTV-ECOWAS-1km	JRC	ECOWAS 1km
SPOTV-IGAD-1km	JRC	IGAD 1km
SPOTV-IOC-1km	JRC	IOC 1km
SPOTV-SADC-1km	JRC	SADC 1km
SPOTV-Sahel-1km	JRC	Sahel 1km
SPOTV-UoG-1km	JRC	UoG 1km
TAMSAT-Africa-4km	JRC	Africa 4km (TAMSAT)

Figure 6: example of mapsets defined on the station

In Figure 6 the mapsets defined in the first release of Station are listed. As you can see, they have different spatial resolution (pixel size from 30m to 8 km), and they refer to the full continent or for one of the Regions, which are identified after normally the name of the Regional Economic Communities (ECOWAS, IGAD, IOC and so on).

2.4.6 Sources of datasets (or Datasource)

Datasets of the Station are retrieved from the EUMETCast dissemination (*i.e.* from EUMETCAST receiving Station), from remote servers by internet (HTTP or FTP) and from APIs (as C3S Data Store & IRI data library). Therefore, each of them represents a source of Datasets, and a set of variables have to be indicated to retrieve a dataset from them (e.g. the server URL, the access credential or the naming rules).

The 'EUMETCast' datasources are the simplest, since only few properties are essential: a unique identifier of the datasource itself (`eumetcast_id`) and a regular expression to match the filenames associated to a dataset (`filter_expression_jrc`). The service is described in full detail in the 4.1.1 paragraph.

The 'internet' datasources include some additional elements needed to access the remote servers and repositories, such as the base URL of the data provider, login credentials (username/password), the regular expression to filter the datasets names, and a time frame defined through 'start' and 'end' dates.

The 'DataStore' datasources make use of the configuration files which are added by the user understanding the data retrieval mechanism from the CDS and IRI portal. For CDS, configurations taken from the API request within their dataset retrieval portal whereas for IRI data library, configurations taken from the expert mode of specific datasets from their portal

Additional information for managing the datasource is defined in the '***datasource_description***' table, which contains elements to describe the 'incoming' files in terms of:

- File naming rules and file extension, which allows the 'get' services' to identify and manage the incoming files, e.g. by extracting the date/time of the image.
- The geo-reference, i.e. geographic coverage (e.g. global) and native mapset; note that in some cases the information on the geo-reference is coded in the incoming file itself, and there is no need to fill this field.
- The pre-processing type to be applied during the ingestion, which varies according to the file format (HDF, GTiff, NetCDF) and the tiles organization (see 4.1.4 for more detail)

2.4.7 Services

The following Services are implemented on the system (see also Figure 1):

- Get EUMETCast: to copy data from EUMETCast PC to the Station.
- Get Internet: to copy data from remote servers (any data provider available online) to the Station
- Get Data Store: to copy data from the Climate Data Store(CDS) & IRI data library portal to the Station
- Ingestion: to convert the incoming products into GeoTiff or NetCDF format, and optionally re-project to the defined 'mapset'.
- Processing: to derive from the incoming products additional indicators.
- System: to manage all background operations, such as clean the temporary files, check the metadata & sanity check, data/database synchronization between the Station components (if more than one) or other servers, database dump, system diagnostic.

The Services are executed on the Station as 'daemons', e.g. as a detached process that runs in the background: they should, in principle, be permanently activated.

The normal operations to be executed by the User to control the Services are:

- Define/verify the settings on the Climate Station for each of the services (*e.g.* control that the 'get' and 'ingest' for a given product is activated)
- Activate the Service from the GUI and monitor its execution.
- Optionally modify the Settings on the fly (no need of re-starting the Service)
- Optionally stop or restart a Service in case of unforeseen circumstances.

2.4.8 Climate Station standard format conventions

The files ingested on the Station, or generated by the processing service, present some common characteristics that are been defined to facilitate the exploitation of the Users, not only on the Station but also in third-party software. These characteristics include a common file format (GeoTiff or NetCDF), a unique convention for scaling the physical values in digital number and for encoding the 'no-data', and a list of metadata, written as 'tags' in the files.

Data coding

All raster files contain 'digital values' coded over bytes, integers or float types. In order to convert these numbers in physical quantities, the following equation is applied:

$$Phys. Value = DN * scale_{factor} + scale_{offset}$$

On the Station the following convention is (mostly) adopted:

scale_factor= 10^N when N is an integer, positive or negative
scale_offset= 0

This convention facilitates the User in understanding the contents of the raster files, while looking at them from third-party software (like QGIS).

Nodata encoding

The 'nodata' value is a numeric value used to indicate that no observations are available over some pixels of the image. It is coded in the metadata of the image. On the Station the nodata encoding is standardized, so that for the simplest data types (BYTE, INT16 and UINT16) it depends on the data type, as shown in the following table:

Data type	Nodata value
BYTE	255
INT16	-32767/8
UINT16	65536

Table 1: Nodata default coding for data type

For the other data types (INT32, UINT32, FLOAT32 and FLOAT64), which are by the way rarely used in the system, there is more freedom in the nodata coding, and we normally adopt the same value as in the incoming images.

List of metadata

The images in the Station's standard format contain a list of metadata that are produced during the ingestion or the processing as GeoTiff or NetCDF tags. They are visible, e.g., by doing 'gdalinfo' command followed by the name of the image.

The role is twofold:

- For the User: to extract information from the image, e.g. in order to see when it has been produced, on the basis of which input files, or what are the scaling factor and offset.

- For the Station itself: to extract information (e.g. the product, version, subproduct, mapset) needed to place the image in the correct director.

Name	Typical value	Comments
eStation_category	rainfall	Category of the product (as in the GUI, in Acquisition, Processing and Data Management Tabs).
eStation_comp_time	2015-04-23 14:17:21	Time of computation of the image (local time, taken from the PC)
eStation_conversion	Phys = DN * scaling_factor + scaling_offset	Fixed (see 'data coding' above)
eStation_date	20100101	Time of the EO and Climate product
eStation_date_format	YYYYMMDD	Format of the date
eStation_defined_by	JRC	Who has defined the product (JRC or User)
eStation_descr_name	TAMSAT RFE	Descriptive name of the product
eStation_description	TAMSAT Rainfall estimates	Longer description of the product
eStation_es2_version	2.1.0	Climate Station.1 version
eStation_frequency	e1dekad	Frequency of the product
eStation_input_files	/data/ingest/rfe2010_01-dk1.nc	List of input files used to generate the product. It might be a list of 'native' products (as in the example here) or Climate Station.1 products
eStation_mac_address	6c:ae:8b:52:77:d2	Unique identifier of the machine where the product has been generated.
eStation_mapset	TAMSAT-Africa-4km	Product mapset (see 2.4.5).
eStation_nodata	-32768	Nodata value coding (see above)
eStation_product_version	2.0	Product Version
eStation_provider	TAMSAT - JRC	Provider of the data. It might be a Space Agency, a Project, JRC or a RIC.
eStation_parameter	Parameters	Parameters for deriving indicatore
eStation_scaling_factor	1.0	Scaling factor for DN to physical value conversion (see above)
eStation_scaling_offset	0.0	Scaling offset for DN to physical value conversion (see above)
eStation_subdir	tamsat-rfe/2.0/TAMSAT-Africa-4km/tif/10d/	Subdirectory where the product is located on Climate Station, to be added to the data processing base dir (/data/processing by default).
eStation_subProduct	10d	Name of the subproduct
eStation_unit	mm	Physical Unit of the product (once the conversion to physical value is applied)

Table 2: List of standard Station metadata

2.4.9 Importing datasets

On the Station several mechanisms exist to acquire data. In normal operations, as described above, the 'Get' (from EUMETCast, Internet and Data Stores) and 'Ingestion' services feed the system (see 2.4.9.1). This is meant for near real time reception of data, not archives or historical datasets.

In fact, at the installation of the Station, normally the file system is populated with 'historical archives', i.e. datasets representing the most recent years for the various subproducts, in order to allow comparative analysis (see 1.1.1.1).

When some data are missing on the station, e.g. for an interruption in the acquisition services, it is possible to identify the gaps in the Data Management page, and create a 'request' to fill the gap (see **Error! Reference source not found.**).

2.4.9.1 Acquisition of 'native' datasets

The 'standard' mechanism is to 'get' the data from EUMETCAST receiving Station (through the 'Get EUMETCast' service) and from http/ftp servers ('Get Internet' service) and DataStore service. The files are retrieved on the machine in their original ('native') format, as generated by the data provider, and subsequently ingested. This mechanism is monitored and controlled from the 'Acquisition' interface (see 3.5).

2.4.9.2 Installation of Historical Archives

At the moment of the installation of the Station, the machine has to be fed with historical datasets in order to provide the thematic User with time series for its analysis. These datasets represent several tenths of GB, and they are a collection of files in Station format that are 'packed' into a zipped tar file (.tgz) or tiff files.

The archive has to be mounted to the Station computer on a location that corresponds to the 'Archive Dir' path specified in the system setting. Then a specific routine is activated to parse the archive and copy to the local machine the datasets of interest for the User, according to the 'Acquisition' and 'Processing' settings.

2.4.9.3 Completing datasets from Data Management page

When a gap is existing, or additional temporal windows are needed, a request can be generated from the Data Management tab (see 3.7). This request is basically a list of images missing/desired on the local machine. The request is sent to the JRC reference Station, which creates and transmit to the Station the missing files.

3. USER'S GUIDE

In the Station most of implemented functionalities are accessed through the user interface (GUI) and no integration in the hosting OS menu has been implemented. The current chapter describes all the operations that can be performed from the User Interface.


3.1 ACCESSING THE USER INTERFACE

The GUI can be opened from <http://localhost:8080>, each with its own IP address or hostname depending on the configurations during the installation.

- To access the user interface locally from Climate Station open the installed browser Mozilla Firefox and go to the following address:

<http://localhost:8080>

(User interface locally on Climate Station)

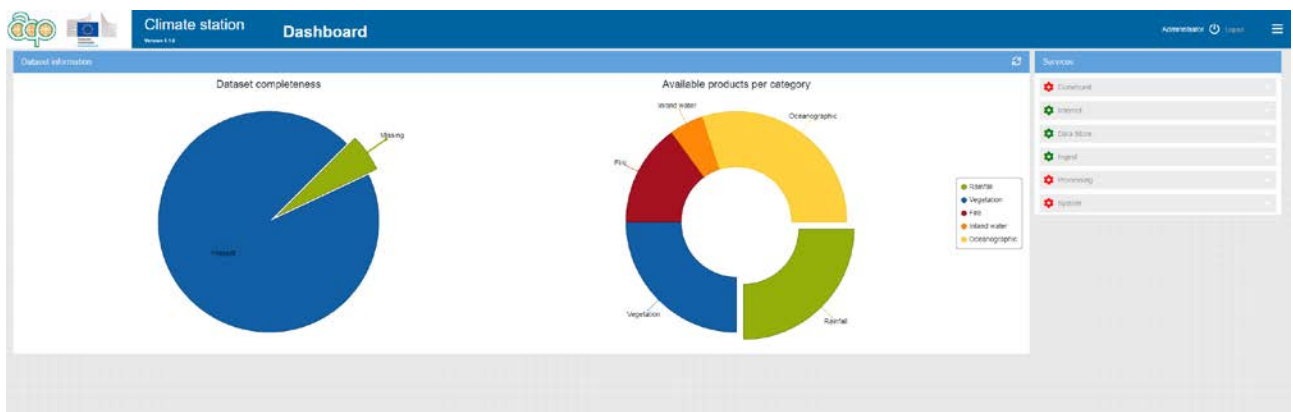

3.2 REGISTER AND LOGIN

3.3 MAIN MENU

The functionalities available on the system are presented in the following pages (tabs):

- **Dashboard:** presents an overview of the Station and gives control over the services;
- **Portfolio:** to configure the list of datasets in the Station (mainly to activate products for acquisition and processing);
- **Acquisition:** to view and control the status of the services for retrieving and ingesting the EO and Climate data;
- **Processing:** to start and stop the processing of new products;
- **Data Management:** lists available data sets, both those acquired and processed by the Station, showing the completeness of time series, and thus allowing the retrieval of missing datasets;
- **Analysis:** to perform the data analysis and generate images for bulletins/reports.
- **Fitness for Purposes:** It offers the capability to perform comparison among different products. The comparison can be conducted in terms of statistical analysis and/or using global (or regional) maps.
- **IMPACT:** It offers a combination of remote sensing, photo interpretation and processing technologies in a GIS environment, allowing non specialist users to easily accomplish all necessary pre-processing steps while giving a fast and user-friendly environment for visual editing and map validation.

- **Jupyter Notebooks:** It offers user, a working environment of python (ipykernel notebook) where Users can code their process to create the indicators from the existing data and visualize them.
- **System:** to control the application settings (log level, Ethernet IPs, and working directories paths), and to generate system reports;
- **Help:** to read system help files: allows downloading the pdf files and access reference web sites.

The primary role of the Station is the **Acquisition, Ingestion and Processing service** and **Analysis** of gathered and locally generated data products.

3.4 DASHBOARD

The dashboard presents an overview of a Station. It shows the status and gives control over the various services on each machine.

When opening the User Interface of the Station in a web-browser, the Dashboard page is shown first, and it is meant to be accessed for the verification of basic functionality and initial diagnostic operations.

3.4.1 Services control


As displayed in Figure 7, there are 6 services running on the Climate Station:



- **Get EUMETCast:** Get (i.e. copy locally) data from the receiving station (EUMETCast Receiving Station) for all activated products that have an activated EUMETCast data source defined.
- **Get Internet:** Get data from internet sources (FTP or HTTP) for all activated products that have one or more activated Internet data sources defined.
- **Get DataStore:** Get data from Climate Data Store (CDS) & IRI data library for all activated products that have one or more activated data sources defined.
- **Ingest:** pre-process incoming raw data, by transforming the file format into the pivot format (GeoTiff or NetCDF), and optionally re-projecting.
- **Processing:** run all defined processing chains that are activated to derive from the incoming products additional indicators.
- **System:** manage all background operations, such as automatic data and database synchronization.


Services

The six services (EUMETCast, Internet, Datastore, Ingest, Processing and System) can individually be started, stopped or restarted and for each of them its log file can be viewed.


- By clicking on the arrow next to the name of a service, a menu will drop down with the items Run, Stop, Restart and “View log file”.



- If the service is running, the ‘wheel’ icon is green  and red  when the service is not running.
- You can refresh the status of a service by clicking on the title of any service menu button.



- When choosing “View log file” of a service, a window will be shown with the content of all the log files (.log, .log1, .log2, etc...) of the service, in reversed order with the latest date on top. Searching within the log file and text highlighting functionality are available.

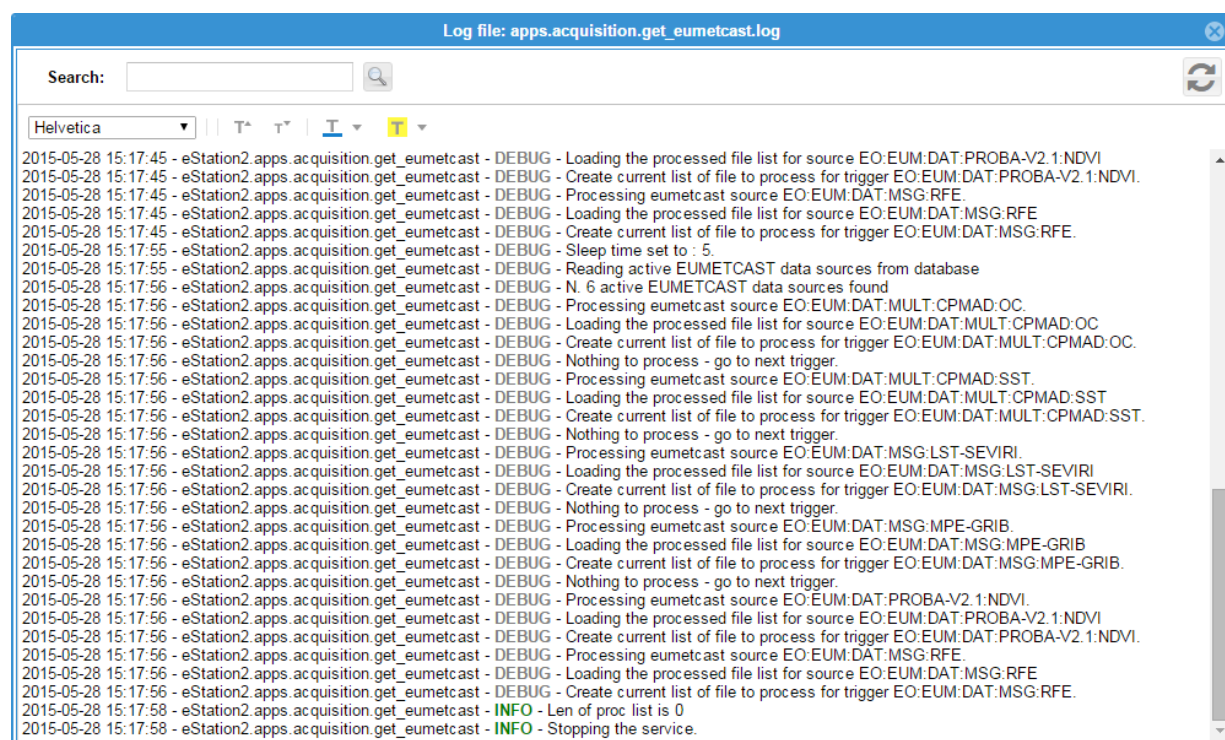

3.5 PORTFOLIO

After the first installation of the Station, all products coded in the application (see the Product Report for the updated list) are deactivated. The Portfolio is the place to manage the list of activated products and their ingestion and related processing chains, over a given region. It is the place where you can:

- See the list of products activated (and the related regions).
- Search for products to activate and add ingestions/processing² for those products, over a selected region.

When opening the Portfolio page from the main menu, you will see the **Current Portfolio** (on the right panel), showing a categorised list of all activated products and their ingestions.

The screenshot shows the 'Portfolio' page. On the left, there is a search panel with filters for Theme (Land, Marine, Other), Product category (Vegetation, Rainfall, Fire, Inland water, Oceanography), and Region (ACP Area, Africa, Central Africa, East Africa). A 'Search' button is at the bottom. The main panel is titled 'Current Portfolio' and has tabs for 'Activate all', 'Deactivate all', and 'Ingestion'. Below these are columns for 'PRODUCTS', 'Active', 'Sub Product', 'Mapset', 'Region', and 'Active'. The table lists several products, including TAMSAT - RFE - 3.0, ARC2 RFE - 2.0, TAMSAT - RFE - 3.1, FEWSNET - RFE - 2.0, CDS ERAS TP HOURLY - 1.0, and CDAS Monthly Precipitation - 1.0. Each product row has a green checkmark in the 'Active' column and a green rectangle in the 'Ingestion' column. The 'Ingestion' column also shows details like '10 Day RFE', '1 Day RFE', 'era5-hourly-total-tp', and 'CDAS month Precip'. The 'Region' column shows 'Africa' and 'ACP Area'. A 'Save to Portfolio' button is at the bottom right.

Figure 7: Overview of the Portfolio page.

On the left side you can search for products to activate. You will have to select one or more product categories to search in and one or more regions of interest. Selecting a theme (Land, Marine or Other) will select the product categories that are within the selected theme.

Once you selected a category and a region, you can click on the “Search” button, and the search result will be displayed on the right. In Figure 9 you see the result of the search for ‘rainfall’ products defined in the Station for either ‘Africa’ or ‘ACP Area’.

The query returns the list of products and regions matching the selection criteria: the status of activation of the product itself and of the ingestion are highlighted in Figure 9 by the green rectangles, on the left and right, respectively. The status of activation is initially false, but

² The ‘Portfolio’ page displays only an ‘ingestion’ columns, but the standard processing chains are also activated for the same regions defined for Ingestion. The result is visible in the ‘Processing’ page.

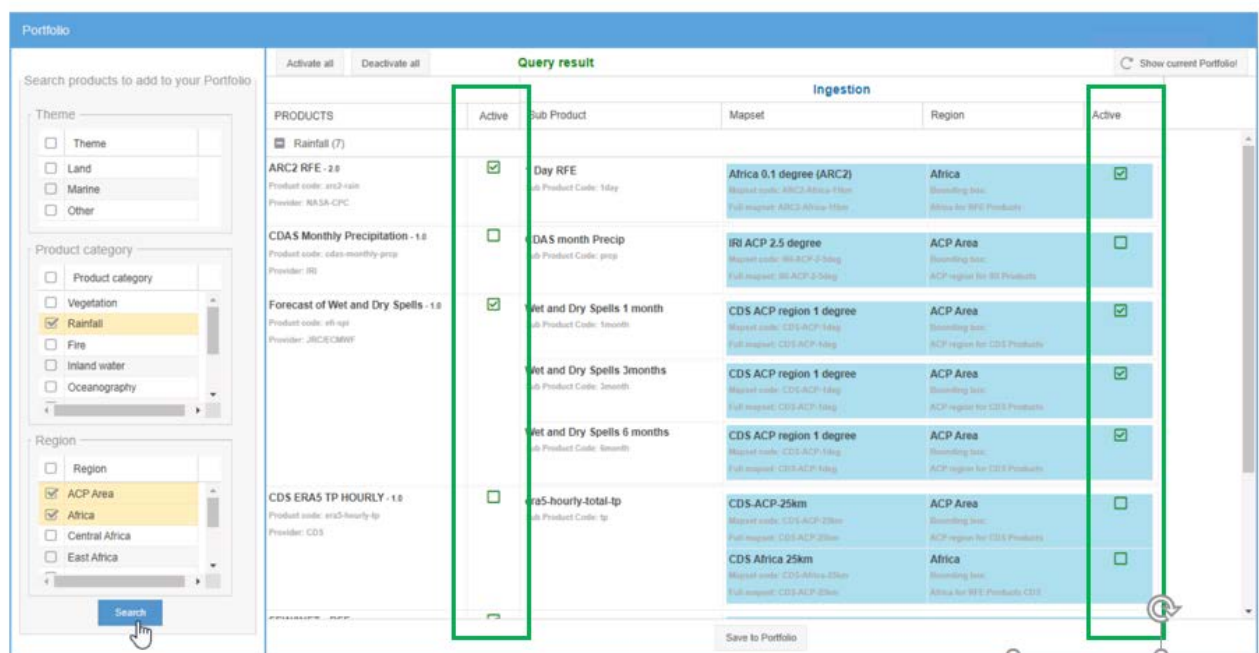


Figure 8: result of the search for products

You can modify the activation a product, or of an ingestion, by clicking on the related checkbox. You can also activate or deactivate all products and ingestions that are in the query result by clicking on the “Activate all” or “Deactivate all” buttons.

When you are happy with your selections, you can save the result in your portfolio by clicking on the “Save to Portfolio” button. When saved, a confirmation message appears and your current portfolio is shown.

3.6 ACQUISITION

Under 'Acquisition' tab two main services are merged:

1. The **Get** data, with its three implementations (from EUMETCast, Internet and Data Stores).
2. The **Ingestion**, i.e. the pre-processing that ingests/converts the incoming raw data for a product to the pivot (GeoTiff or NetCDF) format, and optionally re-projects and subsets them to a specific defined 'mapset'.

The Acquisition tab shows all activated products, grouped by product categories, and allows the user to:

- See and control the status of the 4 services (**Eumetcast**, **Internet**, **Data Store** and **Ingest**)
- Check the status of completeness of the ingested datasets
- Activate or deactivate each individual Get and Ingest defined for a product
- Display the log files associated to each individual Get and Ingest.

As advanced features, the acquisition page also gives the user the possibility to:

- Activate or deactivate a product
- Add a new User defined product
- Assign an existing or newly created Get and Ingest definition.













Product categories	Get	Ingestion					Log		
PRODUCTS	Source	Active	Log	Sub Product	Mapset	Completeness	Active	Log	
Vegetation (3)									
JRC/MARS WSI-HP - v1.0 Product code: wsi-hp Provider: ECMWF/JRC-MARS	JRC MARS vegetation Water satisfaction index - HP for Pasture JRC MARS WSI PASTURE Source: INTERNET	<input checked="" type="checkbox"/>		crop	Africa 1km (SPOTV)	<div><div></div><div>Not any data</div></div>	<input checked="" type="checkbox"/>		
	JRC MARS Water satisfaction index - Crop Source: INTERNET	<input checked="" type="checkbox"/>		pasture	Africa 1km (SPOTV)	<div><div></div><div>Not any data</div></div>	<input checked="" type="checkbox"/>		
MODIS FAPAR - 1.0 Product code: modis-fapar Provider: JRC DRO									
DRO FAPAR 10day normalized (zscore) JRC DRO FAPAR 10ZSCORE Source: INTERNET	<input checked="" type="checkbox"/>		10dzscore	Africa 0.01 deg (MODIS)	<div><div>2022-06-01</div><div>Files: 6</div><div>Missing: 3</div><div>2022-07-21</div></div>	<input checked="" type="checkbox"/>			
DRO FAPAR 10day (monitoring) JRC DRO FAPAR 10DFAPAR Source: INTERNET	<input checked="" type="checkbox"/>		fapar	Africa 0.01 deg (MODIS)	<div><div>2022-06-01</div><div>Files: 6</div><div>Missing: 3</div><div>2022-07-21</div></div>	<input checked="" type="checkbox"/>			
Sentinel3-OLCI NDVI 300m - otoi-v2.0 Product code: vgt-ndvi Provider: Copernicus global land									
PDF-GLS-OLCI-V2.0-NDVI Source:	<input type="checkbox"/>		ndv	Africa 300m (SPOTV)	<div><div></div><div>Not any data</div></div>	<input checked="" type="checkbox"/>			
EUMETCAST EIO-EUM-DAT-OLCI-V2.0-NDVI Source: EUMETCAST	<input checked="" type="checkbox"/>								
Rainfall (6)									

Figure 9: Organization of the Acquisition tab

As it can be seen in Figure 9, the Acquisition display is organized as a table, with a product on each row (see JRC/MARS WSI-HP on the first one, highlighted in green) and the 'Get' and 'Ingestion' attributes in adjacent columns (left to right – highlighted in red).

3.6.1 Functionality

The Acquisition page allows to fully control both get and ingest, ranging from basic operations to more advanced ones. The basic features are accessible from the page as it originally displays, while the advanced features require to 'unlock' the page to access additional features.

Unlocking is by clicking on the  icon, at the left top corner (see Figure 9).

Basic Operations in Acquisition

The following operations can be executed without 'unlocking' the page and entering the advanced mode.

Control the status of the individual Services and their log files

- Like in the Dashboard, the current status of the services is **Eumetcast**, **Internet**, **Data Store** and **Ingest** is displayed, and can be individually changed (started, stopped or restarted) and the related log file can be viewed.




Figure 10: Controlling a Service

[See the list of active products](#)

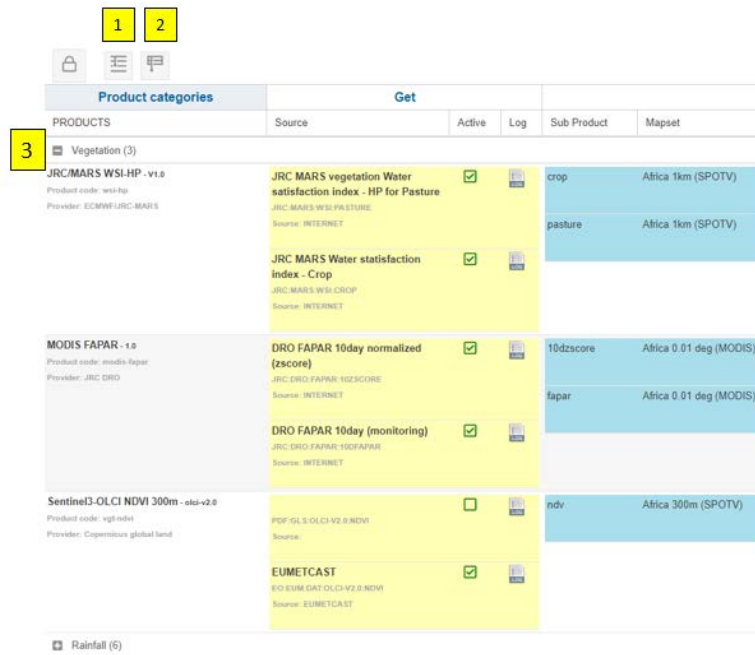



Figure 11: Expand/Collapse products and categories

The products are grouped in categories, and the User can change their visualization by:

- Expanding all product categories to see all their activated products by clicking on the “**Expand all**” button (icon near [1] in Figure 11).
- Collapse all product categories by clicking on the “**Collapse All**” button (icon near [2] in Figure 11).
- Expand or collapse each product category individually by respectively clicking on categories title bar or on the + and – sign on the left of the title of a product category (icon near [3] in Figure 11).

The number between the brackets next to the title/name of a product category indicates the amount of active products within that product category.

- To refresh/reload the Acquisition page click on the refresh button , at the top-right corner of the page.

Operate on the single product

As described above, the Acquisition tab allows controlling ‘get’ and ‘ingest’ of the products. Figure 12 represent the ARC2 RFE product, version 2.0, for which we get the ‘1day’ subproduct over the Africa 0.1 region.




Figure 12: Operate on the single product

From the Basic interface, the User can:


- Activate/deactivate a single 'Get' source:

The check-box near the [1] in Figure 12 represents the status of activation, and can be changed simply clicking on it.

- Activate/deactivate a single 'Ingestion':

The check-box near the [3] in Figure 12 represents the status of activation, and can be changed simply clicking on it.

- View the log file for an individual 'Get' or 'Ingest' defined for a product:

The  icon near the [2] (for Get) and the [4] (for Ingest) numbers. A new window will be shown with the content of all the log files (.log, .log1, .log2, etc...) of the Get or Ingest, in reversed order with the latest date on top (see Figure 13).

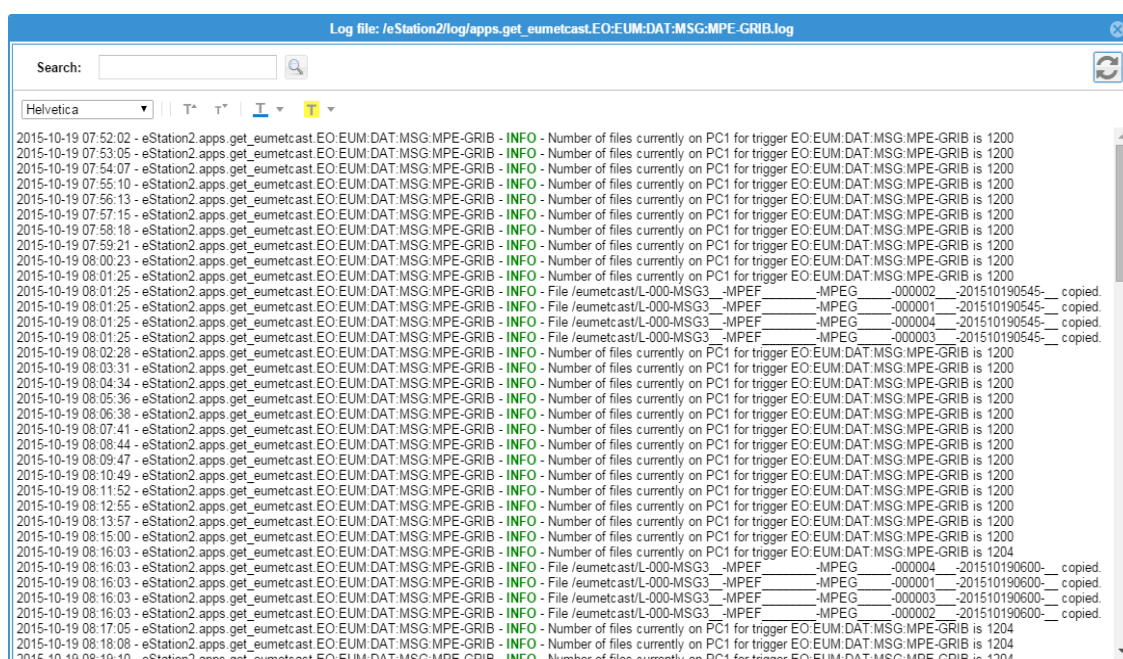



Figure 13: log file for a get EUMETCast source

- Check the status of completeness of ingested datasets. For each 'Ingestion' the Acquisition page

shows a completeness chart , indicating the first date and the expected last date of the dataset, the total expected files for the dataset and the total of missing files.

By clicking on a dataset completeness chart, a list of all the periods of present, missing and permanent missing files pops up (see Figure 14)

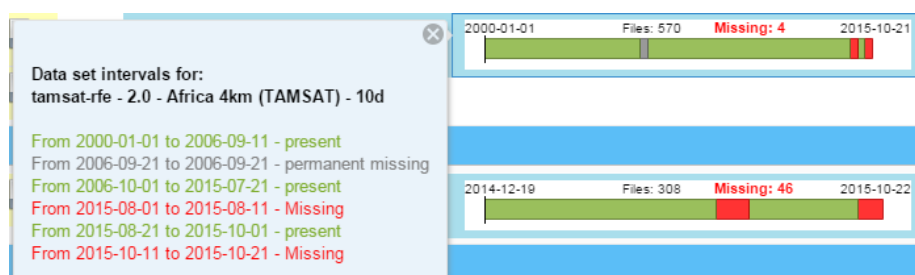




Figure 14: Detail of the completeness chart view

NOTE: for products with a high frequency, for example every 15 or 30 minutes, the completeness chart is created for a shorter period (see example below, with the interval limited to the most recent year for a daily product)/



Advanced Operations

In order to perform advanced operations, the User has to unlock the Acquisition page. The  icon in the top-left corner indicates that the Acquisition page is locked. Click on the icon to unlock the page. Hidden functionality and information will be shown and the lock icon becomes an unlocked icon  (see Figure 15 – top left).

The following paragraphs present the additional features accessible on the unlocked page.

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS

PRODUCTS



PRODUCTS

PRODUCTS

Figure 15: Unlocked Acquisition tab


Change treatment of a product

- Deactivating a product.
The User might decide that an initially defined product is of no interest anymore, and decide he wants to stop its acquisition and processing. By unchecking the icon under the second leftmost column (see [1] - Figure 15) the product is removed from the Acquisition list, and will disappear from the current page. The Station services will stop treating this product (including processing) but the files in the local file system are not deleted, and still visible under Data Management and in the Jupyter Notebooks.
- Change the storing of native products.
As previously described, the various datasets are retrieved to the station in their 'native' format, and converted to GeoTiff or NetCDF by ingestion. The original files might be kept, or deleted, at the User's choice. By default this is activated for the products having a low temporal resolution (10 days).

The  icon near the [3] in Figure 15 means the storing of the native data is activated. The  icon means the storing of the native data is deactivated.

Change the properties of the data-sources associated to a product.

As explained in Section 2, the ‘data sources’ define all properties for retrieving datasets from external sources to the Station. A number of sources are defined by JRC for the distributed portfolio, but the User might want or need to modify some of them, e.g. for a change in the filenames (or credentials) done at the data provider level.

- Change the settings of a EUMETCAST data source. Click on the icon  next to a EUMETCAST data source (see [2] in Figure 15) and a window will be opened where its settings can be changed.

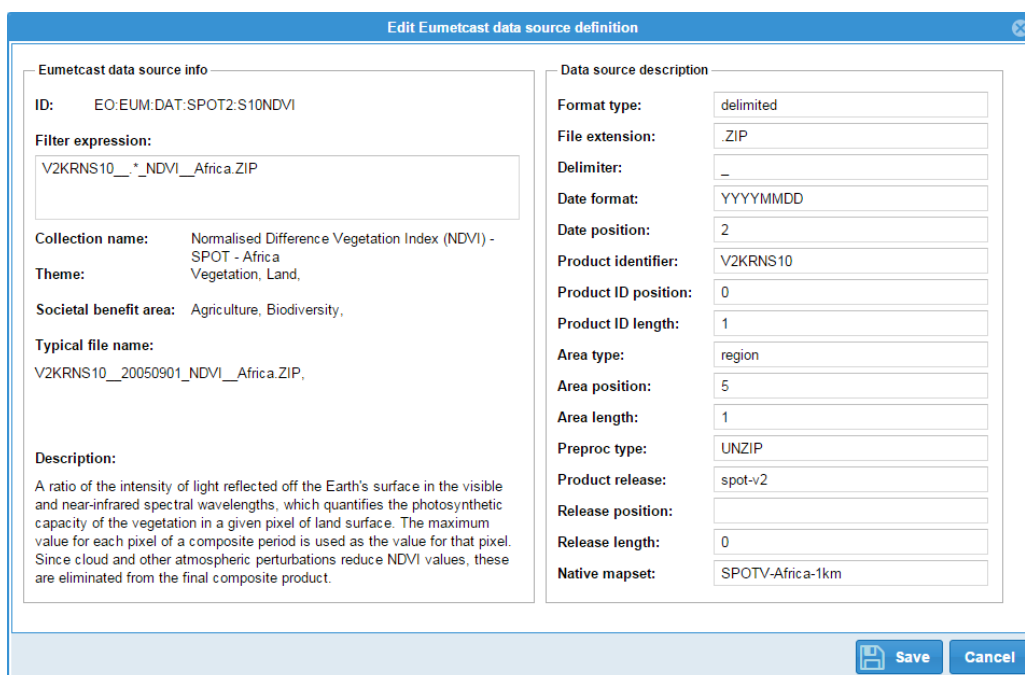


Figure 16: Eumetcast data source definitions

Click on the “Save” button to save any changes made.



- Change the settings of an INTERNET data source. Click on the icon  next to an INTERNET data source ((see [2] in Figure 15)) and a window will be opened where its settings can be changed.

Figure 17: Internet data source definitions

Click on the “Save” button to save any changes made.

Change the Mapset (ROI) of an ingestion

In some cases, you might want to ingest an existing product over an additional region of interest, or modify the existing one.

- Adding a new Mapset³ for a Sub Product, to be ingested:
Click on the  icon next to a Sub Product (see [4] in Figure 15) to open a new window where a Mapset can be selected.

³ See 2.4.5 for the definition of Mapset.

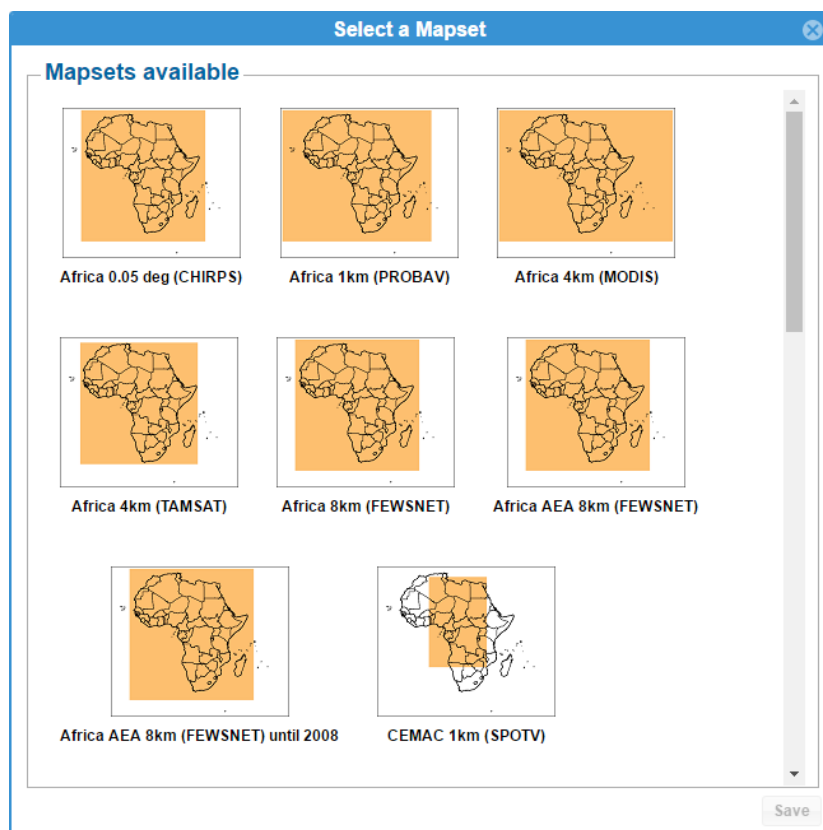


Figure 18: list of available datasets


Select a Mapset and click on the “Save” button. The window will be closed and the selected Mapset will be added to the Acquisition page as a User defined Mapset ingestion for the sub product in question.

Ingestion					Log
Sub Product	Mapset	Completeness	Active		
fapar	Africa 1km	<div>Not any data</div>	<input type="checkbox"/>		
fapar	Africa 4km (TAMSAT)	<div>Not any data</div>	<input type="checkbox"/>	 <small>150</small>	

Click on the delete icon to delete the Mapset from the Sub Product. A confirmation window pops up, asking to confirm the deletion.

Add a product from the predefined list

- All products listed in the Acquisition page are ‘Activated’ products, already defined in the system with assigned data sources and ingestions. For most products, especially those broadcasted through Eumetcast, the JRC has defined their definition, their GET (data source) and Ingestion definition and assignment. To activate an already defined deactivated product, click on the



button. A window will be shown with a categorized list of deactivated products.

Product Administration				
<div> <div>+</div> <div>New product</div> </div>		<div> <div>↺</div> <div>☰</div> </div>		
PRODUCTS	Activate	Subproducts		
<div>✎</div> <div>TAMSAT 10day rainfall - 3.1 - tamsat-test-rfe</div> <div>TAMSAT-JRC</div>	<input type="checkbox"/>	1	<div>🗑️</div>	
<div>✎</div> <div>ARC2 RFE - 2.0 - arc2-rain</div> <div>NASA-CPC</div>	<input checked="" type="checkbox"/>	6		
<div>✎</div> <div>CDAS Monthly Precipitation - 1.0 - cdas-monthly-p...</div> <div>IRI</div>	<input type="checkbox"/>	1		
<div>✎</div> <div>CDS ERA5 TP HOURLY - 1.0 - era5-hourly-tp</div> <div>CDS</div>	<input checked="" type="checkbox"/>	1		
<div>✎</div> <div>CHIRPS - RFE - 2.0 - chirps-dekad</div> <div>Climate Hazards Group</div>	<input checked="" type="checkbox"/>	16		
<div>✎</div> <div>CHIRPS daily - 2.0 - chirps-daily-prcp</div> <div>IRI</div>	<input type="checkbox"/>	1		
<div>✎</div> <div>ECMWF - RFE - OPE - ecmwf-rain</div> <div>ECMWF/JRC-MARS</div>	<input type="checkbox"/>	1		
<div>✎</div> <div>ECMWF S5 monthly TP - 1.0 - s5-monthly-tp</div> <div>CDS</div>	<input checked="" type="checkbox"/>	1		
<div>✎</div> <div>EFI of extreme SPI 1 event - 1.0 - spi1-prodFore</div> <div>JRC/ECMWF</div>	<input type="checkbox"/>	1		
<div>✎</div> <div>FEWSNET - RFE - 2.0 - fewsnet-rfe</div> <div>FEWSNET - JRC</div>	<input checked="" type="checkbox"/>	18		
<div>✎</div> <div>Forecast of Wet and Dry Spells - 1.0 - efi-spi</div> <div>JRC/ECMWF</div>	<input checked="" type="checkbox"/>	3		
<div>✎</div> <div>IRI MARS-2.0 - 2.0 - iri-mars-2.0</div> <div>IRI</div>	<input checked="" type="checkbox"/>	6		

Figure 19: Product Administration view

The ☐ icon means the product is deactivated. Click on the ☐ icon to activate the product. The product will be added to the list of Active products in the Acquisition page.

Close the Product Administration window by clicking on the “Close” button.

NOTE: The current presentation is not exhaustive of all features of the Station. For the more complex operations, video tutorials will be released to help communication to the Users.

3.7 DATA MANAGEMENT

The data management page is intended for having an overview and control over the completeness of the datasets existing on the Climate Station. The datasets shown are grouped by category, as in the previously discussed tabs, and all products 'enabled' on the station are displayed, together with their ingested and derived subproducts. It is important to note that here also the locally derived subproducts, generated by the Processing service, are represented, unlike in the Acquisition tab.




The data management page gives the possibility to complete datasets with missing files, by creating a request job that will automatically download the missing data from a cloud server managed by the JRC.

The screenshot displays the 'Data Management View' interface. At the top, there are navigation icons and a 'Requests' button (labeled 4). The main content is organized into two sections: 'Product categories' and 'Data set completeness'. Under 'Product categories', there are expandable sections for 'Vegetation (3)' and 'Rainfall (9)'. The 'Rainfall (9)' section is expanded, showing a list of datasets. Each dataset entry includes a product code, provider, and a progress bar indicating the status of files (Files, Missing). Numbered callouts highlight specific UI elements: 1 points to a download icon, 2 to a request icon, and 3 to a refresh icon. A tooltip is visible over the 'CDAS month Precip' entry, showing data set intervals and file status.

Figure 20: Data Management View


3.7.1 Functionality


As in Acquisition, the products are grouped by category, and the User can:

- Expand or collapse each product category individually by respectively clicking on the + or – sign on the left of the title of a product category.
- Collapse all product categories, clicking on the  button and to expand all product categories, click on the  button.
- Refresh/reload the Acquisition page, clicking on the refresh  button.

There are three possible ways to create a request job to complement the local data (see Figure 16):

- Create a request to complete all datasets of a product [1].
- Create a request to complete all datasets of a mapset of a product [2].
- Create a request to complete a single dataset [3].

When you click on one of these download icons  a popup window is shown, listing all the datasets with the number of missing files that will be in the request.

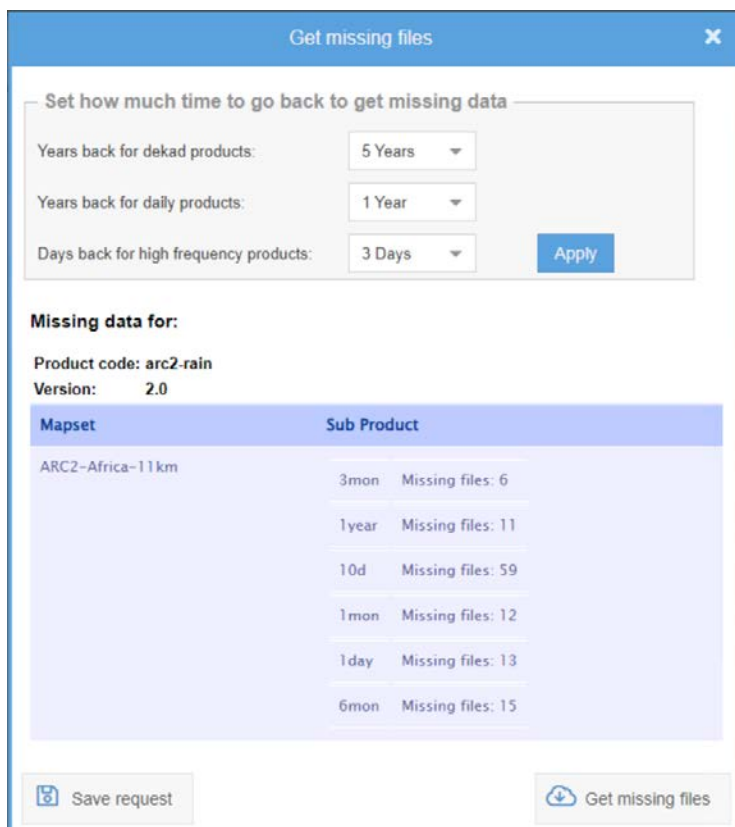

Get missing files

Set how much time to go back to get missing data

Years back for dekad products: 5 Years

Years back for daily products: 1 Year

Days back for high frequency products: 3 Days **Apply**

Missing data for:

Product code: arc2-rain
Version: 2.0

Mapset	Sub Product	Missing files
ARC2-Africa-11 km	3mon	6
	1year	11
	10d	59
	1mon	12
	1day	13
	6mon	15

Save request **Get missing files**

Figure 21: List of datasets for a Request

When your Station is offline, you can click on the **‘Save Request’** button to save/download the request file. Once downloaded, send the file by email to climatestation@jrc.ec.europa.eu. The Climate Station team will generate and send you an archive with the missing files, stated in the request file.


You can directly download the missing files by clicking on the **“Get missing files”** button. The missing files will be downloaded from a cloud server, which is maintained by the JRC.

When there is no internet connection or your Climate Station is in a network with a proxy, a message will popup stating:

“Error connecting to the server, please check if your network is connected to the internet or uses a proxy. Set your proxy settings under the system page!”

If your Climate Station is connected to the internet and, if necessary, you have set your proxy settings under the system page, a request job is created that starts downloading the missing files.

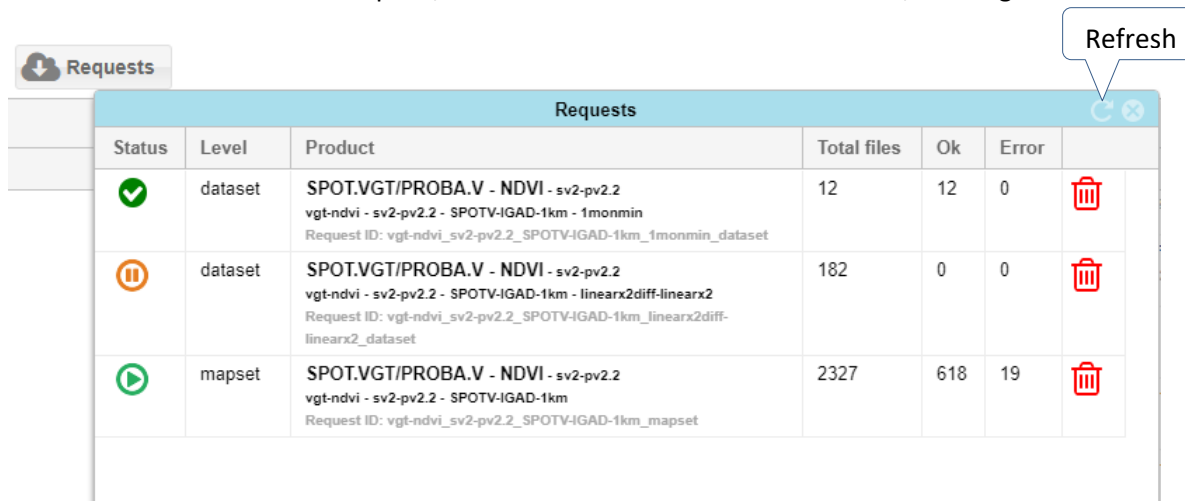


After the creation of a new Request, the administration tool⁴ will be shown, as in Figure 23.




Status	Level	Product	Total files	Ok	Error	
✓	dataset	SPOT.VGT/PROBA.V - NDVI - sv2-pv2.2 vgt-ndvi - sv2-pv2.2 - SPOTV-IGAD-1km - 1monmin Request ID: vgt-ndvi_sv2-pv2.2_SPOTV-IGAD-1km_1monmin_dataset	12	12	0	🗑️
⏸️	dataset	SPOT.VGT/PROBA.V - NDVI - sv2-pv2.2 vgt-ndvi - sv2-pv2.2 - SPOTV-IGAD-1km - linearx2diff-linearx2 Request ID: vgt-ndvi_sv2-pv2.2_SPOTV-IGAD-1km_linearx2diff-linearx2_dataset	182	0	0	🗑️
▶️	mapset	SPOT.VGT/PROBA.V - NDVI - sv2-pv2.2 vgt-ndvi - sv2-pv2.2 - SPOTV-IGAD-1km Request ID: vgt-ndvi_sv2-pv2.2_SPOTV-IGAD-1km_mapset	2327	618	19	🗑️


Figure 22: Requests' administration tool


The status of all requests is listed and each request can be:

- Finished 
- Running 
- Paused 

To delete a request job, click on its  icon.

Refresh the list to update the totals (see figure above).

Pausing and restarting a request job, might give an error message because of no internet connection. The request job will have a red play icon , indicating an error, and the job can be restarted.

- Check the status of completeness of datasets. For each dataset the Data management page shows a completeness chart , indicating the first date and the expected last date of the dataset, the total expected files for the dataset and the total of missing files. By going over a dataset completeness chart with the mouse pointer, a list of all the periods of present, missing⁵ and permanent missing files pops up:

⁴ The administration tool can be opened at any time by clicking on the icon near [4] in Figure 16

⁵ An image might be missing for various reasons, including the station outage periods. Though, it is normal the latest (or two latest) datasets are displayed as missing.



3.8 PROCESSING

The processing page is the interface to the 'processing' service, e.g. to the generation of derived products from the locally available datasets.

The processing page allows the User to control the status of the processing service, and to activate/deactivate a single processing 'chain'. All processing chains are created and defined by the JRC. In the processing page only the enabled processing chains are shown. The relevant processing chains are automatically enabled and activated based on the products activated from the portfolio.

As illustrated in the figure below, a processing 'chain' is based on an Algorithm ('Type + Options' in the middle section) and has one or more subproducts as Input (left section) and one or more derived subproducts as Output (right section). For a description of the different algorithms see 4.1.6.

Expand All

Collapse All

2

Processing

3

Processing inputs				Algorithm			Processing outputs		
Product	Sub Product	Type	Options	Active	Log	Product	Mapset	Sub Product	
Vegetation (3)									
vgt.ndvi - spot.v2	ndvi	SPOTV-Africa-1km	std_ndvi	std_ndvi_all	<input checked="" type="checkbox"/>	Filtered NDVI linearx2	SPOTV-Africa-1km	ndvi_linearx2	
						ICN linearx2	SPOTV-Africa-1km	icn_linearx2	
						Monthly Average NDVI	SPOTV-Africa-1km	1monavg	
						Monthly Minimum NDVI	SPOTV-Africa-1km	1monmin	
						Monthly Maximum NDVI	SPOTV-Africa-1km	1monmax	
						10d linearx2 Average	SPOTV-Africa-1km	10davg_linearx2	
						10d linearx2 Minimum	SPOTV-Africa-1km	10dmin_linearx2	
						10d linearx2 Maximum	SPOTV-Africa-1km	10dmax_linearx2	
						10d linearx2 Median	SPOTV-Africa-1km	10dmed_linearx2	
						VCI linearx2	SPOTV-Africa-1km	vci_linearx2	
vgt.ndvi - sv2-pv2.1	ndvi	SPOTV-Africa-1km	std_ndvi	std_ndvi_all	<input checked="" type="checkbox"/>	10d linearx2 Maximum	SPOTV-Africa-1km	10dmax_linearx2	
						10d linearx2 Median	SPOTV-Africa-1km	10dmed_linearx2	
						10d yearly Minimum	SPOTV-Africa-1km	year_min_linearx2	
						VCI	SPOTV-Africa-1km	vci	
						ICN	SPOTV-Africa-1km	icn	
						VCI linearx2	SPOTV-Africa-1km	vci_linearx2	
						ICN linearx2	SPOTV-Africa-1km	icn_linearx2	
						Monthly NDVI	SPOTV-Africa-1km	monndvi	


Figure 23: Processing view

3.8.1 Functionality

1. Expand all product categories to see all the products with one or more processing chains defined, by clicking on the **Expand All** button and to collapse all product categories by clicking on the **Collapse All** button.


Expand or collapse each product category individually by respectively clicking on categories title bar or on the + and – sign on the left of the title of a product category.


2. Like in the Dashboard, the Processing service can be started, stopped or restarted and its log file can be viewed. By clicking on the arrow next to the title, a menu will drop down with the items Run, Stop, Restart and "View log file".





If the service is running, then the cog icon is green  and red  when the service is not running.


You can refresh the current status of the Processing services by clicking on the title of the service menu button.



3. To refresh/reload the Processing page click on the refresh  button.
4. Activate/deactivate a processing chain.

The  icon means the processing chain for the derived sub products is activated. Click on the icon to deactivate the processing.

The  icon means the processing chain is deactivated. Click on the icon to activate the processing chain.

5. View the log file for an individual processing 'chain', click on the  icon. A new window will be shown with the content of all the log files (.log, .log1, .log2, etc...) of the processing 'chain', in reversed order with the latest date on top.

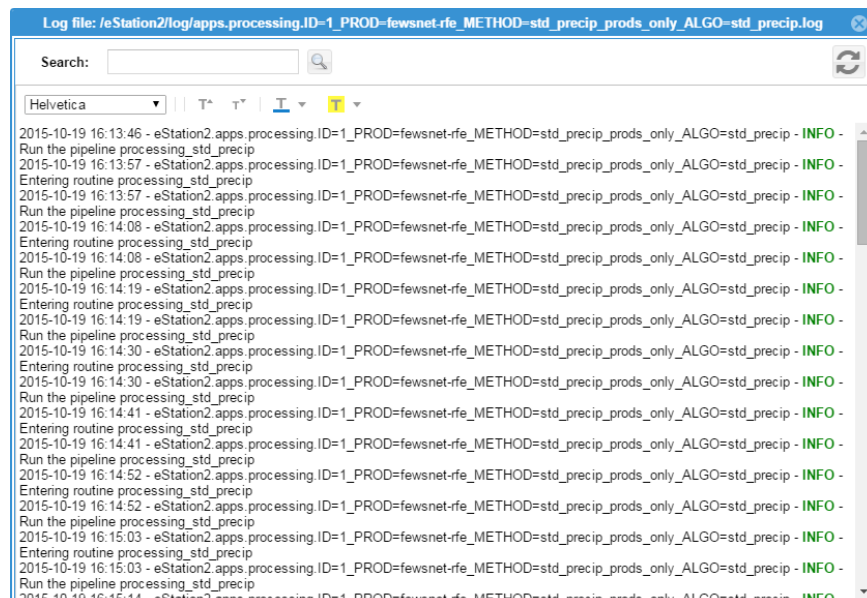


Figure 24: Processing service log file of specific chain

3.9 ANALYSIS

The Analysis tool is the entry point for the Climate Station data visualization and analysis.

It is a user-friendly interface to display any available products:

- as map over space and time with appropriate legend and vector overlay or
- as graphs to visualise the time series data aggregated from any polygon of interest.

The registered user can save any MAP and GRAPH composition as templates. A powerful functionality is the creation of a WORKSPACE where the user can display multiple maps and graphs and save the multiple object combinations as workspace templates and retrieve them at a later stage.

The management of the different objects is made through five components:

- Workspace
- Map
- Graph
- Legend
- Layers

3.9.1 Workspace functionalities


To facilitate the analysis and interpretation of the EO data a new way to organise the different maps and graphs has been introduced through the development of a workspace environment. This work panel can be populated with various existing or new maps and graphs. The user can distribute and resize the different objects as needed and then save this workspace as a template. The user can generate various workspace templates dedicated to any specific thematic and focus on geographic area.

It is recommended to log in to be able to save workspaces, maps, graphs, colour palettes and layers.


3.9.1.1 Workspace interface description

When opening the Analysis page, you will see a blank page of the “DEFAULT WORKSPACE”, with on the top a toolbar.


For a not logged in user:



For a logged in user:



1. When logged in, the top tab bar contains a menu and the two buttons “REF WORKSPACES” and “MY WORKSPACES” and a tab for the “DEFAULT WORKSPACE”.
 - a. The “REF WORKSPACES” button opens a list of Reference Workspaces from which you can choose and check it to be opened within the “DEFAULT WORKSPACE”.
 - b. The “MY WORKSPACES” button opens a list of your saved Workspaces, where you can manage your Workspaces. You can select one or more Workspaces and open them.
 - c. The menu gives access to the Layers, Legends, and Logos administration tools.



- The “Legends” item opens the legend administration window to copy, edit, delete any colour palette and associated annotation attributes.
 - The “Layers” item give access to the layers administration interface to add, delete, display in a menu/submenu, and define the layer to load by default.
 - The “Logos” item opens the logos administration window to add logos and administer the present logos.
2. Below there are the buttons “NEW MAP”, “MY MAPS”, “NEW GRAPH”, “MY GRAPHS” and “Save as”.
 - The “NEW MAP” button opens a Map window from where the user can visualize any available subproducts and make a composite with a specific colour palette, window and map size, vector layer, title, disclaimer, logo, and scale, digitize polygon/line/points and export the composite as PNG file. Any new map window will be by default align to the background layer scale.
 - The “MY MAPS” button opens a list of the different map templates prepared and saved by the user, which you can open in any workspace.
 - The “NEW GRAPH” button opens the interface to display the time series interface to generate various type of graphs showing the aggregated subproducts over a period of interest from any selected polygon/point into the map viewer. The operator can define interactively the subproducts, period, window dimension, colour, scale, font size, title and logo and export the composite as PNG or the resulting aggregated data set as EXCEL file.
 - The “MY GRAPHS” button opens a list of the different graph templates prepared and saved by the user, which you can open in any workspace.
 - The “Save as” button gives the logged in user the possibility to save the “DEFAULT WORKSPACE” under a different name.

3.9.1.2 Adding a map or graph object in a Workspace

When you want to create a new workspace, start by using the “DEFAULT WORKSPACE”.


You can add a new map by selecting “NEW MAP” icon and create your own map window or select an existing template in “MY MAPS”.


You can also add a new graph by clicking on “NEW GRAPH” or add an existing Graph template from “MY GRAPHS” button.

In your workspace, you can add several maps and or graphs considering that the limiting factor is the screen size and resolution.

3.9.1.3 Saving a Workspace

Any change in size, position, content of the different maps and graphs objects can be saved in a Workspace.

Click on the  button and enter the name you want to give to the template then click OK.

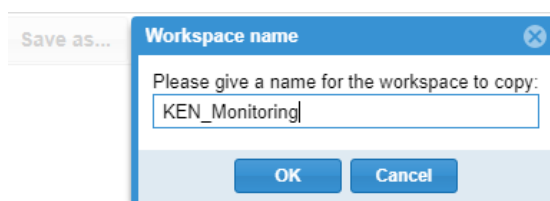


A message “Workspace created!” will be displayed.

When saving the template, you do not update the map and graph templates possibly opened to populate the workspace. They are considered as graphic objects composition specific for each workspace.

You can find and open your saved Workspace under “MY WORKSPACES”.

3.9.1.4 Opening/deleting a Workspace


Each workspace is saved within the specific user session. Any saved workspace can also be retrieved within the same user session at a later stage. Click on “MY WORKSPACES” select the workspace of interest and use the button “Open selected” to open and display the workspace.

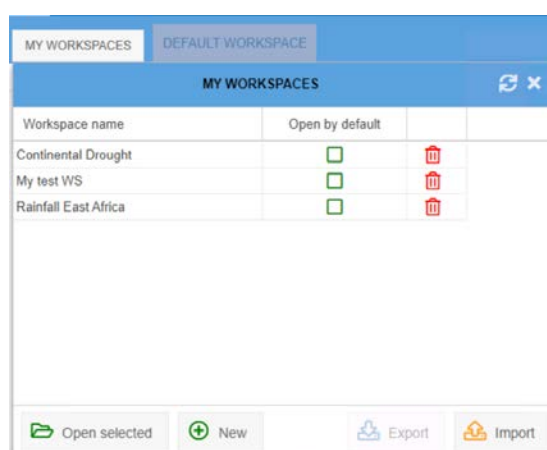

If you want to delete a workspace, you must click on the corresponding red bin icon.


You can also export selected workspaces, downloaded in a .json file, which then can be imported on the same or on another Climate Station, under a different user.

Two workspaces examples:

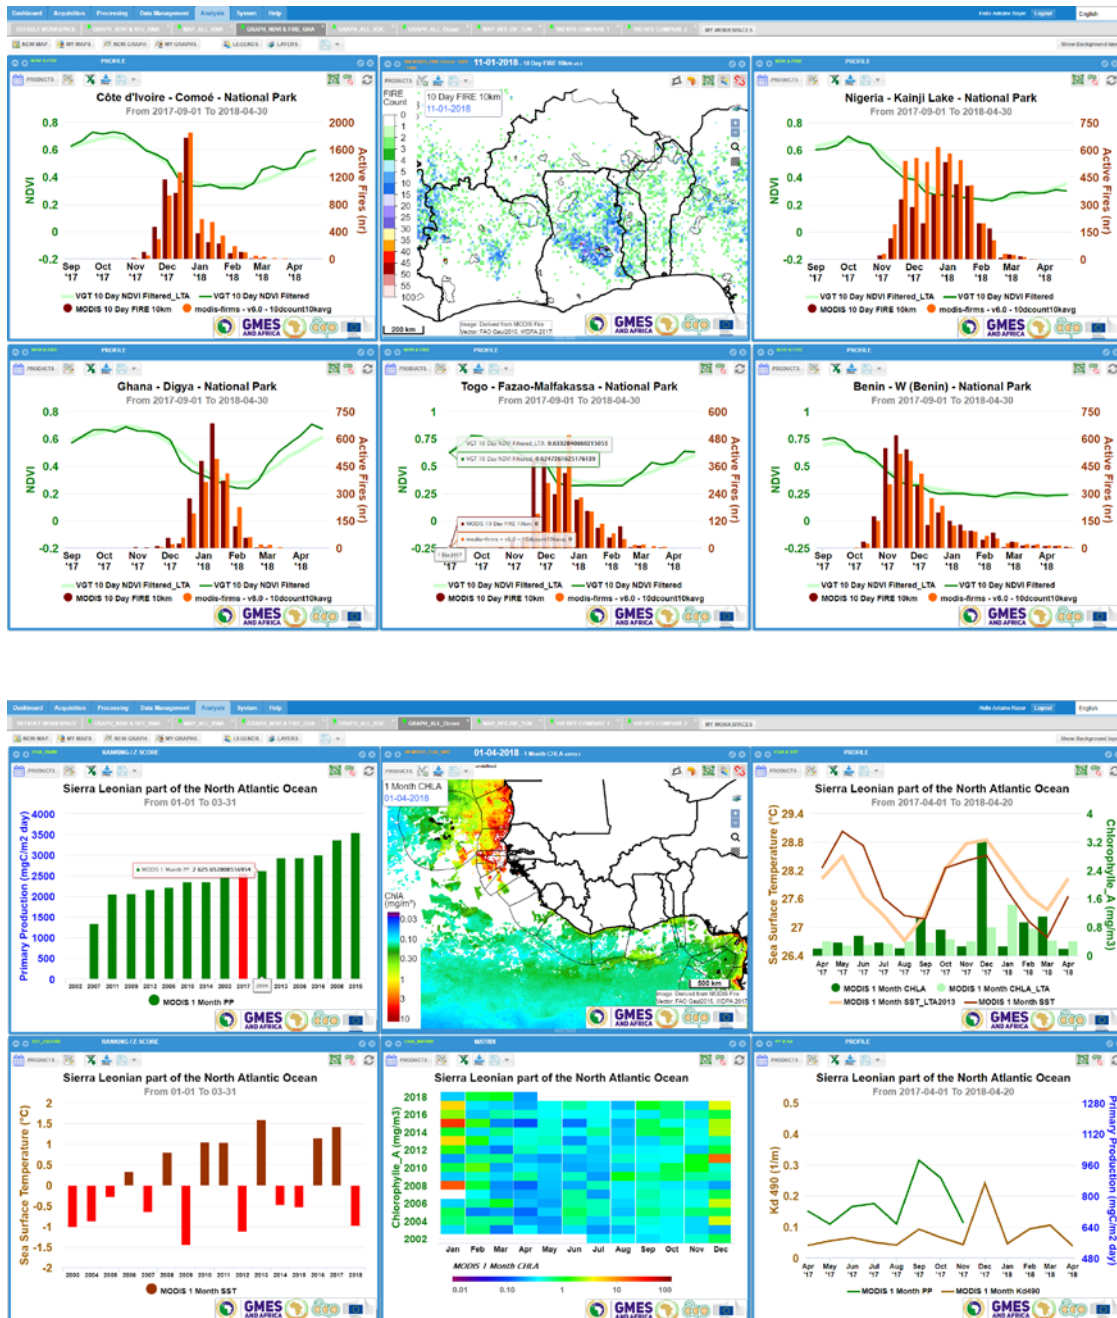

3.9.1.5 Pin/Unpin a Workspace template

You can pin (in GREEN) or unpin (in RED) a workspace template by double-clicking on the pin icon of a loaded workspace (see below). Any pinned workspace (with a GREEN pin) will be loaded when logged in with the same user session.




You can select any workspace to display its content. The graphs and maps in a workspace will be updated with the latest data when opening the workspace.

By double clicking on the workspace tab name, you can edit the workspace name which is saved automatically.

3.9.2 Mapview functionality


3.9.2.1 Viewing a product in a Mapview

Open a new Mapview window by clicking on the “NEW MAP” button. A new empty Mapview window will be opened.

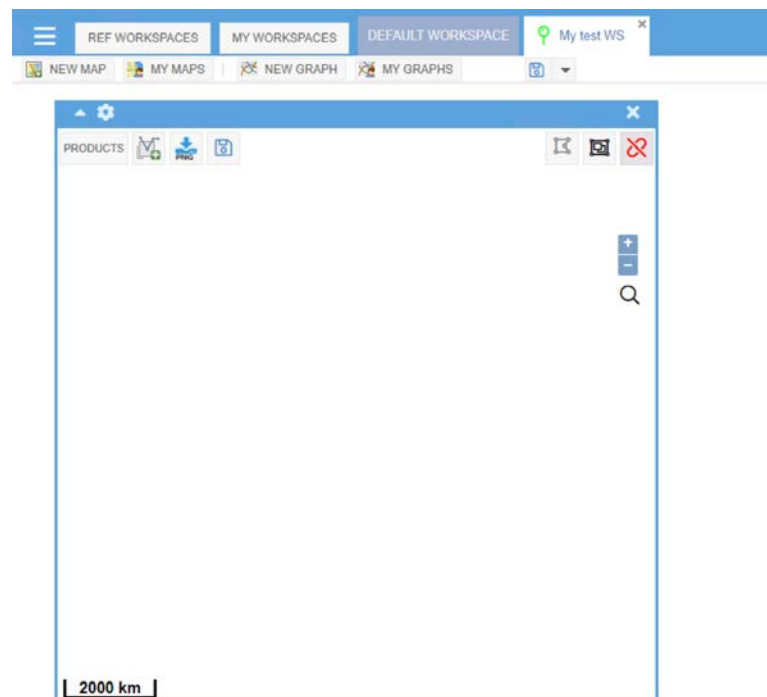

To view a Product in a Mapview a product has to be chosen from the Product Navigator.

From each Mapview the Product Navigator can be invoked by clicking on the “PRODUCTS” button in the Mapview.

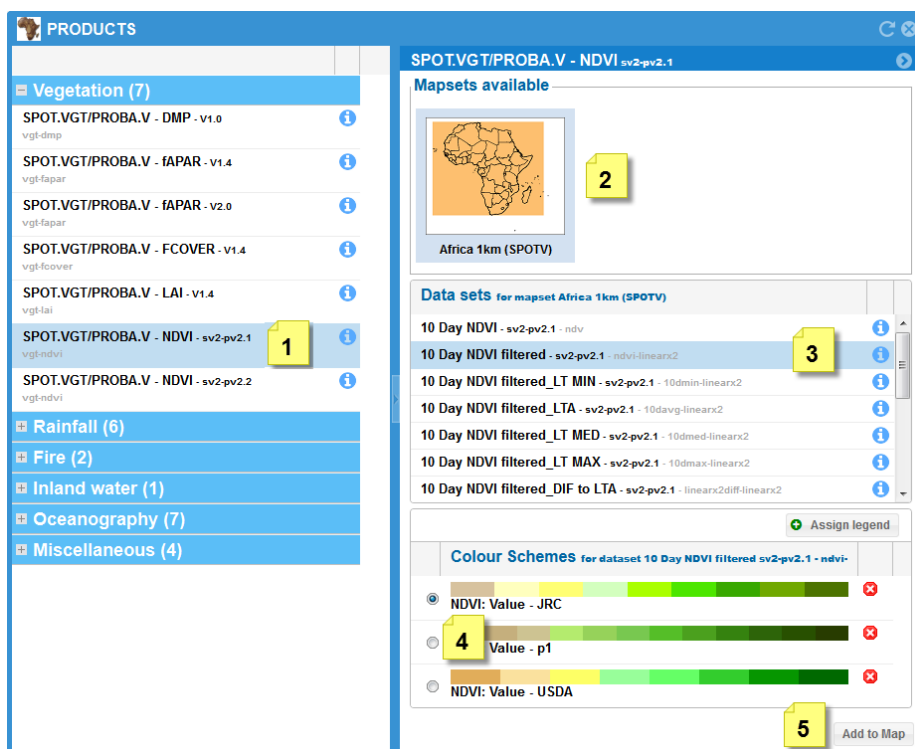

A product navigator window will be opened showing the list of available products for each category (1). Click on the product you are interested in.

On the right of the available products list, the available Mapsets for the chosen product are shown (2).

Select a Mapset and you will see the list of available sub products (3).


Click on the sub product you are interested in to see its defined colour schemes (4) with the default colour scheme selected.

Choose the colour scheme you prefer and finally click on the “Add to map” button.

Steps to follow:

1. Select a product
2. Select a mapset
3. Select one of the available sub products
4. Chose a colour scheme (legend)
5. Click on the “Add to map” button

The Product navigator will close, and the last available date of the selected product dataset will be shown in the Mapview window with the legend colour scheme and on the bottom of the Mapview its available timeline.

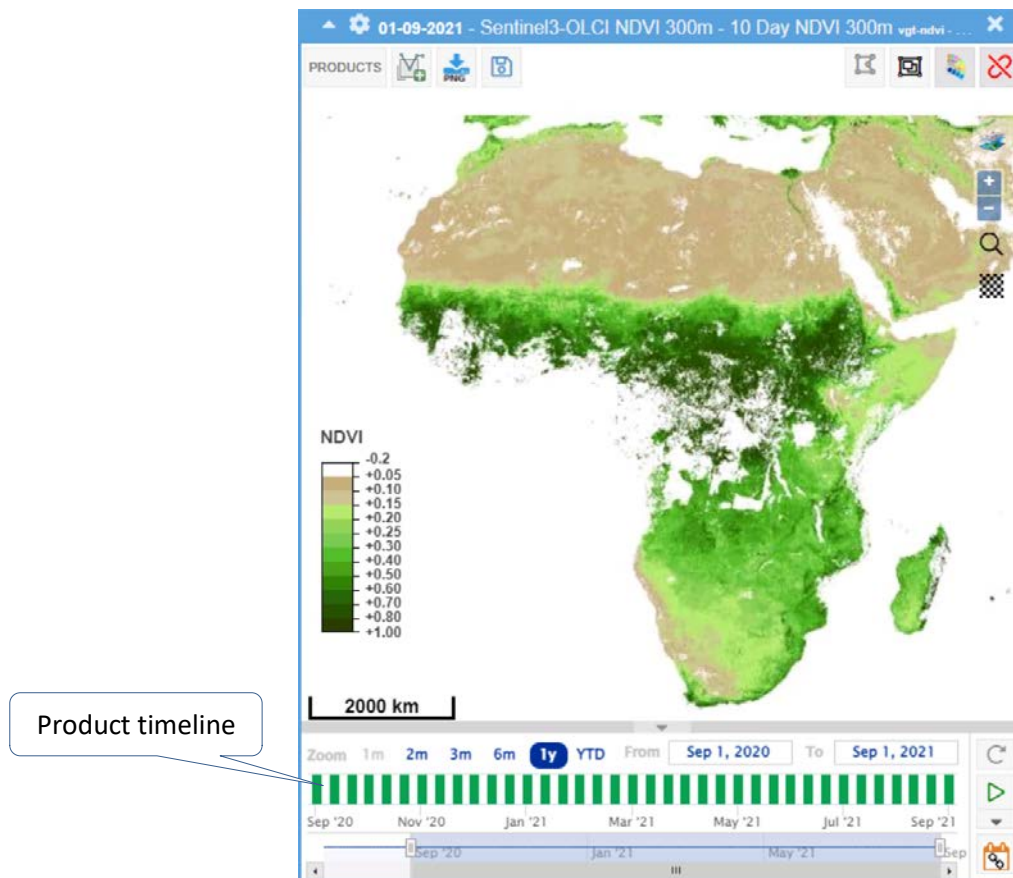

3.9.2.2 Product timeline

When a product has been added to a Mapview, the timeline of the (sub) product is shown on the bottom of the Mapview. All the possible dates within the products frequency are visualized chronologically as small, coloured bars.


- A **green bar** for every date physically present in the file system.
- A **red bar** for every date missing.
- A **grey bar** for every date permanently missing.

3.9.2.2.1 Viewing a sub product's date in the map area of a Mapview

Only the present dates with the **green bar** are clickable. When clicked, the map for the clicked date of the in the Product navigator selected (sub) product, will be rendered in the Mapview.

In the title bar of the Mapview the current date is shown.


Date in title bar

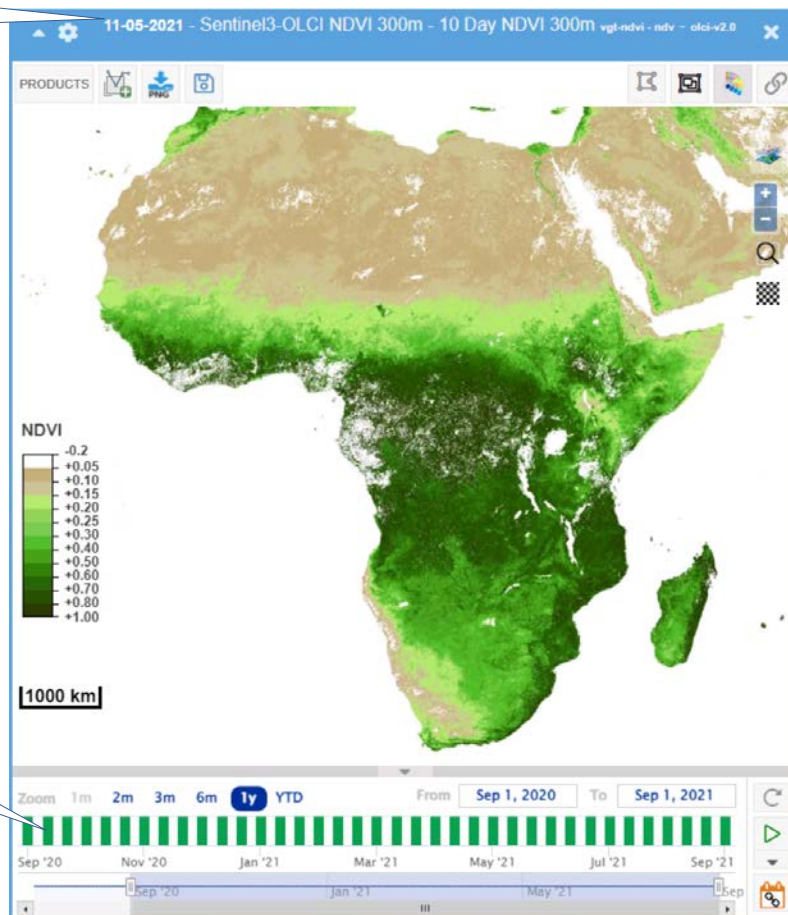


3.9.2.2.2 Navigating through the timeline


Navigating through the timeline is mainly done using the slider on the bottom, which can be moved from right to left and vice versa and also made smaller or larger, to zoom in or out in the timeline.

Zooming can also be done through the 1m, 2m, 3m, 6m, 1y and YTD buttons in the left upper corner of the timeline or through the From/To fields in the upper right corner of the timeline. YTD will show the last available year. 1y will show the whole year that you currently are in on the timeline. The default zoom button depends on the product's frequency. For example, for a daily product, the 2m button is the default.

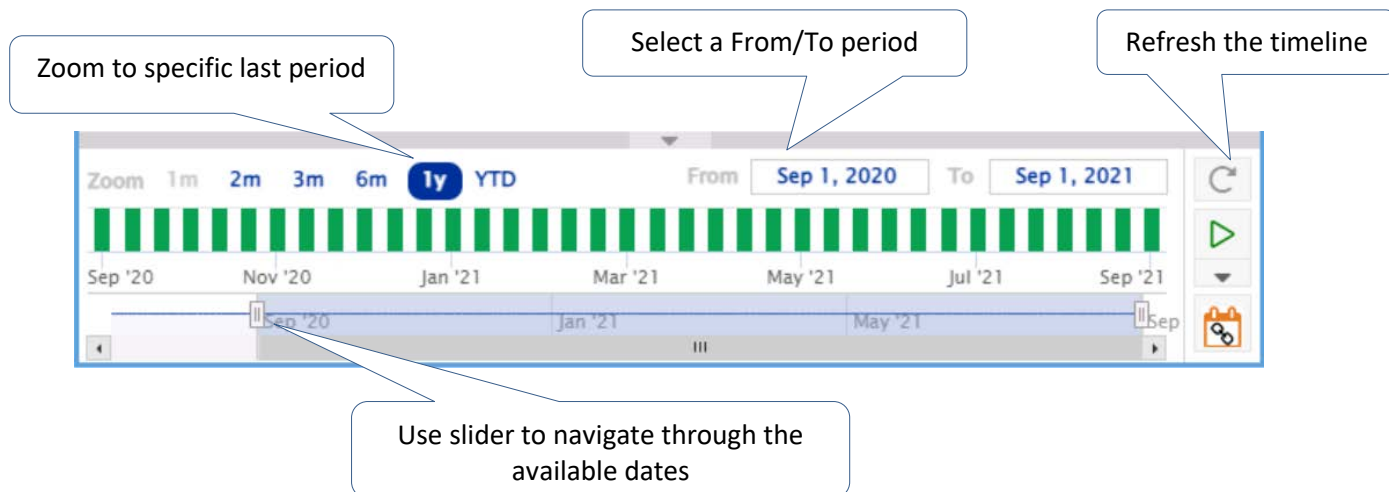


3.9.2.2.3 “Video” play the visible timeline of a Mapview

Showing all the dates visible in the timeline, like a video, can be done by clicking on the play icon . When clicked, the first date visible in the timeline of the sub product will be displayed in the Mapview. After the default interval of 3 seconds (3000 ms), the next date in the timeline will be displayed, etcetera, until the last visible date in the timeline, and then starts again with the first visible date.



When playing the visible timeline, the play icon changes into a stop icon . Click the stop icon to stop playing the timeline.

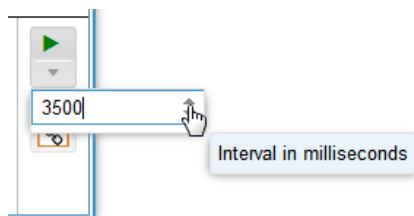The interval can be changed by clicking on the small down arrow below the play icon. Using the small arrows will add or diminish 500 milliseconds to the interval.



3.9.2.2.4 Link or unlink the timeline of multiple Mapviews



Clicking on the green bar of a date in the timeline will show the clicked date of the sub product in its Mapview, but also in all other open Mapviews. By default, all open Mapviews are “timeline linked”. The same clicked date or the nearest available date of the sub product in other Mapviews will be taken.

Unlink a Mapview’s timeline by clicking on the timeline link button . The icon will change into the red icon with an unlinked chain , meaning that the timeline of the Mapview is unlinked.

When you “play” the timeline of a Mapview, also all open and timeline linked Mapviews are “Played”.


3.9.2.3 Link/unlink Mapview window from background layer

All Mapview windows are by default linked to the background layer (which is hidden).


Maps are linked means that when zooming or panning within a Mapview or the background layer, all the linked Mapview windows will equally zoom or pan. This default behaviour you can **turn ON or OFF** for each Mapview by clicking respectively on the un-link  or link  toggle button.

3.9.2.4 Legend colour scheme

When a product is added to a Mapview, the legend of the chosen colour scheme is shown within the Mapview in vertical layout.

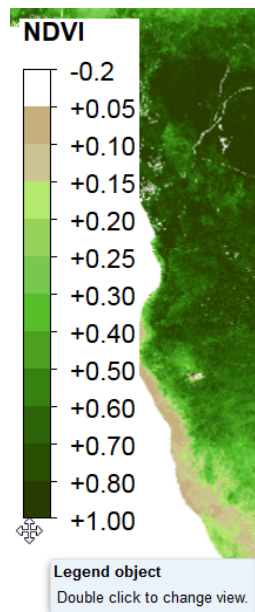


To view the legend in horizontal layout, double-click on the legend. Toggle between horizontal and vertical view of the legend by double-clicking on the legend.

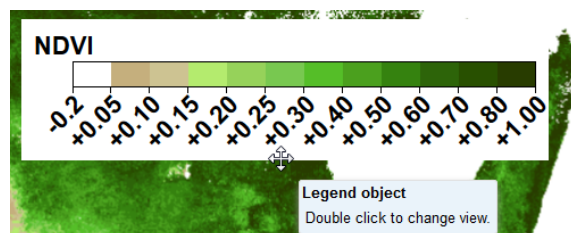

To hide or show the legend, click the toggle button  in the "Mapview" toolbar.

Moving the legend frame within the Mapview can be done when you click, hold and drag the legend.


3.9.2.5 Navigation: zoom in/out and panning


The zoom tool  gives the possibility to zoom in (+) or out (-).

The fastest way to zoom in or out is by using the mouse scroll wheel. Click within a Mapview and then use the scroll wheel on the mouse.


Panning is also done using the mouse. Click and hold the mouse button within a Mapview and then move the mouse to pan the map.


3.9.2.6 Zoom factor

The zoom factor slider is shown by clicking on the icon , found in the right corner of the map area of a Mapview window. Use the slider to change the zoom factor. Values go from 1 to 10, with value 1 meaning slow/smooth zooming and value 10 fast zooming. The default is 5. Changing the zoom factor in one Mapview will change the zoom factor also in all the other linked Mapviews.




3.9.2.7 Opacity slider

The opacity slider is shown by clicking on the opacity icon , found in the right corner of the map area of a Mapview window with a sub product. Use the slider to change the opacity of the product layer in steps of 10%.

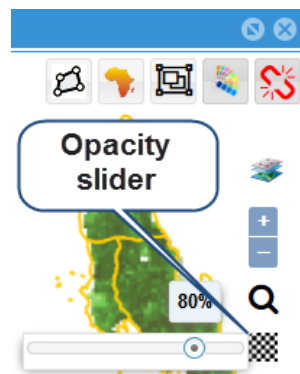


3.9.2.8 Show/hide tool bar


To create more space in the map area of a Mapview, you can hide the tool bar with the tool buttons by clicking on the  icon in the left corner of the header.




3.9.2.9 Collapse or expand a Mapview window

Because you can open many Mapview windows, it is good to be able to collapse Mapview windows and see only its header. Handy for organizing better the opened Mapview windows.


Click on the  icon in the left corner of the header to collapse a Mapview window.




Move the header by clicking on it and hold the mouse button to be able to drag the collapsed Mapview window around the Analysis page in the browser. You can do this also when the Mapview window is expanded.

To expand a Mapview window, click again on the  icon.


3.9.2.10 Add vector layer

In the tool bar of a Mapview, the layer menu button  shows, when clicking on it, a menu of all the active vector layers included in the Climate Station. Vector layers can be activated/de-activated through the Layer administration.

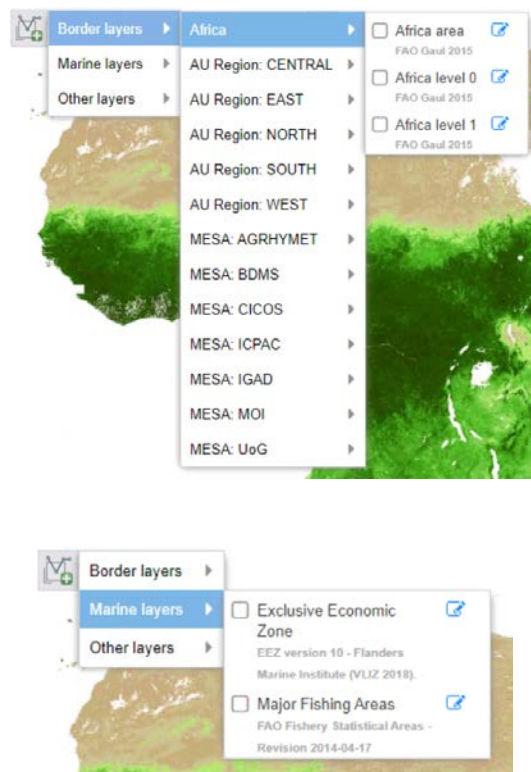

Supplied vector layers are Gaul 2015-2014 Border layers, Marine layers (Fishing Areas and EEZ) and Other layers like Protected Areas.

Select a vector layer's checkbox from the menu to add the layer to the map area of the Mapview. De-select a vector layer's checkbox from the menu to remove the layer from the map area.

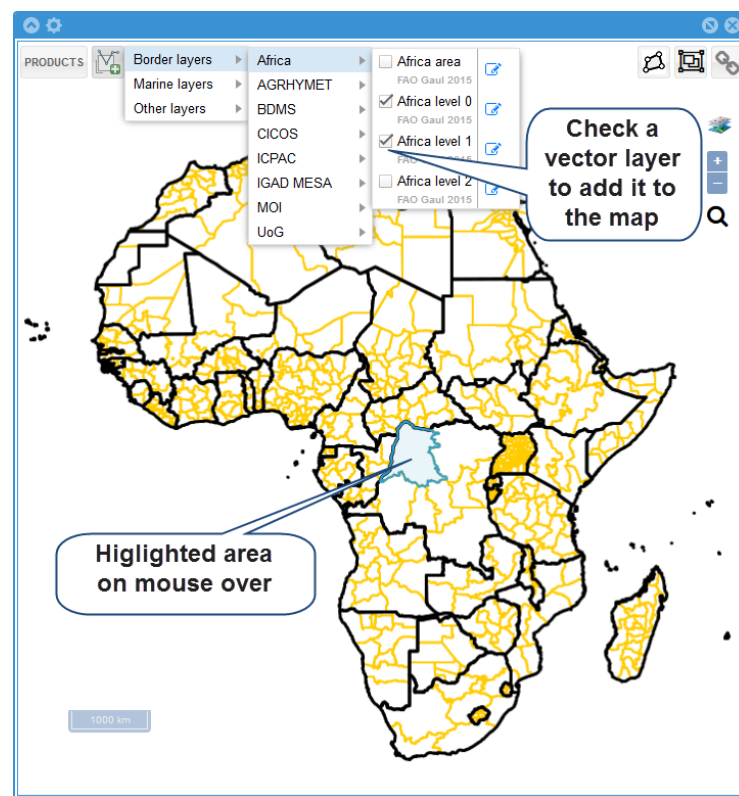

All polygons (area geometries) are interactive. Going over a polygon (or multi polygon) of an area, will highlight the area and will show the area name in the tool bar. Clicking on an area will select the area and the geometry of the area becomes **red** (the default is red for the selected feature outline colour but can be changed). Also, the name of the selected area will be shown in the Time series tool under "Selected region". The time series tool is only working if an area has been selected.




When more than one vector layer has been added, priority is given to the layers for selecting an area with the highest priority (lowest priority number in the vector menu). Protected Areas have the highest priority, then level 2, then level 1, then level 0 and finally level 00. This means that when you have all 4 levels added, you will have to hide layers with higher priority to be able to select areas within a lower priority layer.



- Make level 0 areas selectable then hide the Protected areas layer and all level 1 and level 2 layers.
- Make level 1 regions selectable then hide the Protected areas layer and all level 2 layers.

Hide layers though the Layer switcher.

Double clicking on a polygon/feature will zoom to its extent.


3.9.2.11 Edit layer draw properties from menu


The draw properties of each vector layer can be edited individually through the layer menu by clicking on the  icon next to the layer in the menu, which invokes the Edit layer draw properties tool.

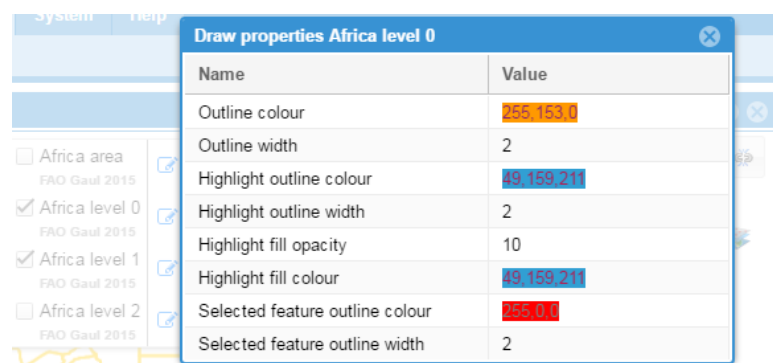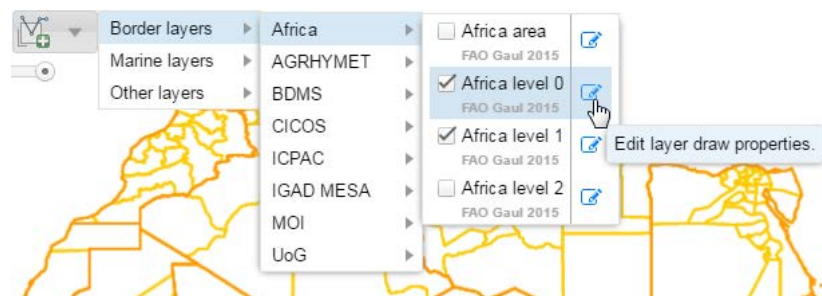

The changes will not directly apply to the layer if it has already been added to the Mapview. If so, remove the layer from the Mapview and then add the layer again to see the changes made to the layer's draw properties.

3.9.2.12 Layer switcher


Vector layers added to a Mapview can be hidden through the Layer switcher , present in the top right corner of the map area. Clicking on the Layer switcher will show a list of all the layers added. The product layer (if present) is the base layer and cannot be hidden.

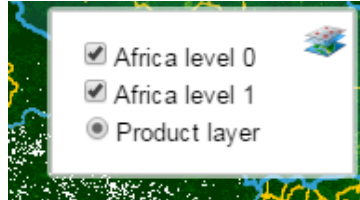


Click on the checkbox next to a vector layer to hide or show the layer.

3.9.2.13 Draw geometries

3.9.2.13.1 Activating draw mode


Every Mapview has the draw geometry functionality. Clicking on the button , will show a menu and put the map area in draw mode.






From the menu you can select the geometry type you want to draw, save the drawn geometries as a layer and reset the draw layer by removing all the drawn geometries.

Geometry types are:

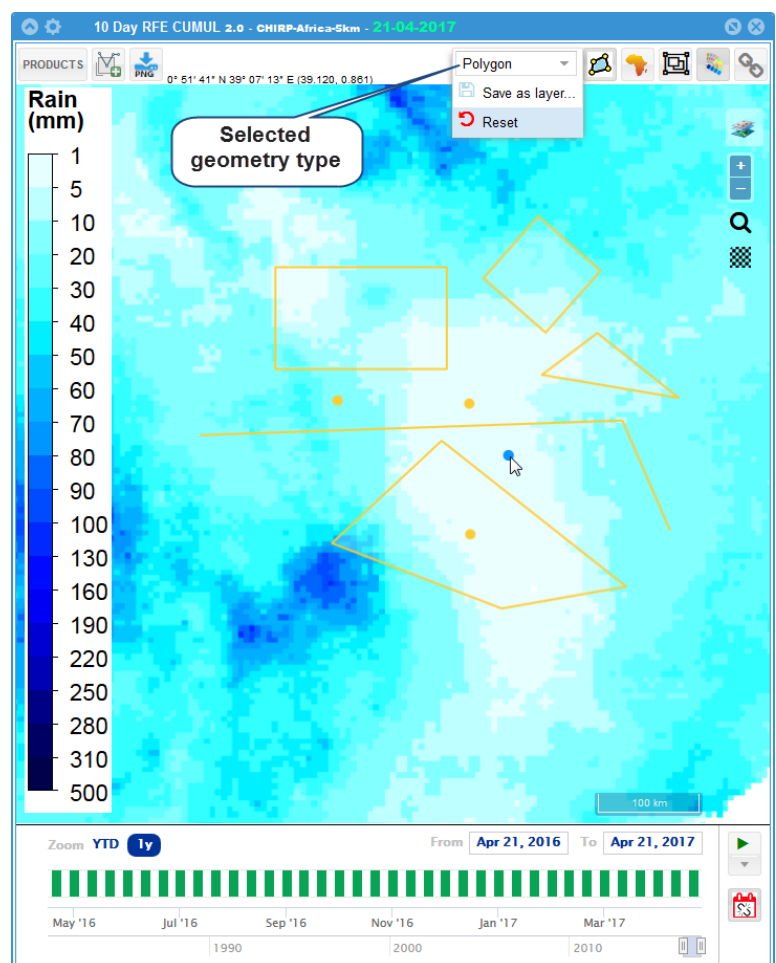- Polygon
- LineString
- Point
- Square
- Box




The map area is in draw mode when you see a light blue dot following the cursor  and the draw geometry button looks like this .

Turn off drawing mode by clicking on the  button.


3.9.2.13.2 Drawing geometries

In draw mode click somewhere in the map area to start drawing the selected geometry type from the menu. Depending on the geometry type, click or double click in the map area to finish the drawing of the geometry in question.

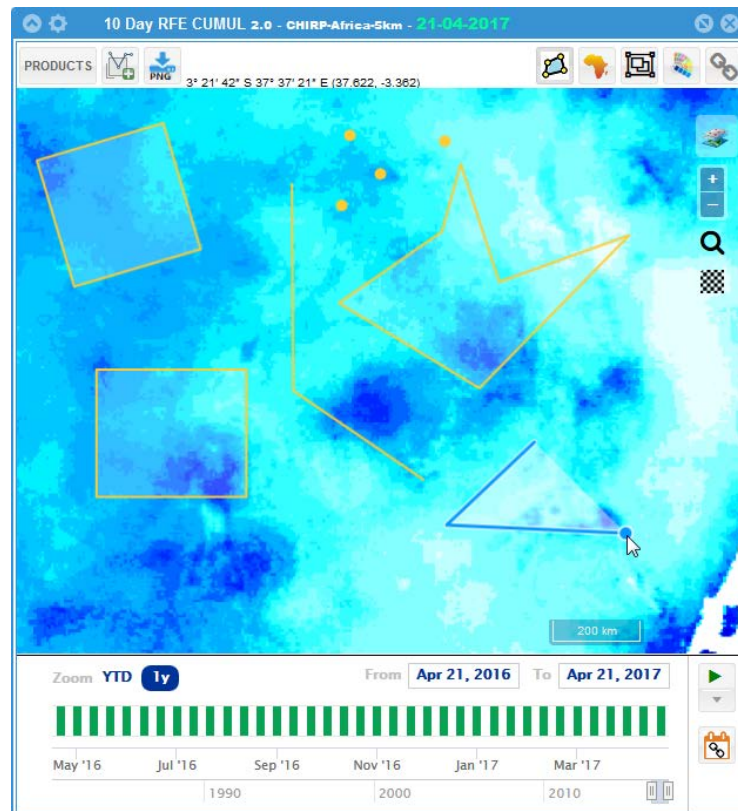


3.9.2.13.3 Deleting a drawn geometry

You can delete a drawn geometry by turning off drawing mode and select the geometry to be deleted. Once selected, hit the "Delete" key on your keyboard to delete the geometry.

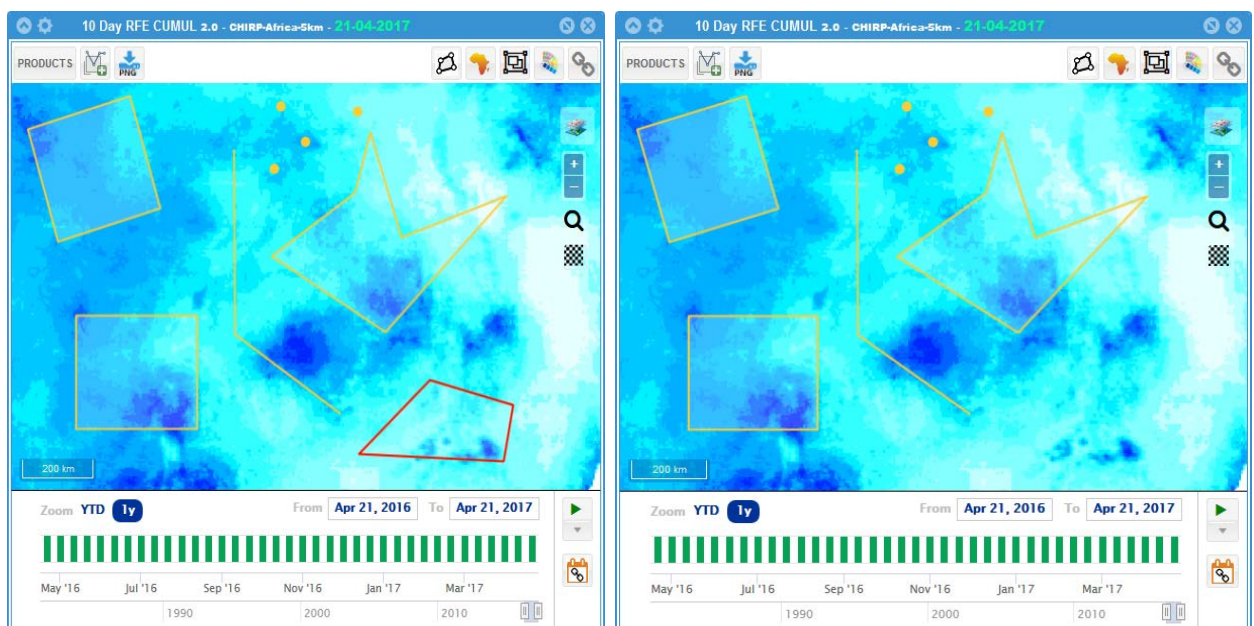

3.9.2.13.4 Save drawn geometries as a layer

Selecting “Save as layer...” from the menu will show a dialog asking to give a name to the layer.

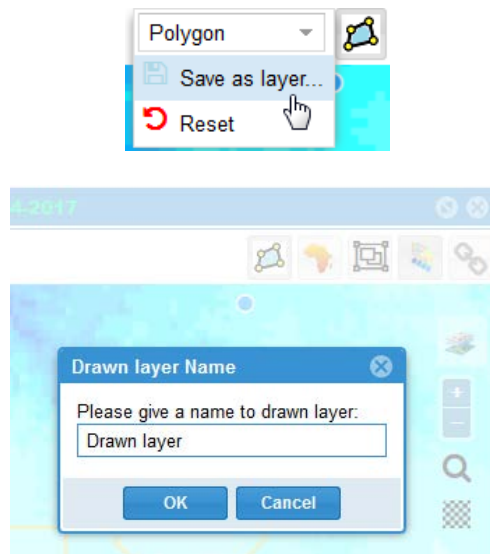



Give a suitable name for your layer and click on OK.

All the drawn geometries are saved in a file in geojson format and added as a user layer on the Climate Station with default settings. The saved layer is also opened, directly in the Mapview.

To share your drawn layer, the file is also downloaded to the download directory of your browser.


To change the default settings of the layer, go to the Layer administration.

3.9.2.14 Out masking a product

When a product and one or more vector layers have been added to a Mapview, the Out-mask toggle button  appears in the Mapview tool bar. When clicked, the toggle button becomes darker grey , which means that Out masking is turned on.



Selecting the feature/geometry of a region in the Mapview will now out mask the selected region.


Turn off Out masking by clicking again on the toggle button.

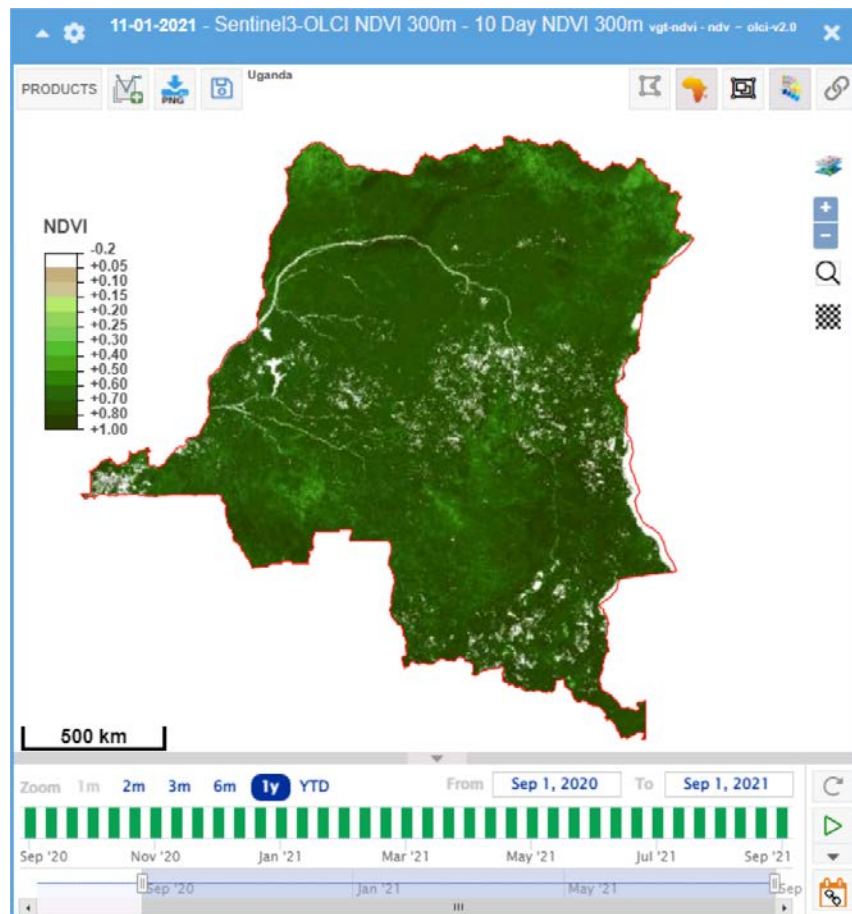

3.9.2.15 Title, logo and disclaimer objects

There are three objects you can show and hide in the map area, the Title, Logo and Disclaimer objects.

To show the objects, click on the  button. The button becomes green  and the three objects are shown in the map area.

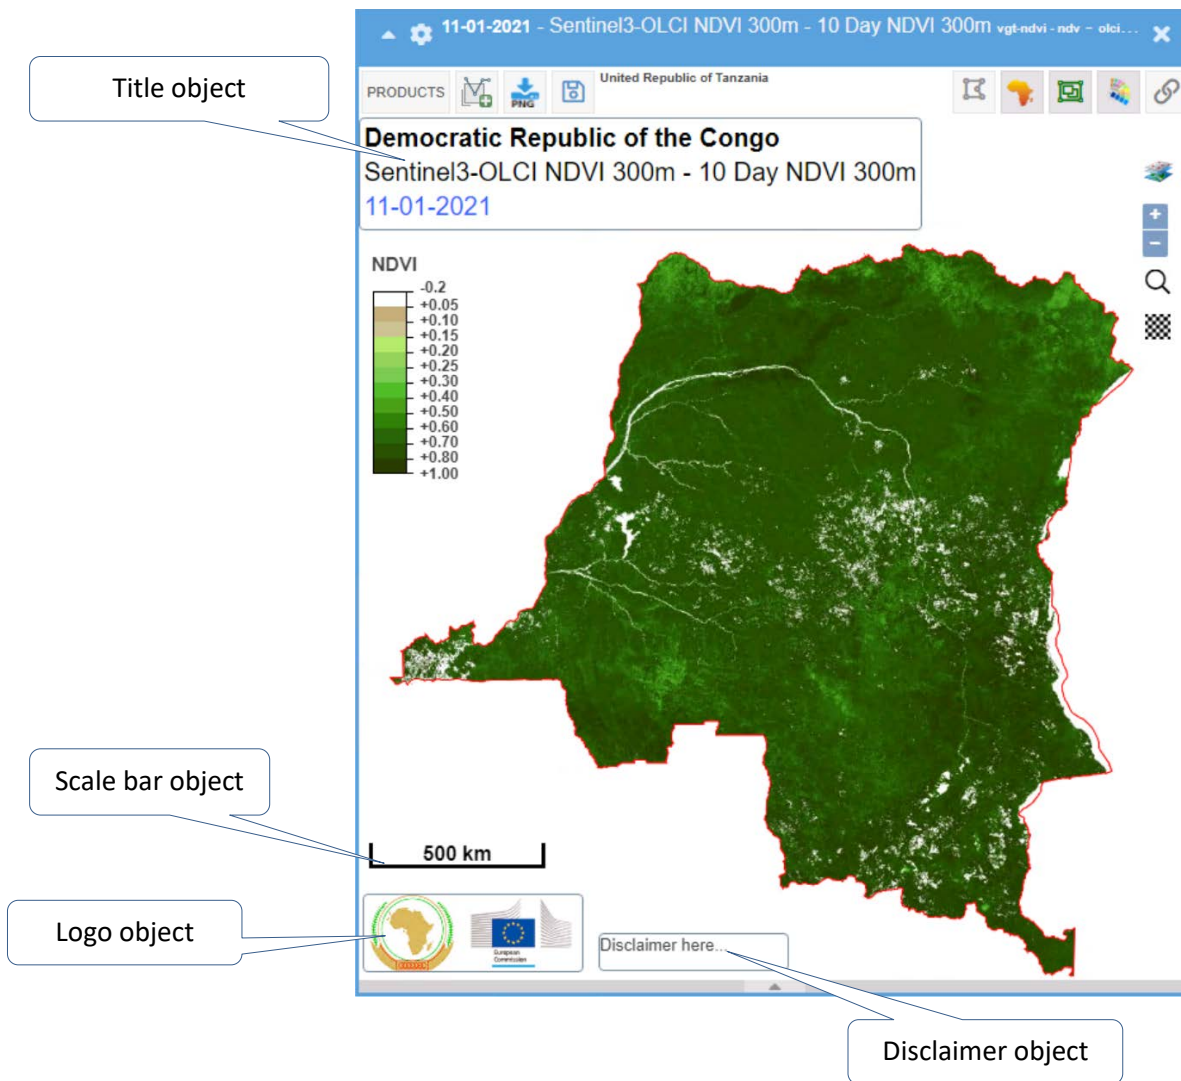

You can move and reposition all three objects by click and hold on an object and drag the object to reposition it. Also, the scale object is repositionable.

3.9.2.15.1 Edit Title object

Double-click the Title object to edit it. The title editor is shown whereby default the 3 dynamic fields are added. You can type any text around the dynamic fields or delete the dynamic fields if they are not desired. Format the text (and dynamic fields) using the available text formatting tools in the editor.





Dynamic fields are fields that are automatically filled in when used. There are 3 fields:


{selected_area} – The name of the selected area/geometry of a layer in the Mapview.

{product_name} – The name of the sub product shown in the Mapview.


{product_date} – The date of the sub product shown in the Mapview.

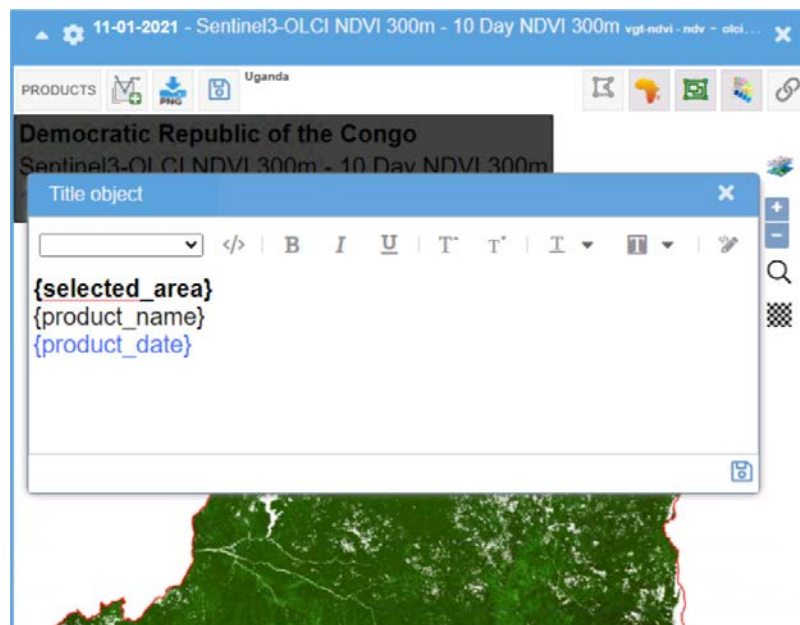


When you have deleted dynamic fields, you can add them by typing exactly the field names in brackets as shown above or by using the dynamic field selection tool  in the editor's toolbar.

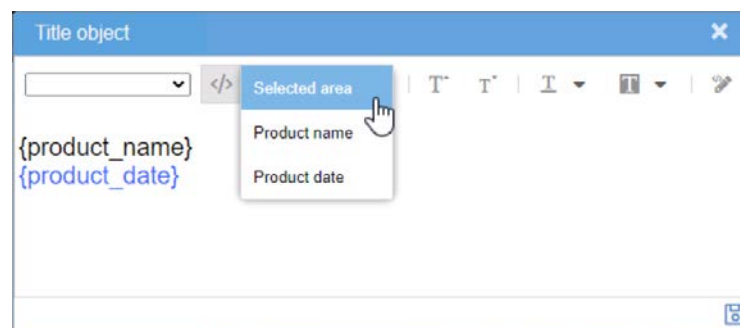

- To save your changes, click on the save button found in the header of the editor.

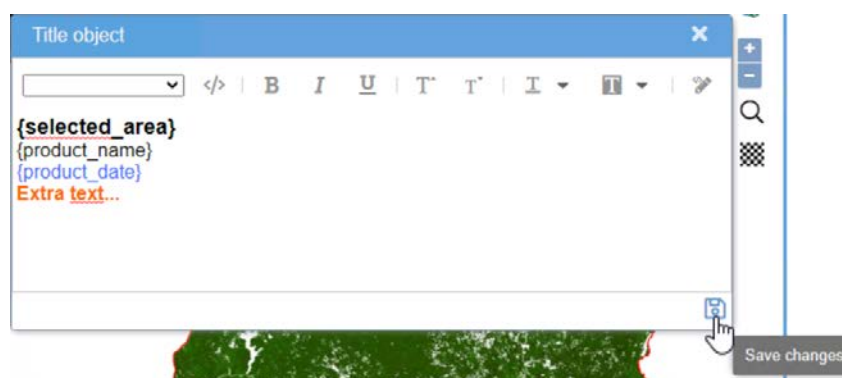

- The editor will close, and the changes reflect in the title object of the Mapview.

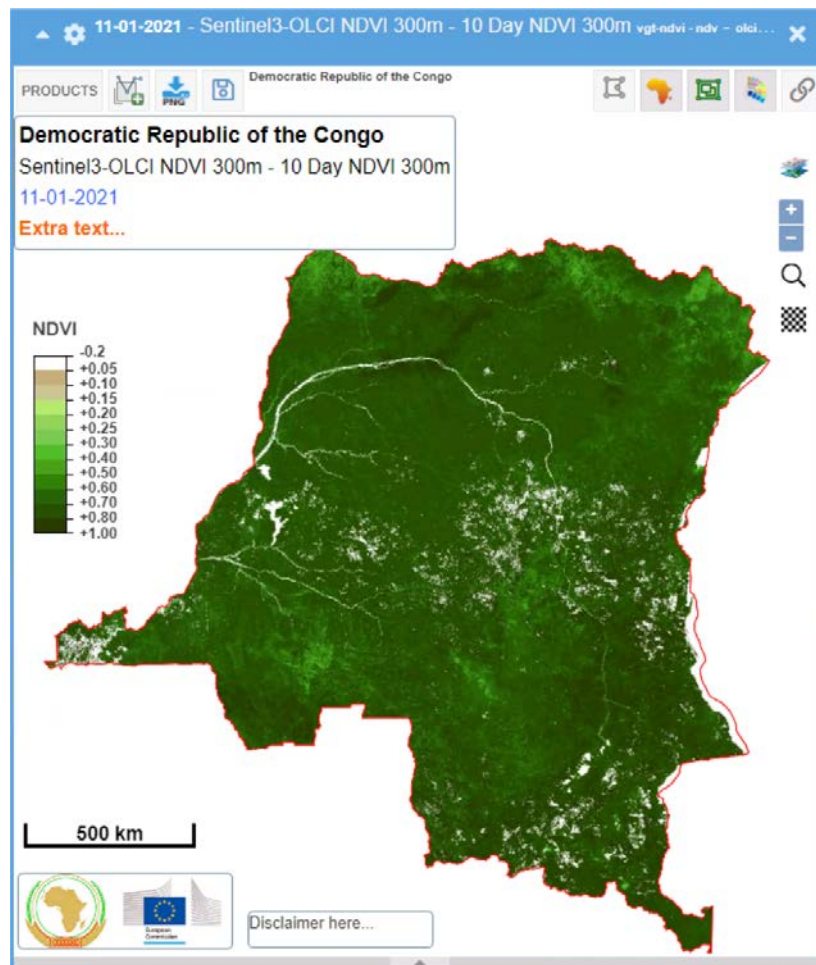


3.9.2.15.2 Edit Disclaimer object

Double-click the **Disclaimer** object to edit it. The disclaimer editor is shown. You can type any text and format the text using the available text formatting tools in the editor.

- To save your changes, click on the save button found in the header of the editor.



- The editor will close, and the changes reflect in the disclaimer object of the Mapview.

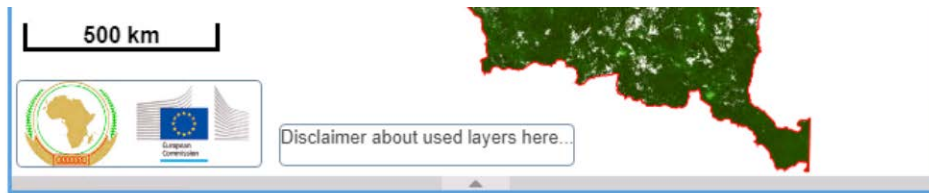


3.9.2.15.3 Edit Logo object


Double-click the Logo object to edit it. The logo editor is shown.

The upper box contains the selected logo's that will appear in the logo object. The lower box contains the available logos.

- Double-click on a logo in the selected logo's box to remove the logo.
- Double-click on a logo in the available logo's box to add the logo to the selected box.
- To save your changes, click on the save button found in the header of the editor.

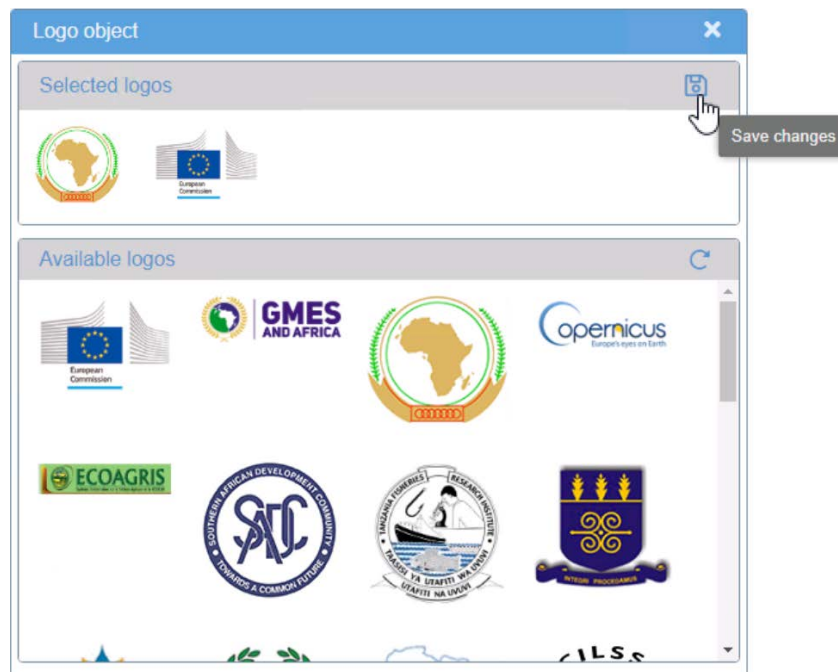

3.9.2.16 Save map as PNG image

To save a map rendered in a Mapview click on the  button present in the tool bar in the top of the Mapview. A snapshot of the all the visible layers in the map, the product legend (as shown in the map) and the title, disclaimer and logo objects will be made in PNG format and automatically downloaded in the download directory of the browser.


3.9.2.17 Map templates

3.9.2.17.1 Save Mapview as template

A map template is a by the user prepared Mapview saved in the database with a given name. A saved map template can be reopened exactly as the user prepared the Mapview (currently the saving of the opened vector layers).

To save a prepared Mapview as a map template, the user must first login.

When logged in you will see a “MY MAPS” button in the toolbar of the Analysis tool.



Also, you will see a “Save” button in each Mapview you open.




What will be saved in the map template?

- Mapview window size and position in the Analysis tool.
- Sub product added to the Mapview.
- Legend id.
- Legend visible or not.
- Legend position in the Mapview.
- Legend orientation (vertical or horizontal).
- Title object, Logo object and Disclaimer object visible or not.
- Title object, Logo object and Disclaimer object content and position in the Mapview.
- Scale bar object position in the Mapview.
- Vector layers opened in the Mapview.
- Zoom extent.
- The selected geometry.
- Out mask on or off.

When you have prepared a Mapview, save it as a map template by clicking on the “Save” button. You will be asked to give the map template a name. If a product is opened in the Mapview, the product name and version is proposed as the map template name.

Give the map template a suitable name and click on Ok.

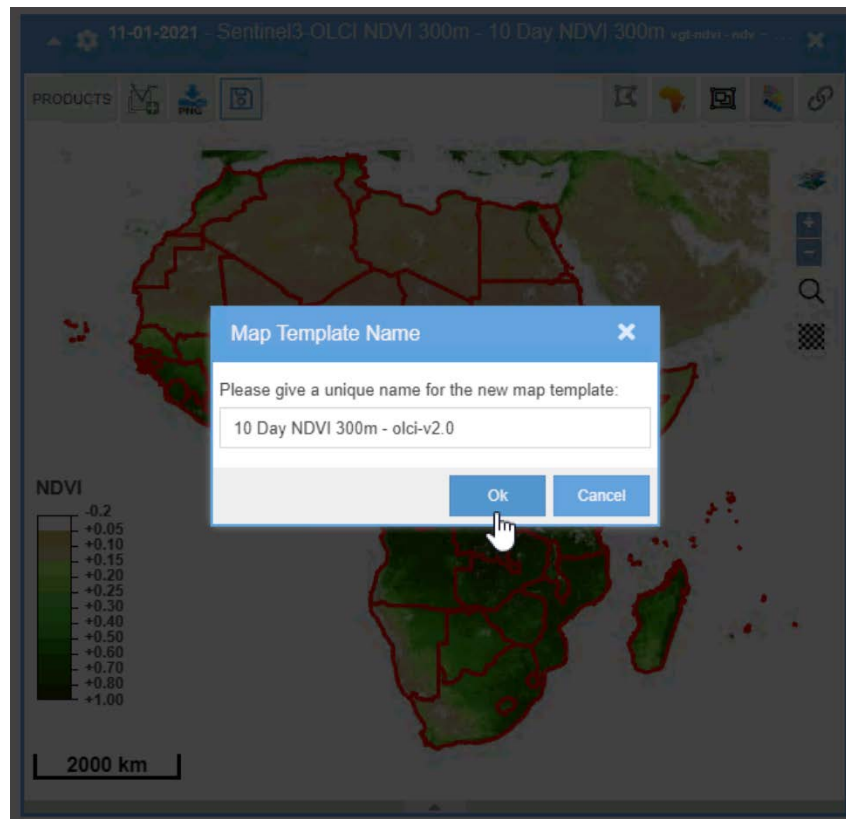

The name given will appear in **orange** in the header of the Mapview, indicating that the Mapview is a map template.



Click on the “Save button to save any changes made to the map template.


Save a map template under another name by choosing “Save as...” under the “Save” button.



3.9.2.17.2 Open a map template


Click on the “MY MAPS” button in the toolbar of the Analysis tool. The list of all the user’s map templates will appear next to the button.

Select one or more (using the Ctrl key) map templates and click on “Open selected”.

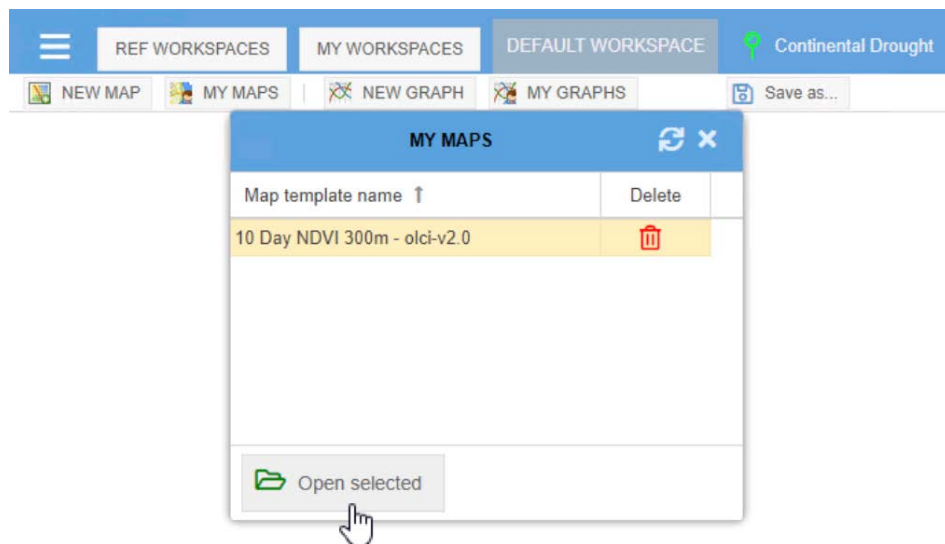

The selected map template(s) will be opened exactly the way it was saved.

Delete a map template by clicking on the  icon next to the name of the map template.

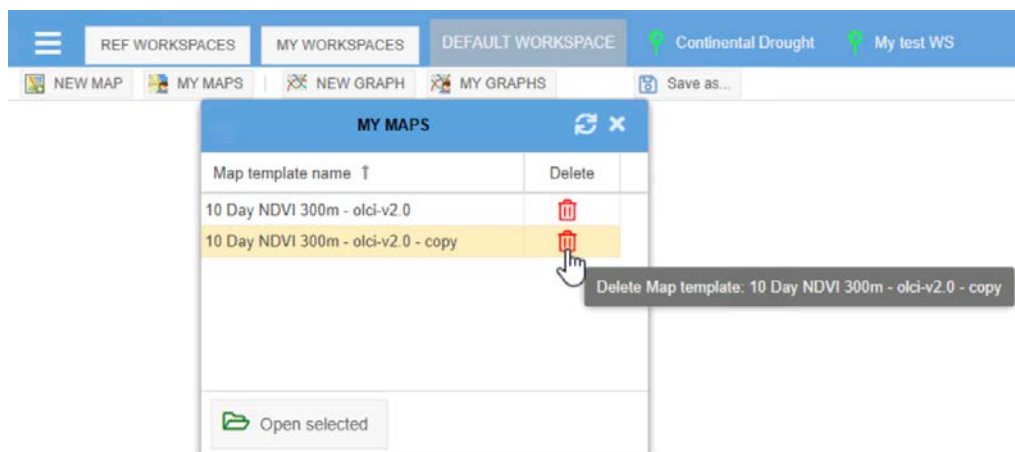


3.9.3 Legends administration

The Legends administration tool is available to:

- View predefined legend definitions.
- Create a new legend.
- Copy a legend.
- Edit a user defined legend definition.

Open the Legends administration window by clicking on the menu on the top left corner of the Analysis page.



A full list is presented of the legends defined on the Climate Station, of which most are supplied by the JRC.

Legend Administration				
<div>New legend Copy legend</div>				
	Descriptive name	Colour scheme	Min value	Max value
👁	2M Temperature	Temperature	270	400
👁	2MT TEMPERATURE	2MT TEMPERATURE Kelvin	273	373
👁	Anomaly: Difference	Anomaly Dif (mm)	-10	10
✎	Anomaly: Difference - copy	Anomaly Dif (mm)	-10	10
👁	ASCAT soil water index	Soil water index	0	100
👁	Burnt Area	FIRE Burnt Area	0	2
👁	Chl-a horizontal gradient - 36 steps	Chl A Gradient (mg/m ² /km)	0	100
👁	Chl-a horizontal gradient Value - 126 steps, 0 to 10	Chl-a gradient (mg/m ² /km)	0	10
👁	CHLA Anomaly: Difference	ChlA Dif (mg/m ²)	-10	10
👁	CHLA Anomaly: Difference - 128 steps, -1 to 1	ChlA Dif (mg/m ²)	-10	10
👁	CHLA Value - 36 steps, 0 to 10	ChlA (mg/m ²)	0	100
👁	CHLA Value - 63 steps, 0 to 10	ChlA (mg/m ²)	0	100

3.9.3.1 View JRC defined legend definitions

Legends defined by the JRC cannot be changed or deleted. You see an eye icon in front of JRC defined legends. To view a legend defined by the JRC, double click on the legend or click on the eye icon.

The legend definition window is opened in view mode.

The 'View legend' window is divided into four main sections:

- Legend settings:** Contains fields for 'Legend descriptive name' (RFE Value over 1 day - TAMSAT/JRC), 'Title in legend' (RAIN (mm)), 'Min value' (0), and 'Max value' (250).
- Assigned Subproduct:** Lists subproducts assigned to the legend, including '1 Day RFE' and 'CDAS month Precip'.
- Legend classes:** A table with columns: Colour, From, To, Class label, and Last label. It shows 10 classes with color swatches and numerical ranges.
- Preview:** A vertical color scale for 'RAIN (mm)' ranging from 0 to 30+ mm, with corresponding color swatches.

	Colour	From	To	Class label	Last label
1	255 255 255	0	1	0	
2	255 170 0	1	2	1	
3	230 230 0	2	4	2	
4	255 255 156	4	6	4	
5	85 255 0	6	8	6	
6	85 108 0	8	10	8	
7	0 195 255	10	15	10	
8	0 92 230	15	20	15	
9	100 0 200	20	30	20	
10	75 0 156	30	250	30	>>

A legend definition contains 4 sections:

1. Legend settings
2. Legend classes
3. Preview – the preview of the vertical legend definition
4. Assigned sub products – the list of sub products to whom the legend is assigned.


Legend settings


	Description
Descriptive name	The descriptive name of the legend.
Title in legend	The title of the legend, which appears above the legend.
Min value	The min value, which is the “From” value of the first legend class.
Max value	The max value, which is the “To” value of the last legend class or a higher value.

Legend classes

	Description
Colour	The RGB colour of the legend class.
From	The “From” value of the legend class.
To	The “To” value of the legend class.
Class label	The label of the legend class.
Last label	The label of the last/bottom tick in the legend.

3.9.3.2 Create a new legend

To start creating a new legend, click on the  button. The legend definition window is opened in “new legend” mode.

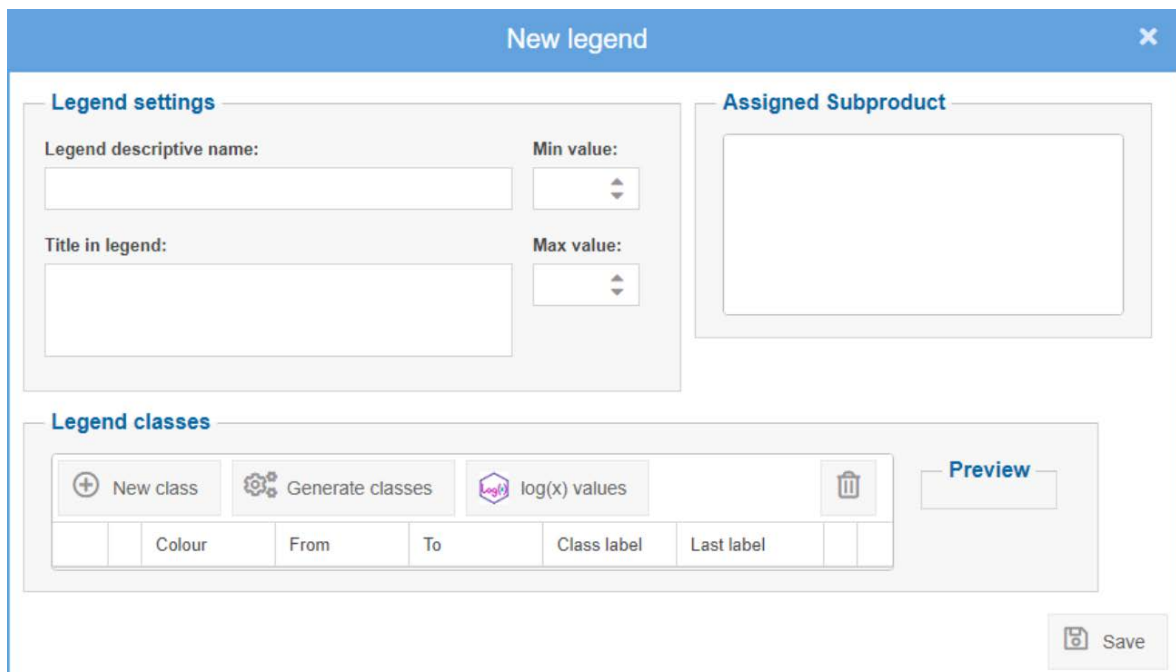


Give the legend a descriptive name and fill in the fields “Min value”, “Max value” and “Title in legend”.

To create classes, click on the “New class” button as many times the legend needs.

You will see a new class record appearing in the legend classes grid for each new class created, with the default values. To change the default values, click on a class field to edit the value manually.

The classes are automatically sorted by the “From” field in ascending order and every change made will be reflected in the “Preview” area.

For the “Colour” field of each class, a colour picker is available. To open the colour picker, click on the  icon.

New legend

Legend settings

Legend descriptive name:

Title in legend:



Min value:

Max value:


Assigned Subproduct


Legend classes

+ New class ⚙️ Generate classes 📊 log(x) values 🗑️

	Colour	From	To	Class label	Last label	
1	 255 255 255	1	2	1		

Preview

 1

 Save

Choose a colour from the colour picker and click on OK.

HEX R G B H S V A

#FF0000 255 0 0 0 100 100 100

Ok

The colour picker will close, and the selected colour will be filled in the colour field of the class in RGB format (with a space delimiter).


Legend classes

+ New class ⚙️ Generate classes 📊 log(x) values 🗑️

	Colour	From	To	Class label	Last label	
1	 43 62 241	1	2	1		

Preview

 1


Instead of adding new classes by clicking on the “New class” button, you can also generate classes. Click on the  **Generate classes** button to open the window to setup the generation of classes.



Classes generation fields

	Description
Nr of classes	The number of classes to generate.
Start value	The “Start” value of the first legend class.
End value	The “End” value of the last legend class.
Start colour	The colour of the first class, from which colour interpolation starts.
End colour	The colour of the last class, from which colour interpolation starts.
Apply class label	When checked a label for all classes will automatically be generated from the class “From” value.

For example:

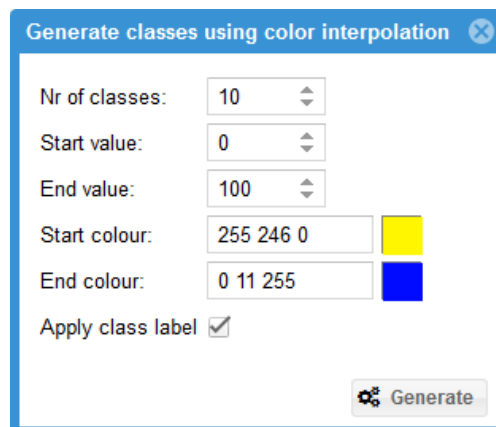

Click on the “Generate” button to generate the classes. The “Generate classes” window will close, and you will see the generated classes in the “New legend” or “Edit legend” window.

New legend

Legend settings

Legend descriptive name:

My legend

Min value:

1

Title in legend:

Test (mm)

Max value:

100

Assigned Subproduct

Legend classes

New class

Generate classes

log(x) values

	Colour	From	To	Class label	Last label	
1	255 246 0	0	10	0.00		×
2	229 222 25	10	20	10.00		×
3	204 199 51	20	30	20.00		×
4	178 175 76	30	40	30.00		×
5	153 152 102	40	50	40.00		×
6	127 124 137	50	60	50.00		×
7	102 105 153	60	70	60.00		×
8	76 81 178	70	80	70.00		×
9	51 58 204	80	90	80.00		×
10	25 34 229	90	100	90.00		×

Preview

Test (mm)

0.00

10.00

20.00

30.00

40.00

50.00

60.00

70.00

80.00

90.00


Save

Click on the  button to delete all classes.


To save the legend, click on the “Save” button. Depending on the number of classes, the saving might take some seconds. When the new legend is saved, a message will appear from the top of the browser. When the new legend is saved, the window title will change in “Edit legend”.



3.9.3.3 Copy a legend

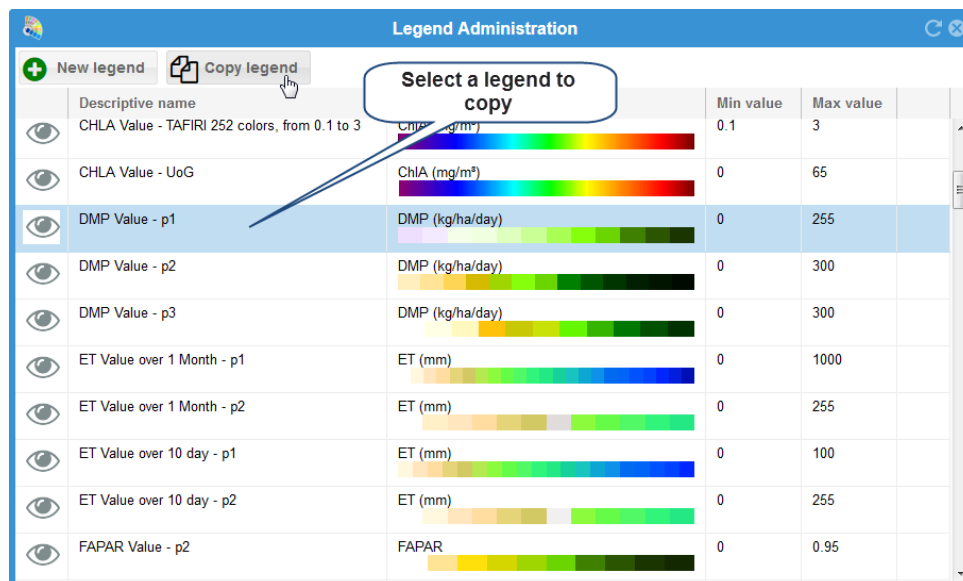Select a legend from the list of existing legends and click on the  **Copy legend** button.

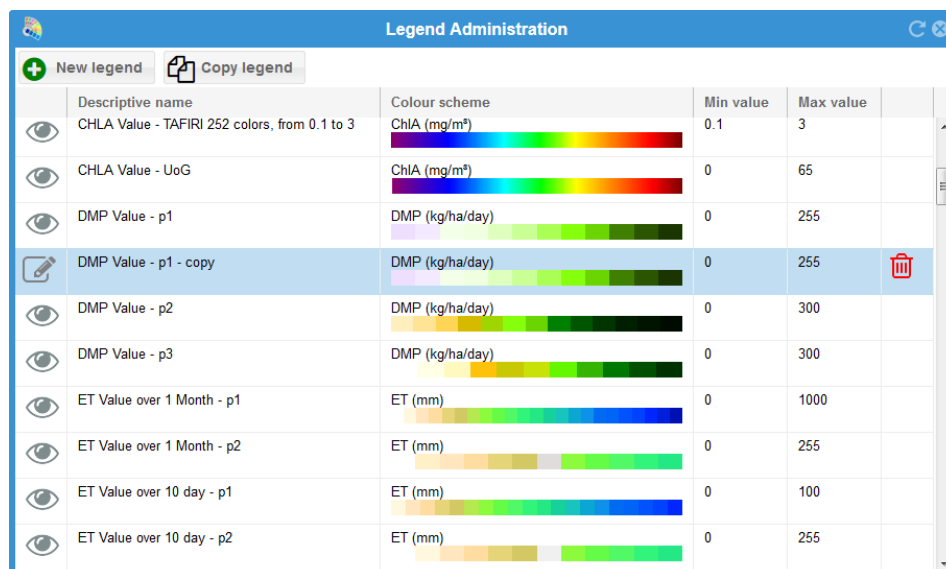


The legend is copied and given the same name ending with – copy.




If you copied a JRC defined legend, the edit  icon will appear next to the copied legend name, and you can now edit the copy. Also, the delete  icon appears to delete the legend.


3.9.3.4 Edit a user defined legend definition

To edit a legend (not defined by the JRC), click on the  icon next to the legend name in the legend administration window. The “Edit legend” window will be opened, where you can make any changes to the legend definition.

3.9.3.5 Assign legends to products


To assign a legend to a product, open the product navigator from any “Map view”.

Go to the product to which you want to assign a legend and click on the  button. A list of available legends will appear.



Descriptive name	Colour scheme	Min value	Max value
2M Temperature	Temperature	270	400
2MT TEMPERATURE	2MT TEMPERATURE Kelvin	273	373
Anomaly: Difference	Anomaly Dif (mm)	-10	10
ASCAT soil water index	Soil water index	0	100
Burnt Area	FIRE Burnt Area	0	2
Chl-a horizontal gradient - 36 steps	Chl A Gradient (mg/m³/km)	0	100
Chl-a horizontal gradient Value - 126 steps, 0 to 10	Chl-a gradient (mg/m³/km)	0	10
CHLA Anomaly: Difference	ChlA Dif (mg/m³)	-10	10
CHLA Anomaly: Difference - 128 steps, -1 to 1	ChlA Dif (mg/m³)	-10	10
CHLA Value - 36 steps, 0 to 10	ChlA (mg/m³)	0	100
CHLA Value - 63 steps, 0 to 10	ChlA (mg/m³)	0	100

Hold the [Ctrl] key for multiple selections!



Select the legend you want to assign by clicking on the legend.


To select more legends, hold the {Ctrl} key and select other legends.

When you have selected the legends, you want to assign to the product, click on “Assign selected legends”.

The new assigned legend(s) will appear in the product navigator under the product’s colour schemes.


3.9.4 Layer administration

The Layer administration tool is available to:


- Edit a layer's properties.
- Create a new layer.
- Upload a vector layer in .geojson format.
- Reorganize the layers under the layer menu button  in Mapviews.
- Set layers to be automatically opened in a Mapview.

3.9.4.1 Open a layer

Open the Layer administration window by clicking on the menu button on the top left corner of the Analysis page.




Layer administration								
The boundaries and names shown in the layers do not imply official endorsement or acceptance by the European Commission.								
Edit	Layer name	Layer file name	Order index	Layer menu	Sub menu	Active	Load in Mapview	Delete
	Central Africa level 0	AFR_CENTRAL_0.geojson	4	Border layers	AU Region: CENTRAL	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	Central Africa area	AFR_CENTRAL_00.geojson	5	Border layers	AU Region: CENTRAL	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	Central Africa level 1	AFR_CENTRAL_1.geojson	3	Border layers	AU Region: CENTRAL	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	Central Africa level 2	AFR_CENTRAL_2.geojson	2	Border layers	AU Region: CENTRAL	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	East Africa level 0	AFR_EAST_0.geojson	4	Border layers	AU Region: EAST	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	East Africa area	AFR_EAST_00.geojson	5	Border layers	AU Region: EAST	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	East Africa level 1	AFR_EAST_1.geojson	3	Border layers	AU Region: EAST	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	East Africa level 2	AFR_EAST_2.geojson	2	Border layers	AU Region: EAST	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	North Africa level 0	AFR_NORTH_0.geojson	4	Border layers	AU Region: NORTH	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	North Africa area	AFR_NORTH_00.geojson	5	Border layers	AU Region: NORTH	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	North Africa level 1	AFR_NORTH_1.geojson	3	Border layers	AU Region: NORTH	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	North Africa level 2	AFR_NORTH_2.geojson	2	Border layers	AU Region: NORTH	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	South Africa level 0	AFR_SOUTH_0.geojson	4	Border layers	AU Region: SOUTH	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	South Africa area	AFR_SOUTH_00.geojson	5	Border layers	AU Region: SOUTH	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	South Africa level 1	AFR_SOUTH_1.geojson	3	Border layers	AU Region: SOUTH	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	South Africa level 2	AFR_SOUTH_2.geojson	2	Border layers	AU Region: SOUTH	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	West Africa level 0	AFR_WEST_0.geojson	4	Border layers	AU Region: WEST	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	West Africa area	AFR_WEST_00.geojson	5	Border layers	AU Region: WEST	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
	West Africa level 1	AFR_WEST_1.geojson	3	Border layers	AU Region: WEST	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

In the Layer administration window, you can quickly activate or de-activate a layer to be shown as an item under the layer menu button  in Mapviews.

Under the “Load in Mapview” column you can quickly set a layer to be automatically loaded in a new Mapview. Setting too many (big) layers to be automatically loaded in a new Mapview, could crash the Browser! So, it is advised to set maximum 3 layers to be loaded automatically.

3.9.4.2 Edit and add a layer

Edit a layer's properties by clicking on the  icon next to the layer.

Edit layer

Layer settings

Layer name:

Africa level 1

Description:

Africa level 1

Layer file name:

AFR_1_g2015_2014.geojson

Select .geojson file

Feature display attributes:

ADM0_NAME, ADM1_NAME

Provider:

FAO Gaul 2015

Layer type:

Polygon

Order index:

3

Layer menu:

Border layers

Sub menu:

Africa

Active:

☒

Automatically open layer in new mapviews:


☐

Draw properties

Name	Value
Outline colour	255,204,0
Outline width	2
Highlight outline colour	89,159,211
Highlight outline width	2
Highlight fill colour	89,159,211
Highlight fill opacity	10
Selected feature outline colour	255,0,0
Selected feature outline width	2

Import .geojson file

Save

Add a new layer by clicking on the  button.

New layer

Layer settings

Layer name:

New layer

Description:

Layer file name:

Select .geojson file

Feature display attributes:

Provider:

Layer type:

Polygon

Order index:

1

Layer menu:

Other layers

Sub menu:

Active:

☒

Automatically open layer in new mapviews:

☐


Draw properties

Name	Value
Outline colour	0,0,0
Outline width	2
Highlight outline colour	89,159,211
Highlight outline width	2
Highlight fill colour	89,159,211
Highlight fill opacity	10
Selected feature outline colour	255,0,0
Selected feature outline width	2

Import .geojson file

Save

Layer settings:

	Description
Layer name	The name of the layer as it appears in the menu.
Description	A description of the layer.
Layer file name	The name of the .geojson file present on the Climate Station under the directory /Climate Station/layers/ can only be selected from the list shown when clicking on the  button (see below).
Feature display attributes	A comma delimited list of feature attribute names that are present in the .geojson layer file. These attributes are shown in the tool bar area of a Mapview when going over a feature and in the Selected region under the time series area when selecting a feature. To find out which attributes are available in a vector layer file, open the file in QGIS and then open its attribute table.
Provider	The provider/creator of the layer. For example, FAO Gaul 2015.
Layer type	The type of layer: Polygon, Line or Point. Only support for Polygon layers has been implemented for now.
Order index	The priority given to the layer for selecting an area/feature. The highest priority is 1 and the lowest priority is 5 (e.g., for level 00 border layers).
Layer menu	The layer menu has 3 main menu items, Border layers, Marine layers and Other layers. A layer must belong to one of these main menu items.
Sub menu	Under the 3 main menu items sub menus can be defined. In this field you can give a name of the sub menu under which the layer will fall.
Active	A layer will appear in the layer menu when it is activated and will not appear in the layer menu when the layer is de-activated.
Automatically open in new mapviews	If this field is checked, the layer will automatically be loaded in a new Mapview.

Select a layer present on the Climate Station by clicking on the **Select .geojson file** button. A list is shown of all the .geojson files present under the directory /Climate Station/layers/ on the Climate Station.

Layer file name ↑	File size
AFR_00_g2015_2014.geojson	46606388
AFR_0_g2015_2014.geojson	53745577
AFR_1_g2015_2014.geojson	125749623
AFR_2_g2015_2014.geojson	263462542
AFR_MARINE/AFR_EEZ_IHO_union_v2.geojson	954424
AFR_MARINE/AFR_FAO_FISH_AREA.geojson	842329
AFR_PA/AFR_PA_ID.geojson	20861221
RIC_BDMS_00_g2015_2014.geojson	19665773
RIC_BDMS_0_g2015_2014.geojson	21788089
RIC_BDMS_1_g2015_2014.geojson	59949507
RIC_BDMS_2_g2015_2014.geojson	130573720
RIC_CICOS_0_g2015_2014.geojson	3275580
RIC_CICOS_1_g2015_2014.geojson	6304465
RIC_CICOS_2_g2015_2014.geojson	11626652
RIC_CRA_00_g2015_2014.geojson	14326951
RIC_CRA_0_g2015_2014.geojson	15998678
RIC_CRA_1_g2015_2014.geojson	26534809
RIC_CRA_2_g2015_2014.geojson	58228514
RIC_ICPAC_00_g2015_2014.geojson	9602049
RIC_ICPAC_0_g2015_2014.geojson	10283525
RIC_ICPAC_1_g2015_2014.geojson	33641100
RIC_ICPAC_2_g2015_2014.geojson	67187318
RIC_IGAD_00_g2015_2014.geojson	6558141
RIC_IGAD_0_g2015_2014.geojson	7383595
RIC_IGAD_1_g2015_2014.geojson	26172860
RIC_IGAD_2_g2015_2014.geojson	10076017

3.9.4.3 Import a layer

Import a layer file by clicking on the **Import .geojson file** button. The layer has to be in .geojson format, which is the only format supported in a browser by the JavaScript library Openlayers.

Import layer


Import

Reset

Close

3.9.5 Graph view functionalities

In this version there are 4 types of graphs available.

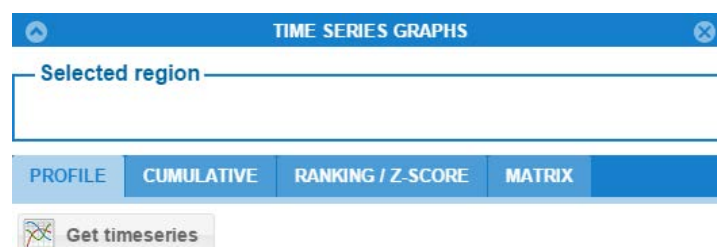

Profile	To display the evolution (X axis) profile of a product value (Y axis) for a given period
Cumulative	To visualize the cumulated value (Y axis) of a product/indicator along the time (X axis)
Ranking / Z-Score	Sort the historical values of a product for a given period/year Display the normalize value (y axis) of a product for a given period/year along the historical years (X axis)
Matrix	To display the seasonal(X-axis) value of a product along the historical years(Y-axis)

Each type has its own purpose, options and restrictions.


IMPORTANT!

To generate time series, visualized in a chart/graph, the user will have to select an area of interest from an added vector layer or a drawn geometry in one of the open Mapviews. The geometry of the selected area will be highlighted in **red** in the Mapview and its name shown in the “Selected region” box in the TIME SERIES GRAPHS panel.

3.9.5.1 General steps to generate a time series graph

General steps to generate a time series graph, to be taken in the TIME SERIES GRAPHS panel on the right of the analysis tool:

1. Select an area of an added vector layer or a drawn geometry in one of the open Mapviews.
2. Select one or more sub products.
3. Check the selected products and unselect the ones not needed.
4. Select a time frame
5. Click on the “Get timeseries” button

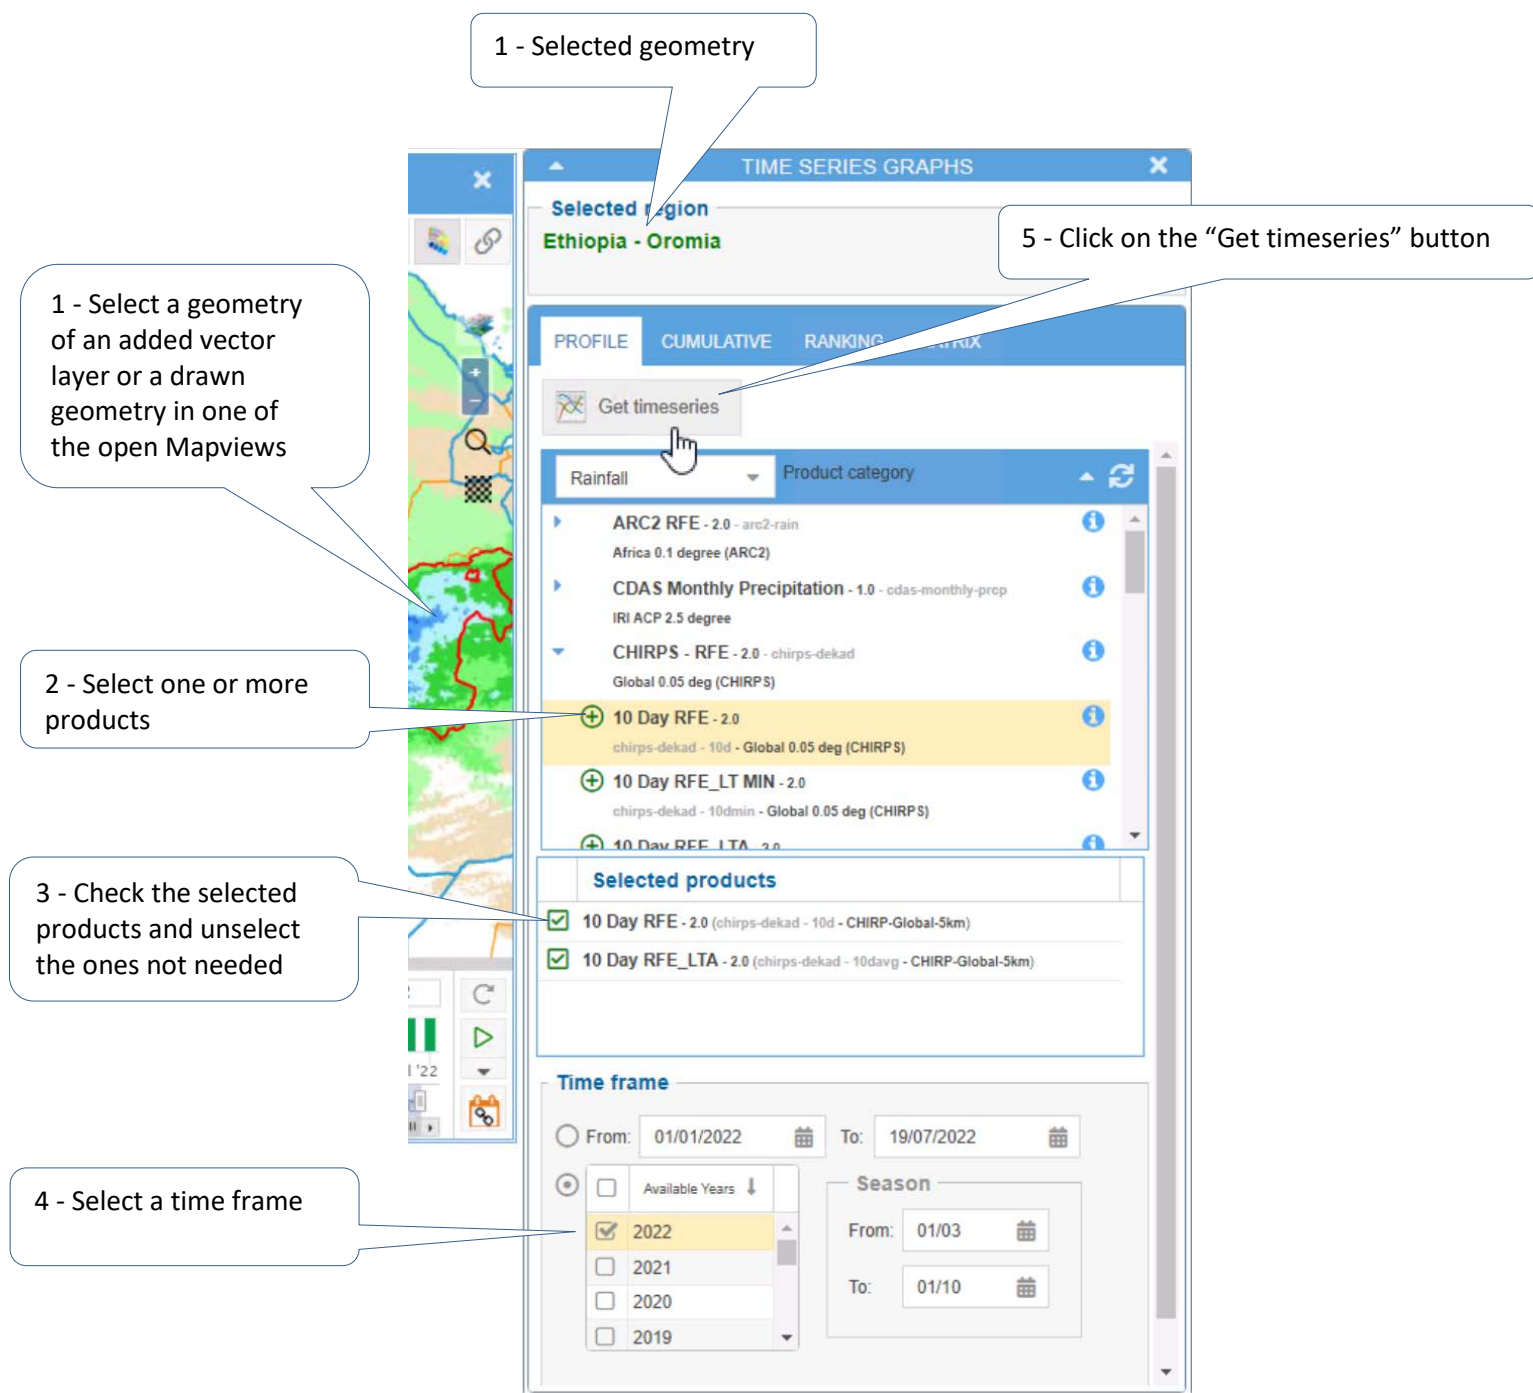


A new time series graph window will be opened, showing the chart type with the time series of the selected data sets, over the selected region of the chosen time frame.

All graphs are interactive and will show the time series values of each time series when moving the mouse of the chart.

3.9.5.2 Profile graph


Description

The profiles graph is used to display along the X axis time period from one to several Y axes products variables with different units and scales. The data can be displayed as a bar or line with different line thicknesses and colours...The font and styles of the titles and annotation can be interactively edited. The title can use the attributes name index of the entity (point/line/polygon) selected and from which the indicators value is calculated (count, average, cumulate, percentage, surface) as shown below.

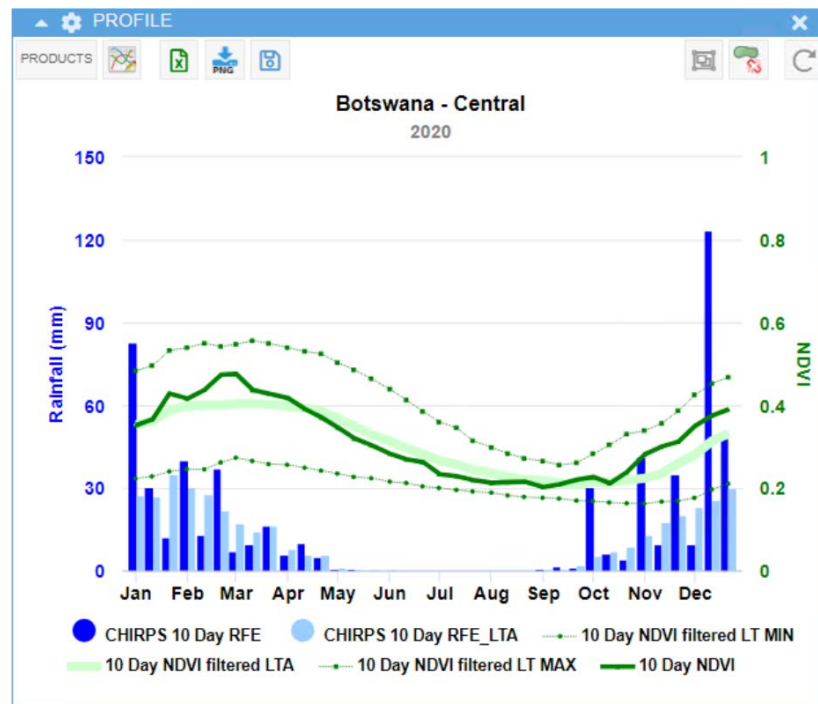

Product selection

Multiple products can be selected from multiple product categories.

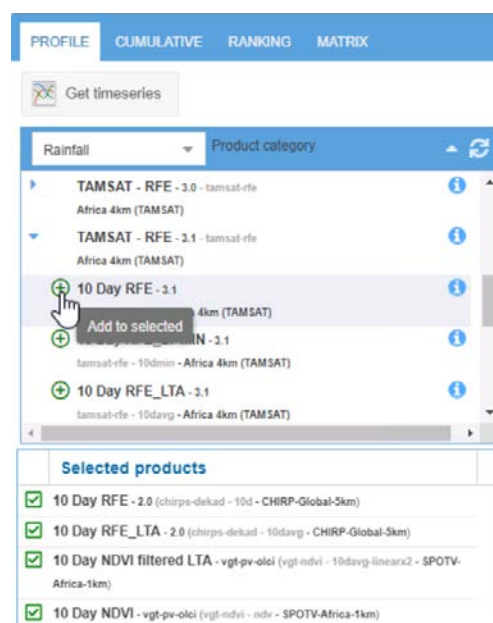

Time frame selection

Time frame

☒ From: To:



☐

☐ Available Years ↓

☐ 2017
 ☐ 2016
 ☐ 2015
 ☐ 2014

Season


From:
 To:

From – To	The “From-To” time frame can span over multiple years. Format dd/mm/yyyy.
Available Years	<p>Multiple years can be selected from the list of available years of the selected sub products. In case of multiple years, the graph will show the time series of each sub products of each selected year.</p> <p>Multiple years can be selected from the list of available years of the selected product. The checkbox near the “Available Years” title will select all the years.</p> 
Compare seasons	<p>For the selected year(s) of interest give a season period in the “From-To” fields. The season period can span over 2 years, starting for example from 01/09 of the selected year(s) and ending on 01/05 of the following year.</p> 

3.9.5.3 Cumulative graph

Description

The graph displays the accumulation of the Y axis product variable from the first to the last dates selected on the X axis. It can be compared to another variable typically a specific year compared to the Long-Term Average (or minimum or maximum) of the same variable. The positive difference is shown in green when the negative is red. Like for the profile graph it is possible to edit the line thickness and colour, the titles and axis fonts and colours.

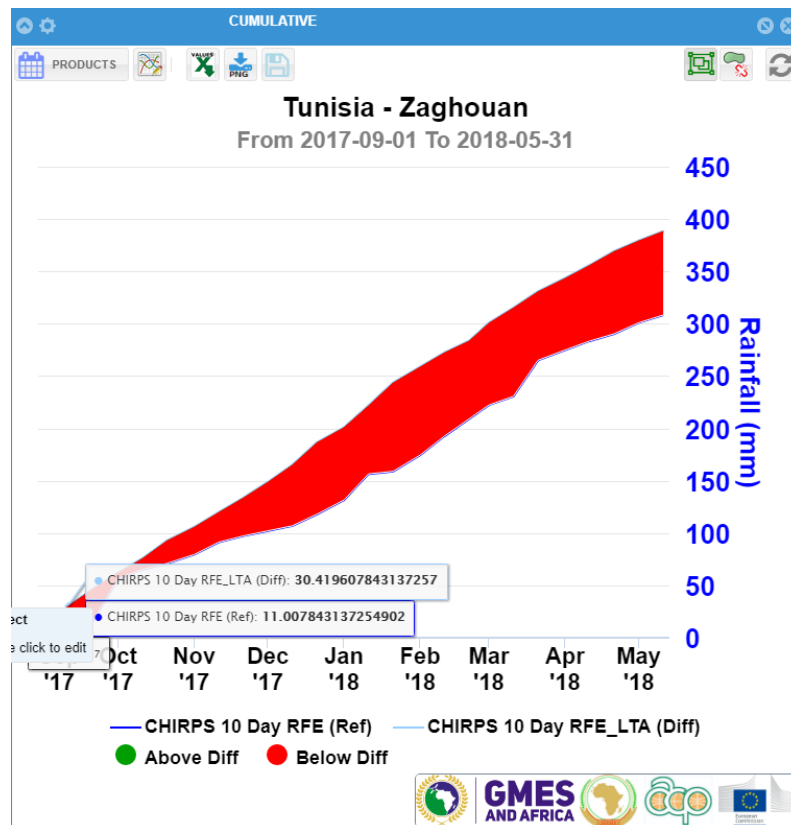

Product selection

Multiple products can be selected from multiple product categories.

All selected products will be a cumulative line in the time series graph.


In

Selected products	Ref	Diff
-------------------	-----	------

 you have the option to indicate what is the 'Reference' (Ref) product or the 'Difference' (Diff) product:

- when 'Ref' is **below** 'Diff' a **RED** colour will be shown.
- when 'Ref' is **above** 'Diff' a **GREEN** colour will appear.

Only one product is the Reference and one product the Difference.

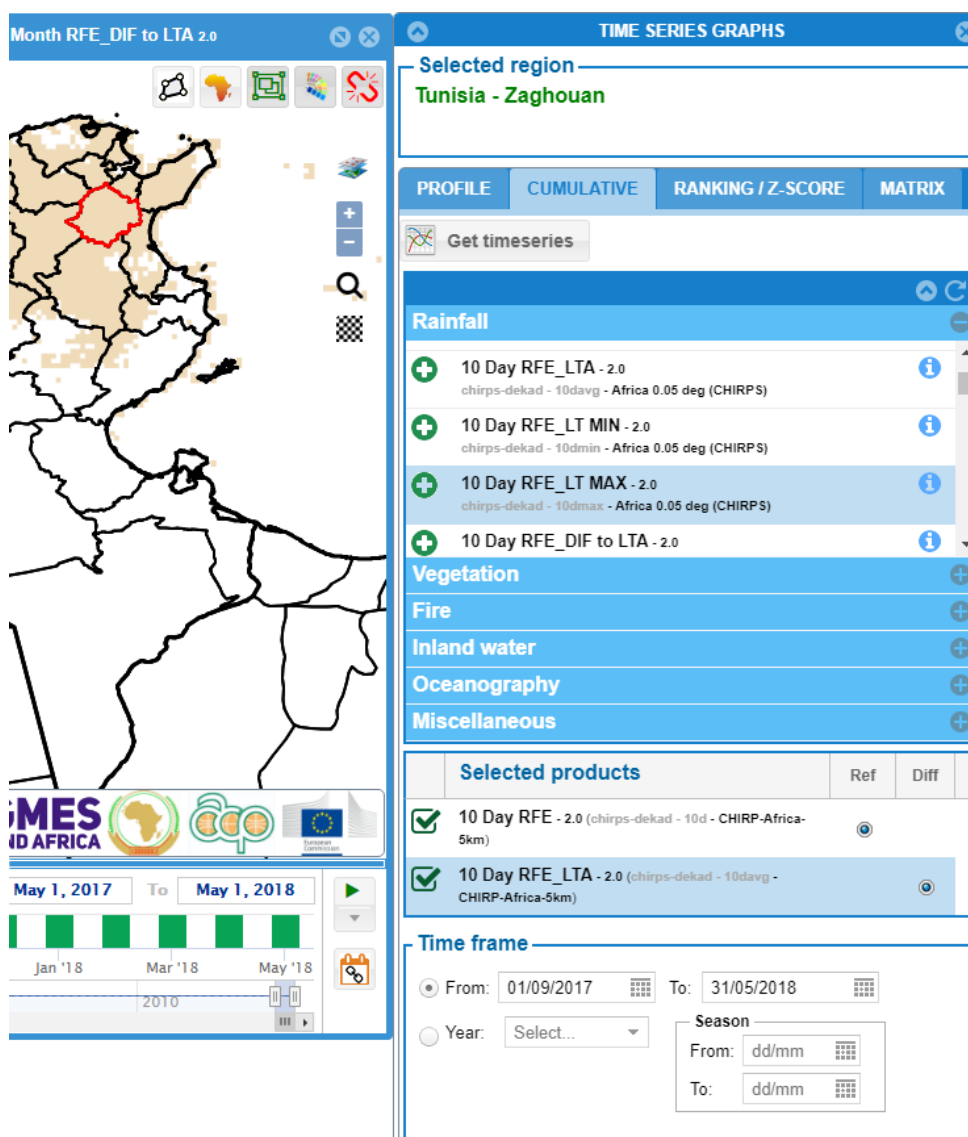

The screenshot displays the Climate Station interface. On the left, a map of Africa is shown with a red outline indicating the selected region, Tunisia - Zaghouan. Below the map, there are logos for MES, ID AFRICA, and the European Union, along with a date range from May 1, 2017, to May 1, 2018, and a calendar view. On the right, the 'TIME SERIES GRAPHS' panel is visible. It includes a 'Selected region' dropdown set to 'Tunisia - Zaghouan' and tabs for 'PROFILE', 'CUMULATIVE', 'RANKING / Z-SCORE', and 'MATRIX'. The 'CUMULATIVE' tab is active, showing a list of products under the 'Rainfall' category. The selected products are '10 Day RFE - 2.0 (chirps-dekad - 10d - CHIRP-Africa-5km)' and '10 Day RFE_LTA - 2.0 (chirps-dekad - 10davg - CHIRP-Africa-5km)'. The 'Time frame' section shows a date range from 01/09/2017 to 31/05/2018, with a 'Season' dropdown set to 'Select...'.

Time frame selection

Time frame

☐ From: 01/01/2015 to: 03/05/2017

☒ Year: 2015


Season
 From: 01/08 to: 01/06

From – To	The “From-To” time frame can span over multiple years. Format dd/mm/yyyy.
Year	<p>Only one year can be selected from the list of available years of the selected products.</p> <p> <input checked="" type="radio"/> Year: 2015 </p>
Compare seasons	<p>For the selected year give a season period in the “From-To” fields. The season period can span over 2 years, starting for example from 01/08 of the selected year(s) and ending on 01/06 of the following year.</p> <p> Season From: 01/08 to: 01/06 </p>


3.9.5.4 Ranking / Z-Score graph

Description

To better compare the product value of a given period for a specific year with the historical time series it is possible to apply a ranking from the lowest to the highest corresponding value. It clearly shows the exceptional years with the highest or lowest values of the selected products.

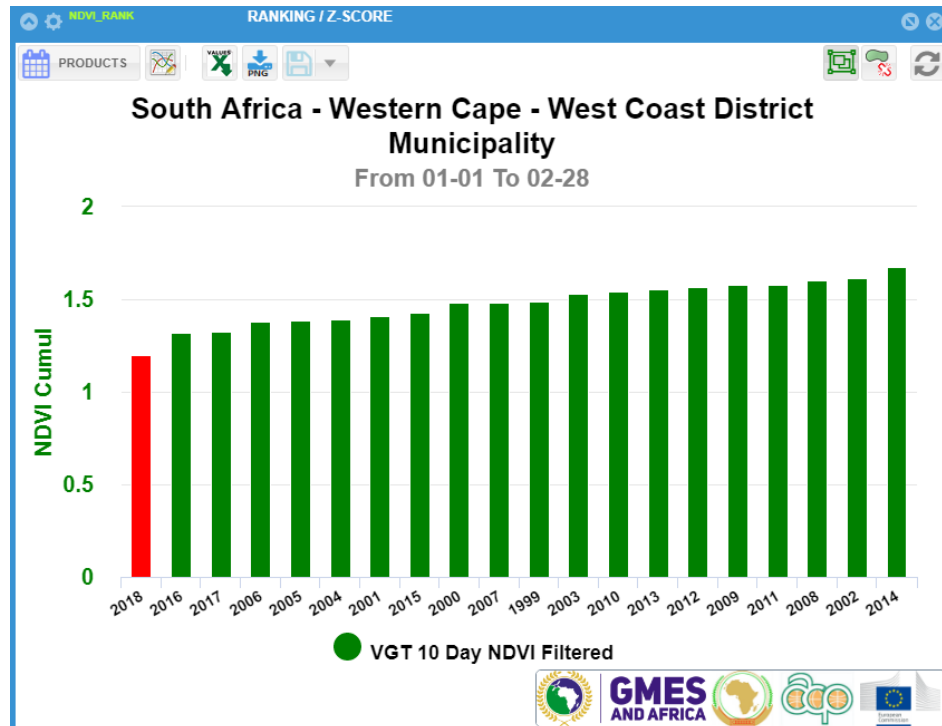


Moreover, it is possible to display on the Y axis the Z-Score value $[(\text{Year value} - \text{Mean value}) / \text{Standard deviation}]$ along the years X axis in a chronological order as shown below.

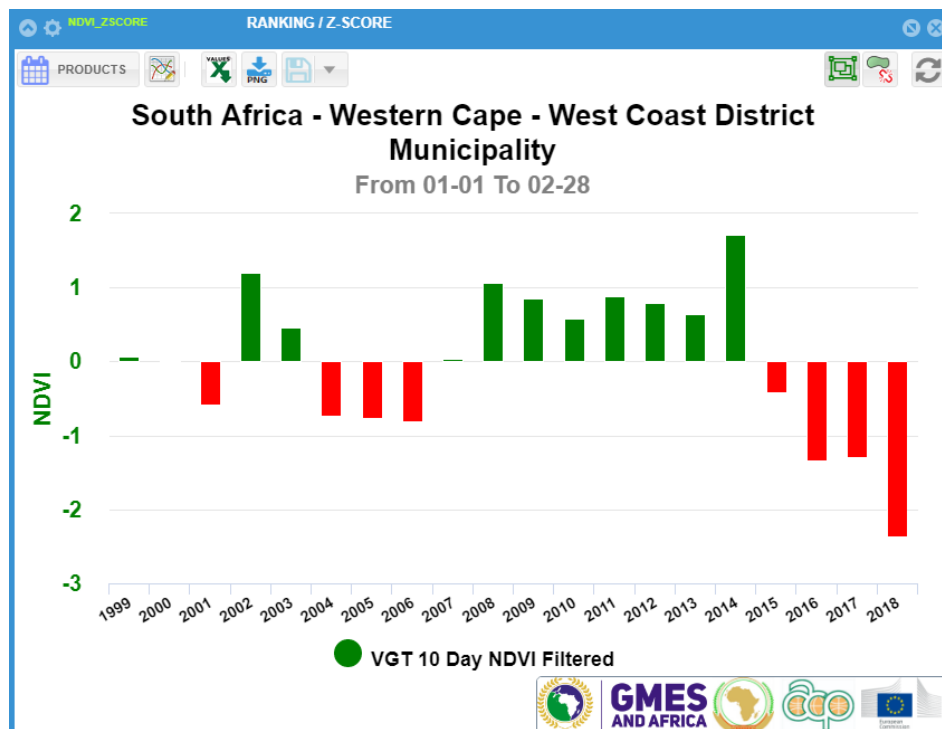

Product selection

Only one product can be selected for the Ranking / Z-Score.

For the selected product you have the option to visualize the Z-Score instead of Ranking.

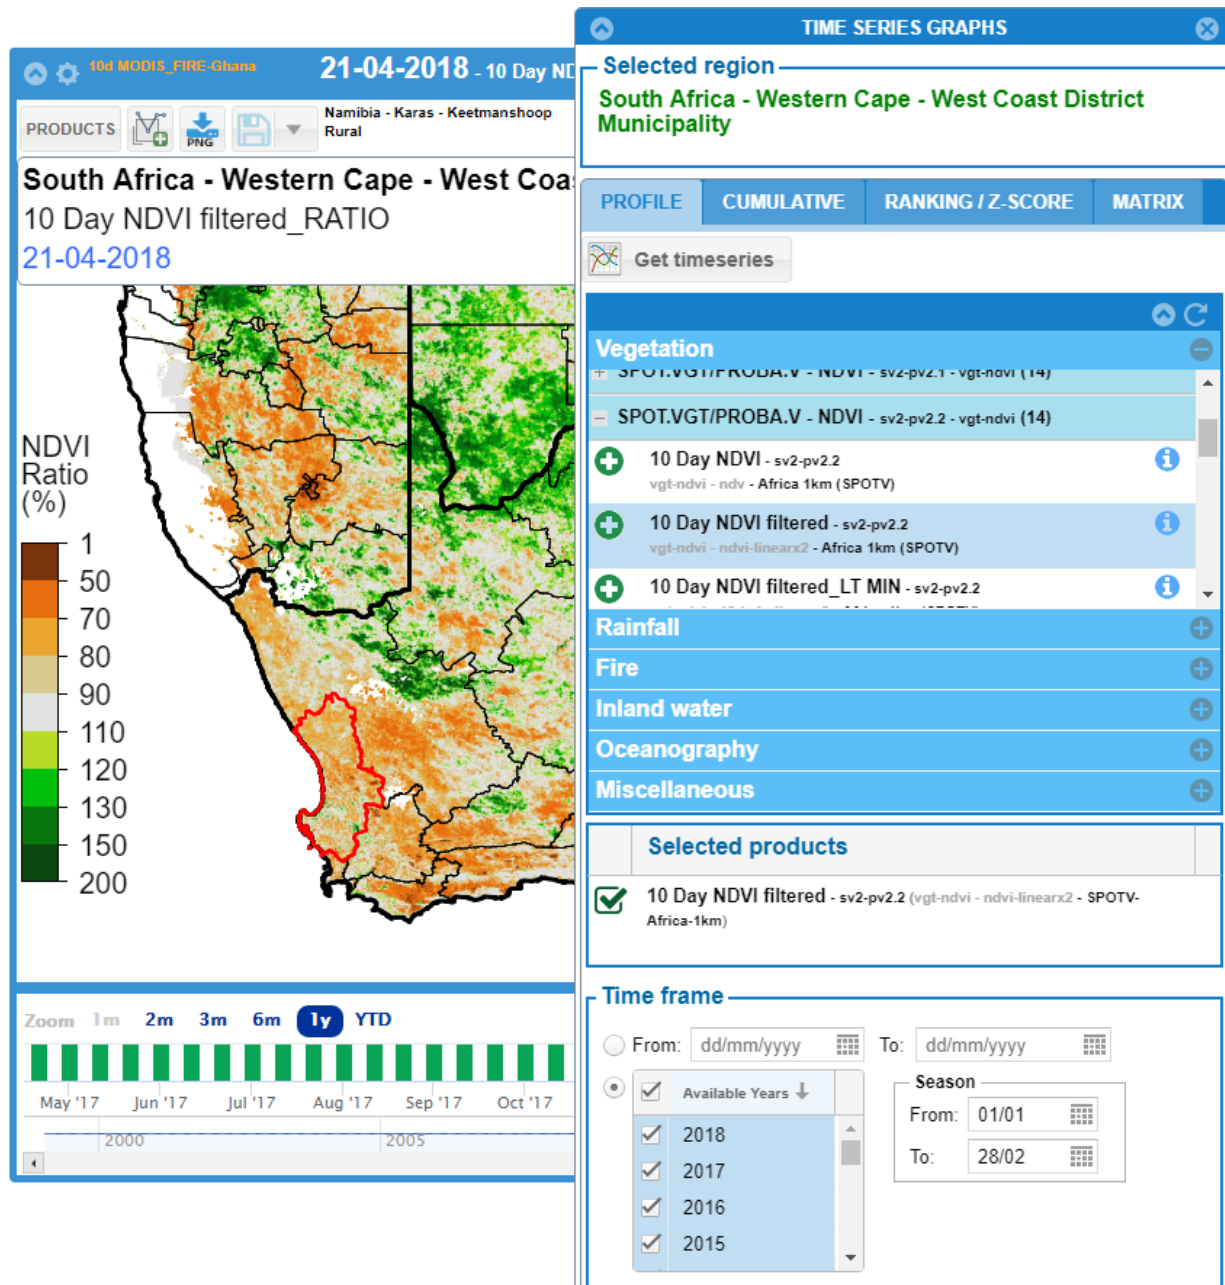

Time frame selection



Time frame

☐ From: dd/mm/yyyy To: dd/mm/yyyy

☒ Available Years ↓

- ☒ 2018
- ☒ 2017
- ☒ 2016
- ☒ 2015


Season
 From: 01/01 To: 28/02

Available Years	<p>Multiple years can be selected from the list of available years of the selected product. The checkbox near the “Available Years” title will select all the years.</p> <p>With a Ranking and Z-Score graph you normally select all the years.</p> 
Compare seasons	<p>For the selected years give a season period in the “From-To” fields. The season period can span over 2 years, starting for example from 01/01 of the selected year(s) and ending on 28/02 of the following year.</p> 


3.9.5.5 Matrix graph

Description

The Matrix graph (or Heatmap) is used to get a synoptic overview of the historical evolution of a specific product (like rainfall, temperature, NDVI...). It facilitated the identification of exceptional years and the inter years comparison. It displays on the X axis a specific seasonal value over the different historic year on the Y axis. To be consistent with the map the user can interactively select any existing map colour palette of a given product.

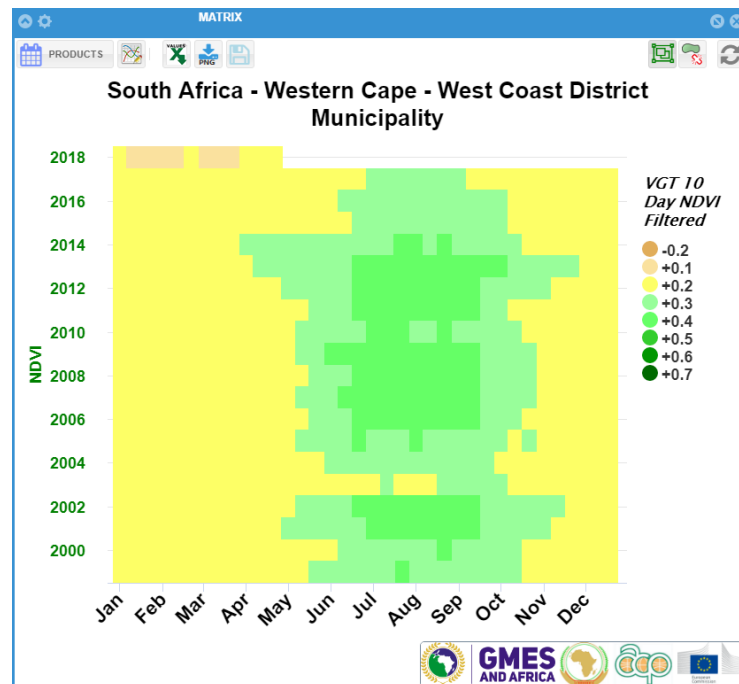

Full color palette display

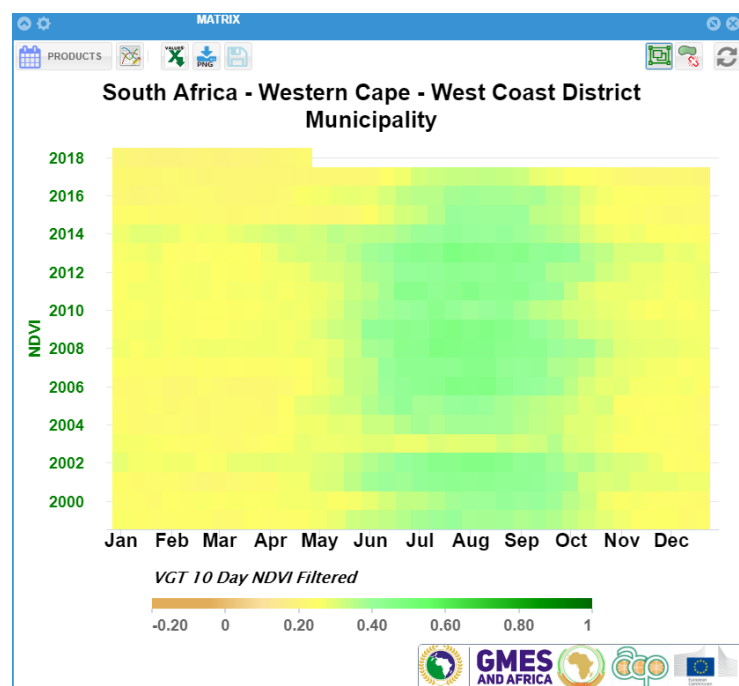


Gradient color palette display

Product and colour scheme selection

Only one product can be selected for the Matrix graph.

Under the selected product you will find its available colour schemes, where the default colour scheme is selected. Choose the colour scheme you want to apply to the Matrix graph.

For the selected product you have the option to visualize the Matrix in gradient, which means that apart from the colour steps of the selected colour scheme, intermediate colours are generated. For colour schemes with more than 25 steps, the gradient still will automatically be taken.

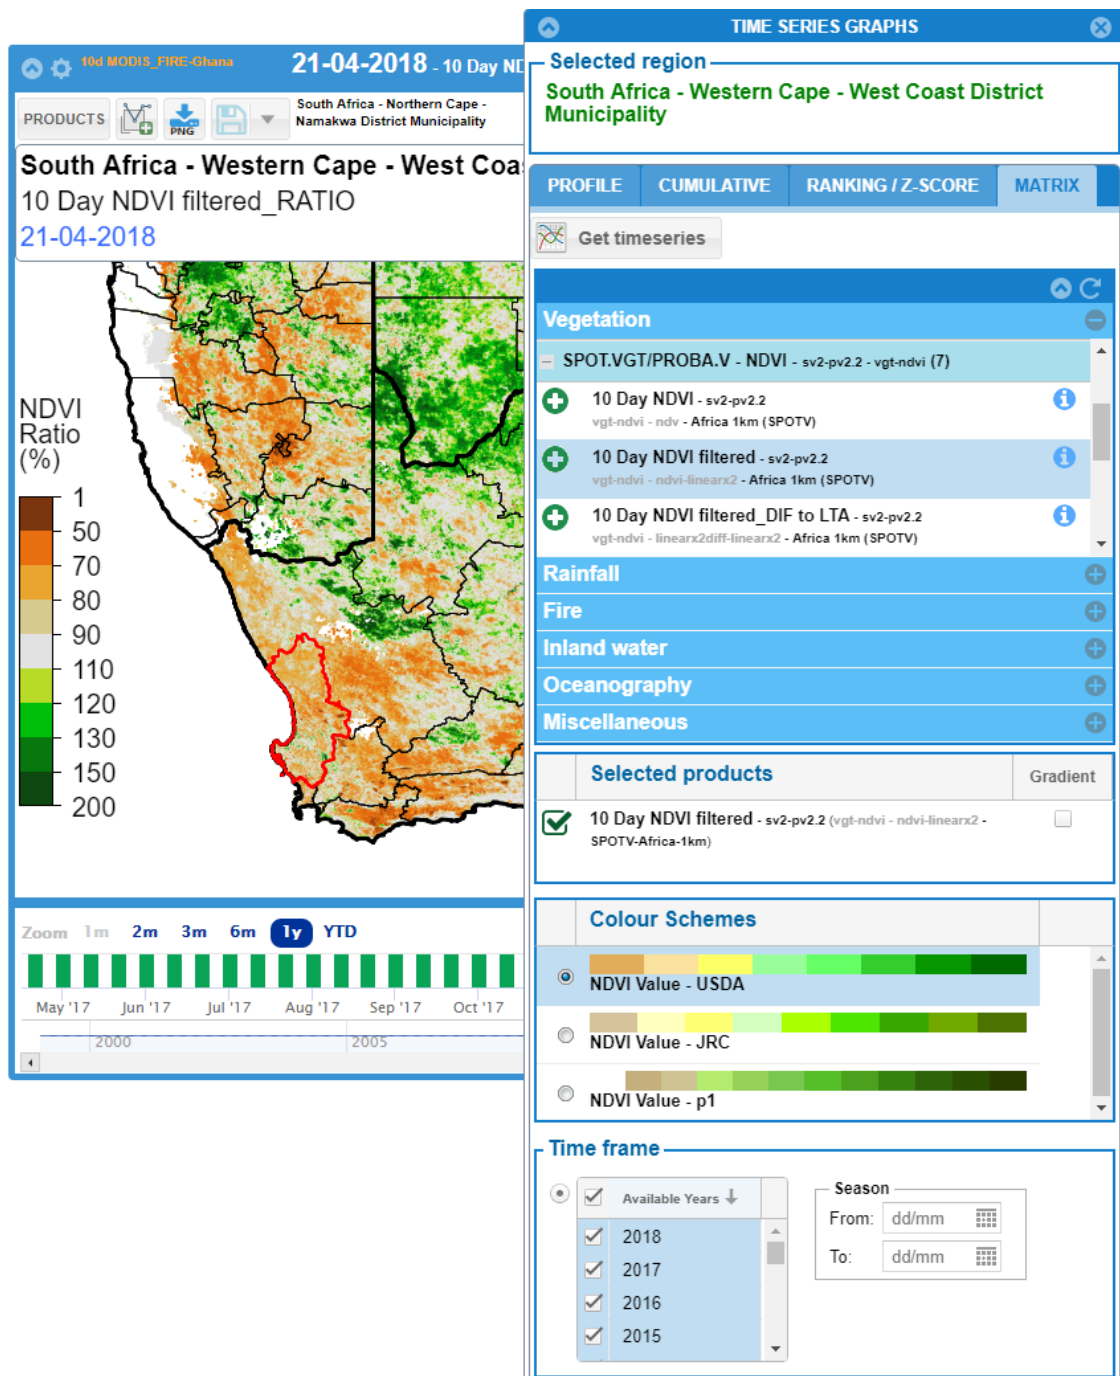

Time frame selection



Time frame

☒ Available Years ↓

☒ 2017
 ☒ 2016
 ☒ 2015
 ☒ 2014


Season
 From: 01/01

 to: 01/05


Available Years	<p>Multiple years can be selected from the list of available years of the selected product. The checkbox near the “Available Years” title will select all the years.</p> 
Compare seasons	<p>For the selected years give a season period in the “From-To” fields. The season period can span over 2 years, starting for example from 01/09 of the selected year(s) and ending on 01/04 of the following year.</p> 

3.9.5.6 Chart zooming

You can also zoom in by selecting an area in the chart. The chart will change and show only the plot over the selected zoom.

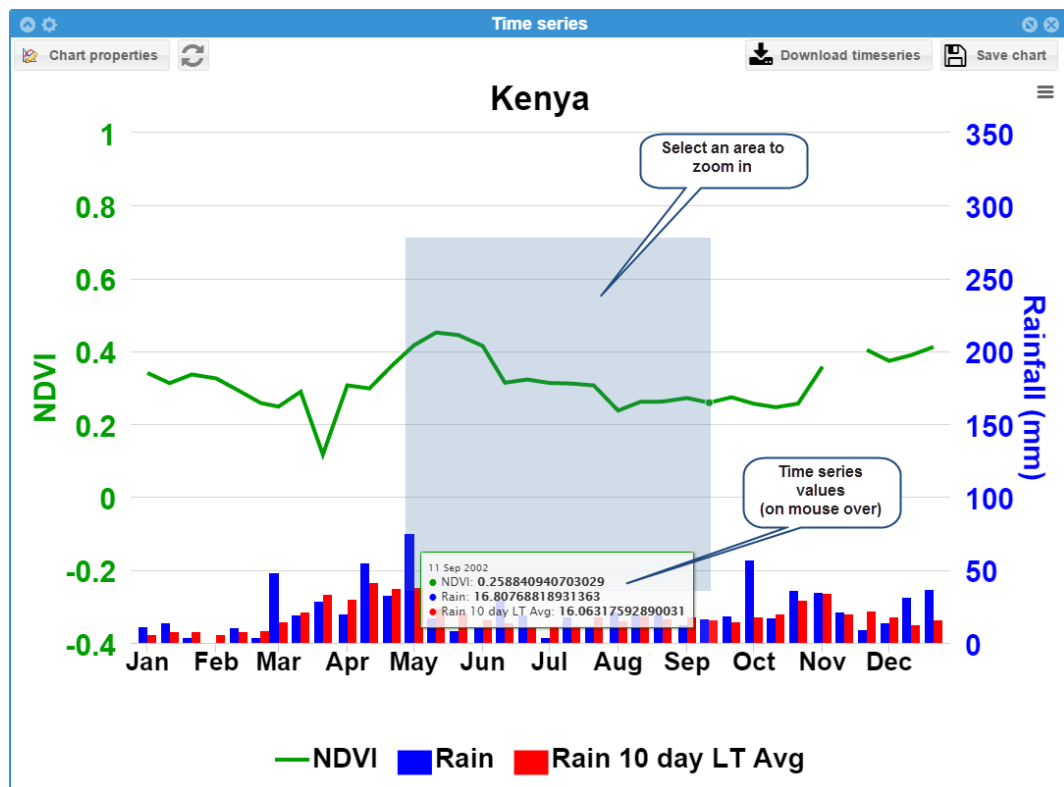


To zoom out, click on the **Reset zoom** button in the chart.

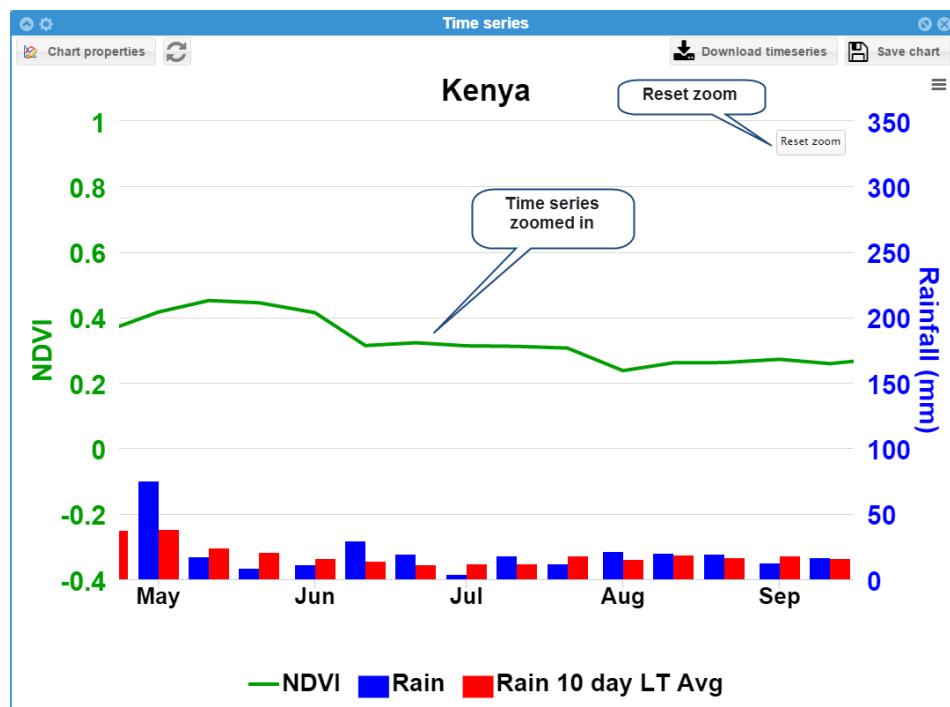


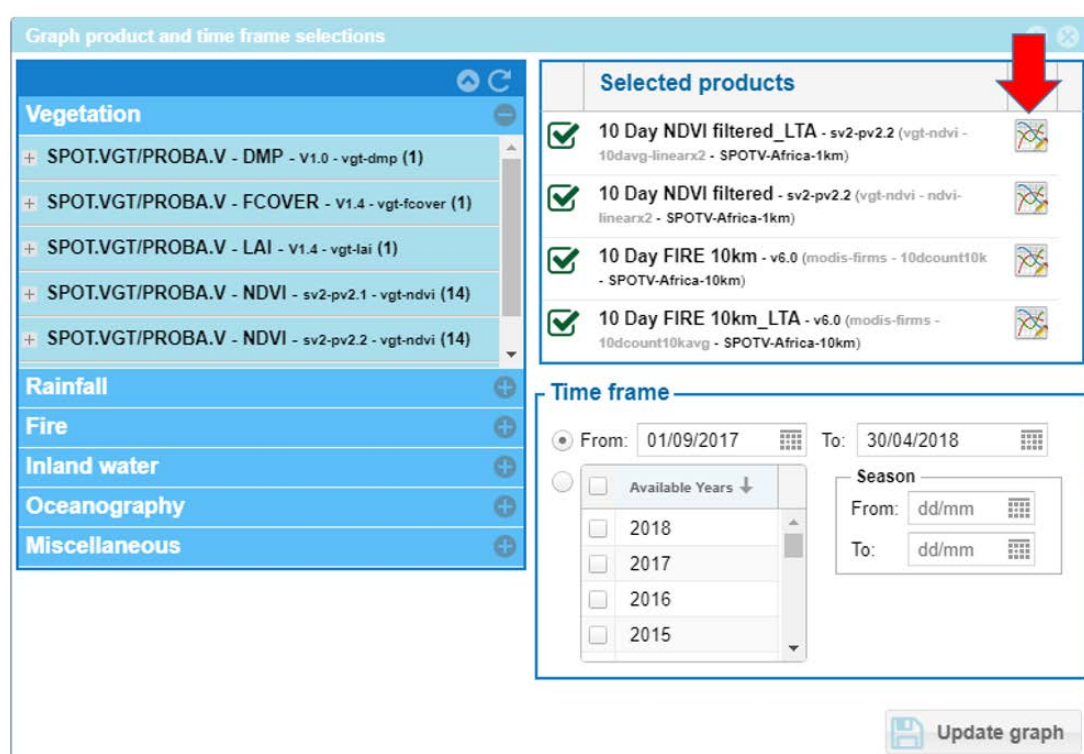
3.9.5.7 Draw properties

To modify a graph, you can edit the draw and the chart properties through two specific icons.

For all the available time series datasets default draw properties are given. To change these draw properties, click on the  icon on the top left of the graph window.




A new window will appear and to modify the draw properties of a specific products click on the corresponding icon  .



The time series draw properties window will pop up for the dataset in question.

Draw properties for : vgt-ndvi - sv2-pv2.2 - 10davg-linearx2	
Name	Value
Yaxe ID	ndvi
Name in legend	VGT 10 Day NDVI Filtered_LTA
Chart type	line
Line style	Solid
Line width	8
Colour	204,255,204

Yaxe ID	The Yaxe ID defines to which Yaxe the time series dataset belongs. When 2 or more time series datasets belonging to the same Yaxe ID are selected, then these datasets will fall under the same Yaxe in the chart. If the selected time series datasets belong to different Yaxe IDs, then for each Yaxe ID a Yaxe is created in the chart. Each Yaxe ID has common properties that can be changed in the chart properties (see paragraph 3.9.4.2).
Name in legend	The name of the time series in the legend of the chart.
Chart type	The chart type, Line or Column.
Line style	The style of the line if chart type is Line. Styles are for example: Solid, Dot, Dash, DashDot, etc.
Line width	The width of the line if chart type is Line.
Colour	The colour of the time series dataset in the chart.

To apply the modification on the graph, click on the update button .

3.9.5.8 Chart properties

To open the chart properties, click on the  button, found in the tool bar of a chart window.



Chart properties are the properties that apply to all charts generated, plus the properties of each X and Y Axis in the generated chart. Changing a property value will be applied immediately to the chart, except for the aggregation fields.

To apply the aggregation field changes, refresh the chart by clicking on the  button.

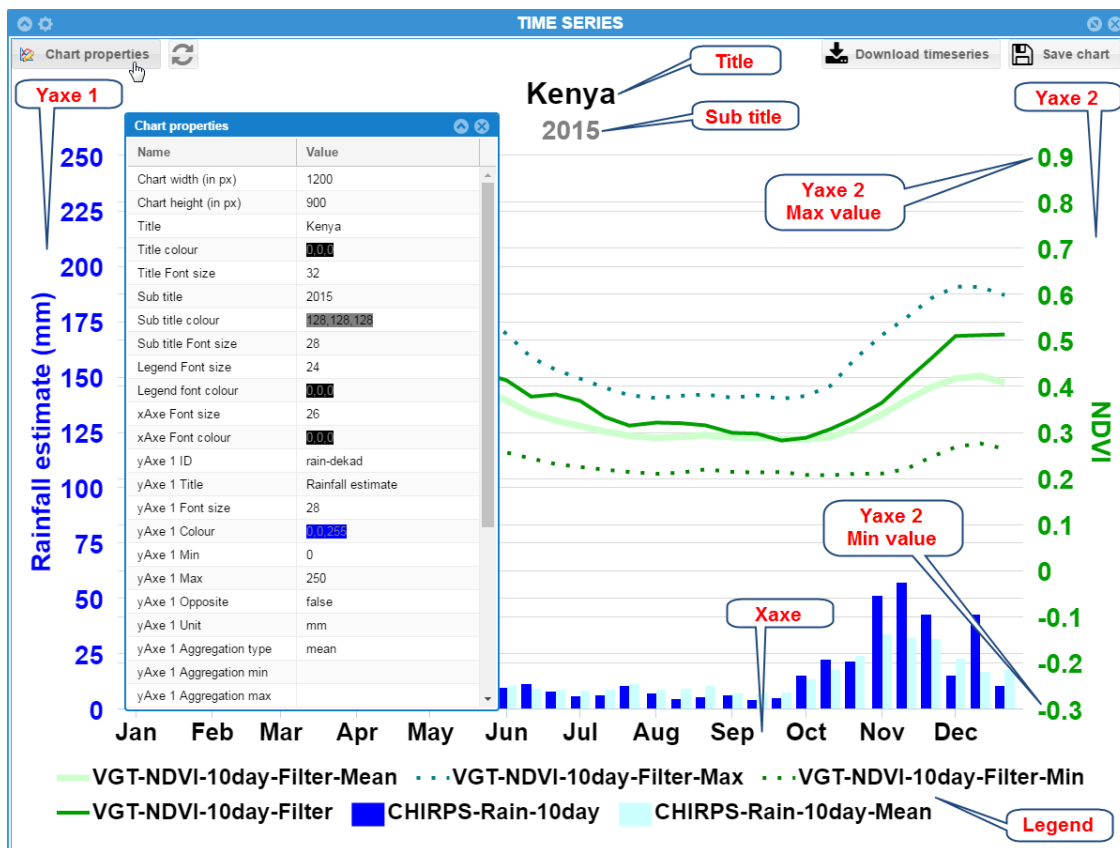


Chart width (in px)

The width of the chart in pixels.

Chart height (in px)

The height of the chart in pixels.

Title

The chart title that by default is the name of the selected region.

Title colour

The colour of the chart title.

Title Font size

The font size of the chart title.

Subtitle

The chart subtitle that by default is the selected time period.

Subtitle colour

The colour of the chart subtitle.

Subtitle Font size

The font size of the chart subtitle.

Legend Font size

The font size of the chart's legend items.

Legend Font colour

The font colour of the chart's legend items.

xAxe Font size

The font size of the xAxe.

xAxe Font colour

The font colour of the xAxe.

yAxe # ID

The yAxe ID uniquely identifying the yAxe fields below. One or more time series datasets can have the same yAxe ID assigned, indicating that these datasets will appear on the same yAxe in the chart, when selected. This field cannot be edited here in the chart properties. You can change the yAxe ID for each time series dataset individually editing the time series draw properties (see paragraph 3.9.5.1 Time series draw properties).

yAxe # Title



The yAxe title.


yAxe # Font size	The font size of the yAxe title and values.
yAxe # Colour	The colour of the yAxe title and values.
yAxe # Min	Set the yAxe minimum value to start with.
yAxe # Max	Set the yAxe maximum value.
yAxe # Opposite	If TRUE, the yAxe will be placed on the opposite/right side of the chart. If FALSE, the yAxe will be placed on the left side of the chart.
yAxe # Unit	The unit of the time series yAxe, shown in the yAxe title.
yAxe # Aggregation type	Type of aggregation applied to compute the value at polygon level from pixels. Possible values are: <ul style="list-style-type: none"> • mean: average of all valid⁶ values in the polygon. 'Nodata' values are excluded, while aggregation min/max are not considered. Example: vegetation indicators (vgt-ndvi) • cumulate: arithmetic sum of all valid values in the polygon; aggregation min/max are not considered. Example: precipitation (fewsnet-rfe). • count: returns the number of valid pixels in the polygon having values in the range aggregation min to aggregation max. Example: Active Fires (modis-firms) • percent: returns the percent of valid pixels in the polygon having values in the range aggregation min to aggregation max. Example: in vegetation anomaly indicators, to identify strong anomalies. • surface: geographic extension of the area – within the polygon – where pixels are in range aggregation min to aggregation max. Example: water bodies (wd-gee)
yAxe # Aggregation min	Used for aggregation type 'count', 'percent' and 'surface' as described above.
yAxe # Aggregation max	Used for aggregation type 'count', 'percent' and 'surface' as described above.

⁶ In the current context, 'valid' means that we exclude the 'nodata' values.

3.9.5.9 Logo and disclaimer objects

Like for the map, the graph has Logo and Disclaimer objects that you can show and hide in the graph viewer.

To show the objects, click on the  button. The button becomes green  and the two objects are shown in the graph area.

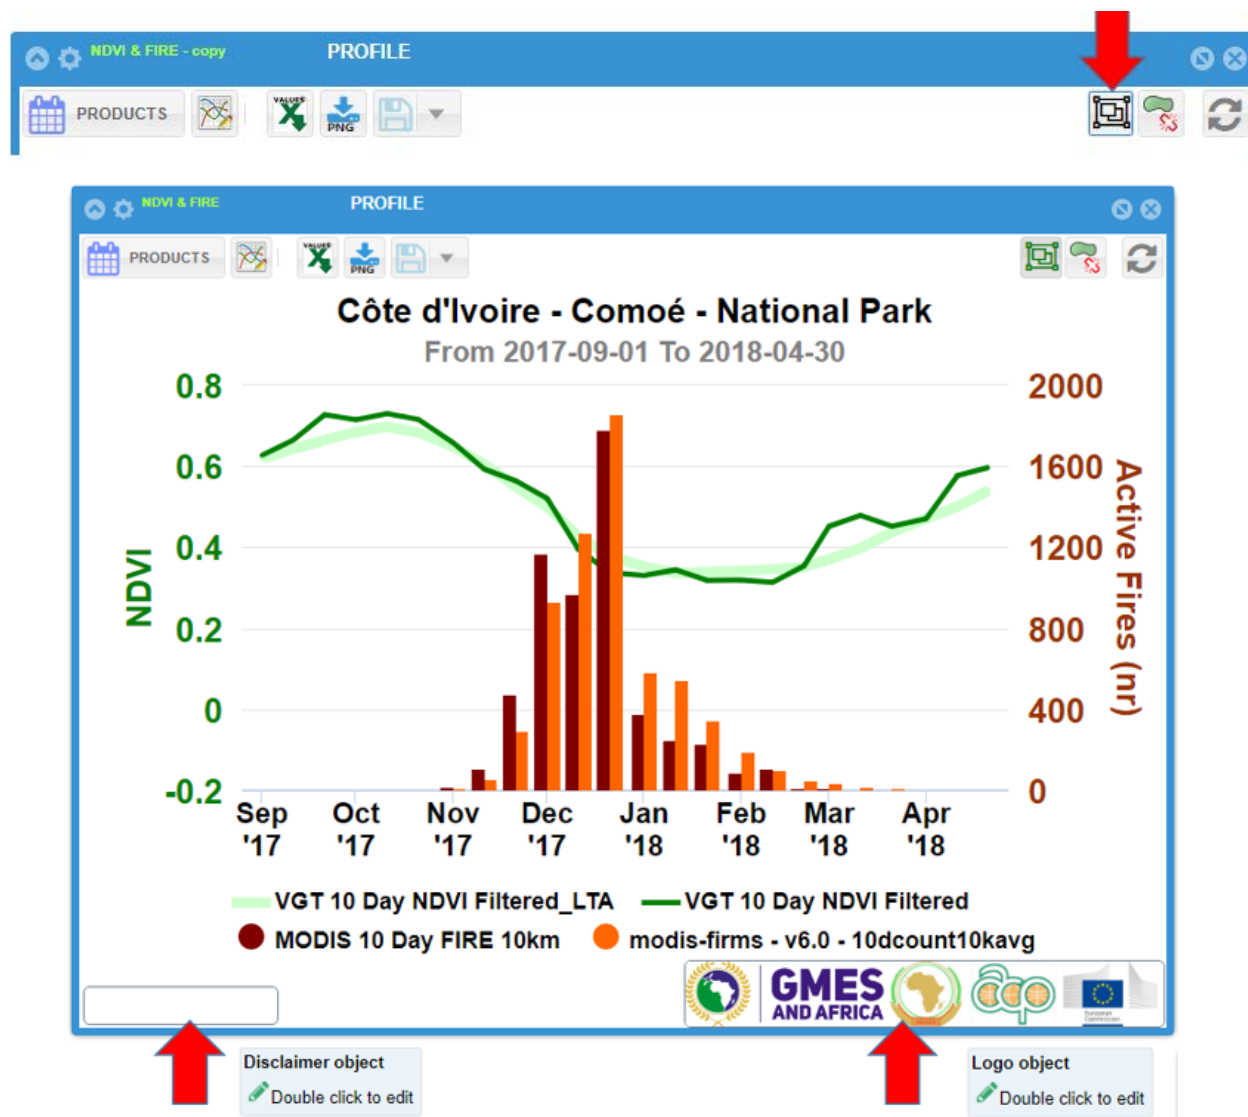


You can move the two objects by click and hold on an object and drag it to reposition.


3.9.5.9.1 Edit Disclaimer object

Double-click the Disclaimer object to edit it. The disclaimer editor is shown. You can type any text and format the text using the available text formatting tools in the editor.

- To save your changes, click on the save button found in the header of the editor.

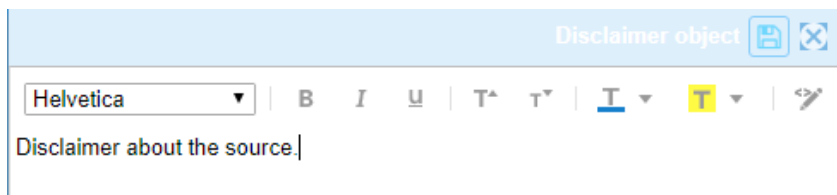

- The editor will close, and the changes reflect in the disclaimer object of the Chart view.

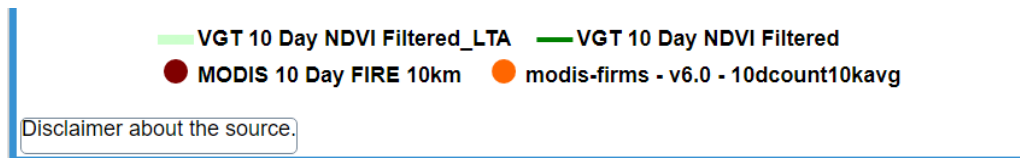


3.9.5.9.2 Edit Logo object


Double-click the **Logo object** to edit it. The logo editor is shown.

The upper box contains the selected logo's that will appear in the logo object. The lower box contains the available logos.

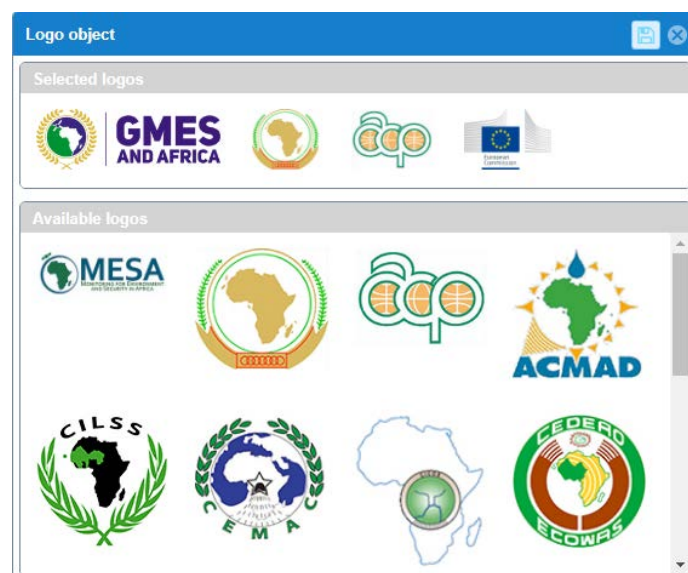

- Double-click on a logo in the selected logo's box to remove the logo.
- Double-click on a logo in the available logo's box to add the logo to the selected box.
- To save your changes, click on the save button found in the header of the editor.

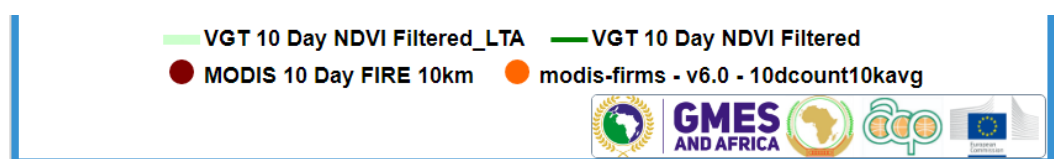

- The editor will close, and the changes reflect in the disclaimer object of the Chart view.




3.9.5.10 Dynamic/Static graph values

To explore the different values aggregated from the layer polygons/points the user can activate the exploratory mode icon from OFF  to ON  in the graph window tool bar.




When activated the user can select any polygon/point from the layer display in the map view and the corresponding products values will be displayed interactively.

3.9.5.11 Download timeseries

To download the time series, click on the “Download timeseries” button  present in the tool bar of the “Time series chart” window.




The time series will be saved in XLS format and automatically downloaded in the download directory of the browser.



A	B	C	D
DateTime	NDVI	Rain	Rain 10 day LT
1/1/2002 0:00	0.34	11.25	6.05
1/11/2002 0:00	0.31	13.81	8.38
1/21/2002 0:00	0.34	4.37	8.05
2/1/2002 0:00	0.33	0.62	6.12
2/11/2002 0:00	0.29	10.59	7.80
2/21/2002 0:00	0.26	3.72	8.78
3/1/2002 0:00	0.25	48.48	14.56
3/11/2002 0:00	0.29	19.57	21.84
3/21/2002 0:00	0.12	28.63	33.64
4/1/2002 0:00	0.31	20.46	30.13
4/11/2002 0:00	0.30	54.86	41.44
4/21/2002 0:00	0.36	32.98	37.50
5/1/2002 0:00	0.42	75.63	38.13
5/11/2002 0:00	0.45	17.41	24.51
5/21/2002 0:00	0.44	9.05	21.01
6/1/2002 0:00	0.41	11.33	16.05
6/11/2002 0:00	0.31	29.43	13.91
6/21/2002 0:00	0.33	10.55	11.43

3.9.5.12 Save graph as PNG image

To export a time series chart, click on the “PNG” button  present in the tool bar of the “Time series chart” window.




A snapshot of the chart will be made in PNG format and automatically saved in the download directory of the browser.

3.9.5.13 Graph template

In this new Climate Station version, the user has the possibility to save a graph as a template and manage a list of graph templates. The resulting template will keep the window size, the logo and disclaimer objects size and position, the chart and draw properties. There are two possibilities of saving a template: when it is a new graph or an existing one.

Like for the maps you **must be logged in** to have the possibility **to save your graph templates**.

- Save a new graph

When it is a new graph, the user can save the graph with the button  in the graph window toolbar.



A new window popup to type the name of the template as below:





The template will be saved in the template repository.


- Save an existing graph

If the graph exists already, the toolbar will show an extra button as below:



To just update the existing graph with the same name, click on the “Save » icon 


To use the display graph as template for further editing “Save as” icon  in the tool bar. Then a window will pop up to enter a new graph template name.

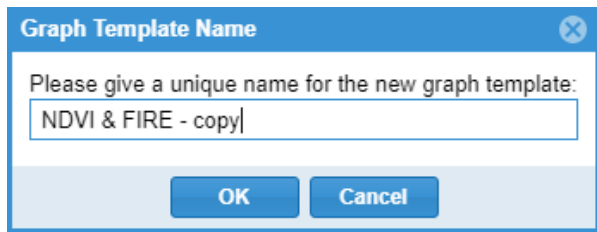



And will be saved in the graph template repository.

3.9.5.14 Manage the graph templates

Like for the maps there is now a specific repository for the different graph templates call “MY GRAPHS”.

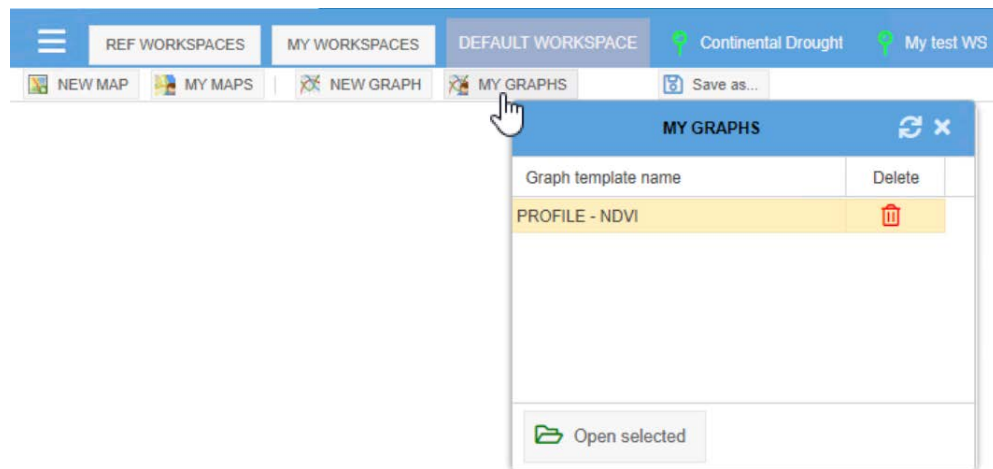

By selecting the line of interest, the user can

- load any existing template by using  in the current workspace
- or delete it from the repository with  icon.

3.10 FITNESS FOR PURPOSES

This page incorporates into the Station part of the features available in the Copernicus Climate Change Service (C3S) Fitness for Purpose (F4P) Benchmark Platform, developed by JRC as part of its activities in support of C3S⁷. Only some features of the original toolbox have been, integrated, since some others were already available under the Analysis page, and the remaining deemed as less relevant for the Station's Users.



Figure 25: Overview of the F4P page

3.10.1 Description of the available F4P methods

The F4P methods that are implemented in the Station are briefly described below:

- **Hovmöller Diagram:** is a commonly used way of plotting a large amount of climatic data in a meaningful and understandable form (Hovmöller, 1949). The axes of a Hovmöller diagram are typically longitude or latitude (ordinate or y-axis) and time (abscissa or x-axis) with the value of some field represented through color or shading. In general this diagram is great for displaying large amounts of data in a meaningful and understandable form.
- **Scatter Plot:** it is also named as Scatter Density Diagram, and it allows to highlight any potential bias tendency within data sets by means of a bi-dimensional density histogram comparison. This functions expects that only two datasets are selected (the selection is performed acting on the include checkbox, section 4). The computation can be also queried for temporal series, in this case a canvas is produced for every pair of dataset.

⁷ See for reference the dedicated, JRC Technical Report 114432-2019, available online at https://fapar.jrc.ec.europa.eu/_www/pubs.php#pubs_papers.

- **Trend Analysis:** this function takes as input the selected time-series of the selected product and computes the trend over the selected time period. The temporal extension is functional to the desired study and should be selected carefully. The presence of monotonic upward or downward is assessed using the non-parametric seasonal Kendall test.
- **Histogram and CDF:** This function allows to display both histograms and cumulative distribution functions CDFs of the selected samples. The figures are produced at monthly step, i.e. all the selected datasets which belong to the selected months are displayed in the same canvas. In the case that a `_reference_` dataset is indicated, the GUI performs and shows the Kolmogorov-Smirnov statistics is calculated with respect to it (Stephens, 1974). This latter is a nonparametric test of the equality of continuous, one-dimensional probability distributions that can be used to compare two samples. The null hypothesis (H_0) of this test is that the two samples are derived from the same common distribution. The test provides two indicators, the *KS-Statistic* and the corresponding *P-Value*. By definition, if the *KS-Statistic* term is small, meaning that the maximum distance of two CDFs is close to zero and the *P-Value* is higher than the significance level (assuming equal to 0.05), the evidence in support of H_0 is strong.
- **Gamma Index:** it is a quality estimator of the consistency between two distributions, in which one is taken as a `_reference_` and the other is the distribution to compare (to test) against. The selection of the reference can be performed explicitly via the dedicated switch or implicitly, in this latter case the reference distribution is calculated as the average distribution considering all the involved datasets, and the gamma index would express the consistency of the two distribution with respect their mean.

3.10.2 Running the F4P methods

The UI interface to access the F4P features on the Station is displayed in Figure 26. After selecting the type of analysis to perform, among the 5 available, the boxes for selection of the Product, Time and ROI are updated.

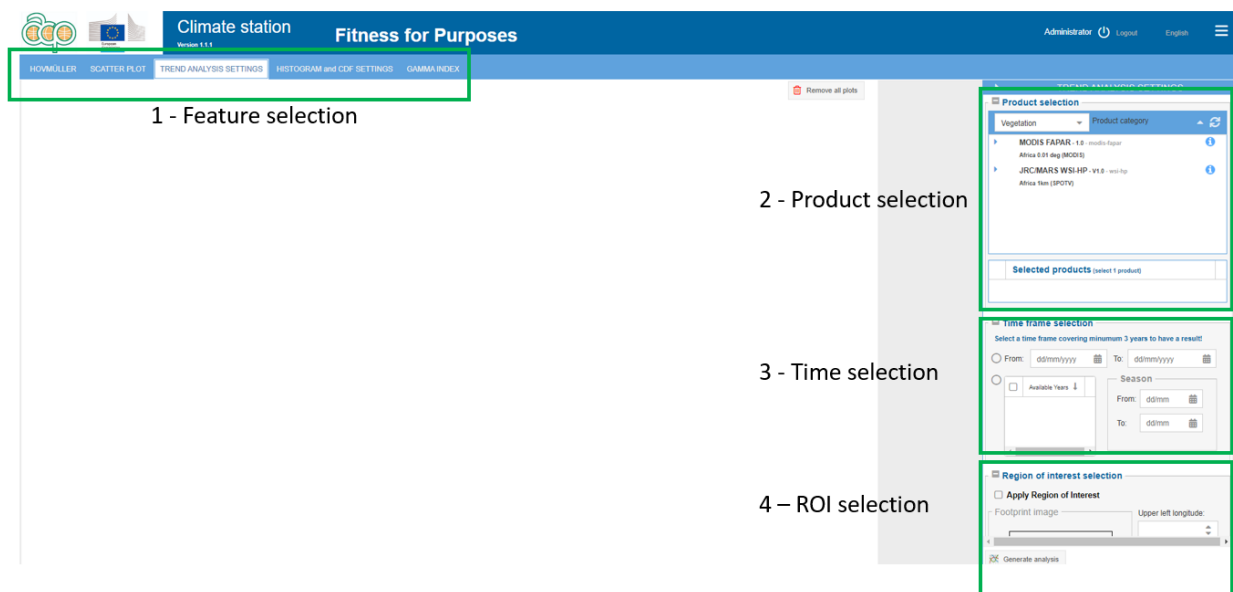


Figure 26: Procedure to create a F4P plot

Product Selection: the number of products that can be selected depends on the type of analysis, as displayed in the table below, in the second column. For the **Hovmöller** and **Trend Analysis**, a single product is processed at a time. For the **Scatter Plot** and the **gamma index**, two product are required and they need to have the same projection⁸. For **Histogram** and **CDF** two products can be selected, without any constraints on their mapset⁹

Type of Analysis	N. of Products	Constraints on Product Selection	Time Selection Options	Output Plots
Hovmöller	1	-	From-To Period 1+ Years (with Seasons)	Single Plot
Scatter Plot	2	The two products need to have the same grid (mapset)	Single date From-To Period 1+ Years (with Seasons)	1 Plot per Time
Trend Analysis	1	-	From-To Period 1+ Years (with Seasons))	Single Plot
Histogram and CDF	2	None	Single date From-To Period 1+ Years (with Seasons)	1 Plot per Time
Gamma Index	2	The two products need to have the same grid (mapset)	Single date From-To Period 1+ Years (with Seasons)	1 Plot per Time

⁸ Re-projection on the fly is not implemented in the current release of the station. Can be done in the Jupyter Notebooks environment.

⁹ Creation of the Histogram and CDF does not require pixel-to-pixel comparison.

Time Selection (and outputs): the options of selecting the time frame, and the number of output plots created, also depends on the type of analysis. This is reported in columns 4 and 5 of the table. For **Hovmöller** and **Trend Analysis**, the selected time period leads to the creation of a single graph. The time frame can be a single interval defined through a start and end-date, or a number of full years, or even a season defined over multiple years. For **Scatter Plot, Histogram and CDF**, and **Gamma Index**, a plot is created for each time selected. The selection of the times includes therefore the single data option as well.

ROI Selection: the F4P algorithms operates by default on the full extension of the datasets. The User can restrict the analysis to a sub-region (or region of interest) modifying the values presented in the corresponding box, and checking the 'Apply Region of Interest' box.

3.11 IMPACT TOOLBOX

High resolution Earth Observation imagery has been identified as a key source of information for mapping and monitoring land cover changes or degradation over time. However, data extraction, layer stacking, radiometric calibration, normalization, mosaicking, automatic classification and segmentation are only some of the pre-processing steps that a user has to undertake to obtain a basic land cover map.

IMPACT Toolbox offers a combination of remote sensing, photo interpretation and processing technologies in an easy to use WEB-GIS environment, allowing non specialist users to easily accomplish all necessary pre-processing steps while giving a fast and user-friendly environment for visual editing and map validation.

The rationale for this development has been the strong link between the JRC projects to monitoring tropical forests (TREES, FOROBS, ReCaREDD, and REDD-Copernicus) in collaboration with the forest national services.

Originally developed as a portable Windows application, IMPACT has been recently integrated into the Station (in a dedicated Docker container) offering multi-OS support and direct access to datasets automatically retrieved by the latter. Figure 27 represent the link between the two systems, with IMPACT working on the data locally retrieved by the station.

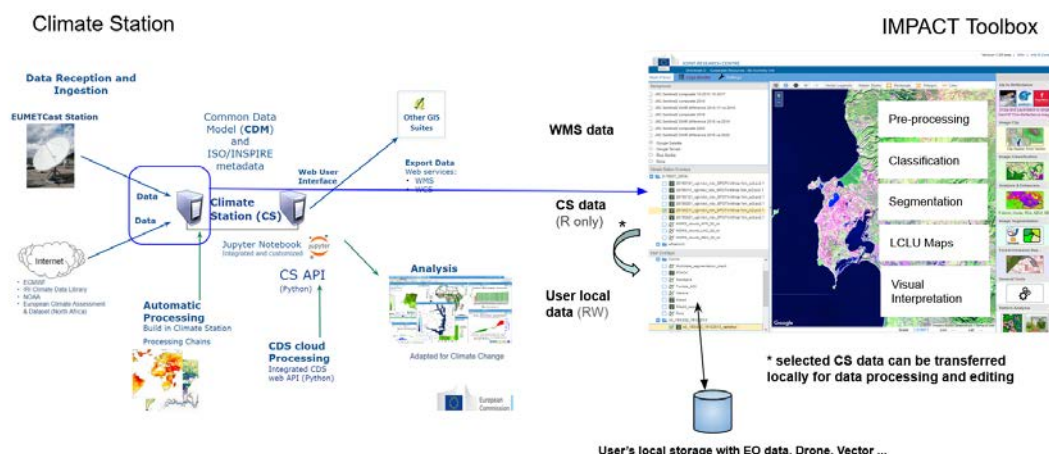



Figure 27 : view of the logical link between the Station and IMPACT

The IMPACT web-interface mimics the classic and well known GIS software offering a central panel containing background maps and user overlays, a left panel with access to local and remote (e.g. the Station) raster and vector layers and a right panel with a set of processing modules spanning from automatic ingestion of raw (i.e. zipped) Landsat 4-5-7-8-9, Sentinel-2 and Rapid Eye imagery to image classification, segmentation, zonal statistics, morphological pattern analysis, forest degradation detection and carbon emission reporting. It is worth mentioning advanced tools for raster and vector editing and label assignment, key steps in the land cover/land use change mapping activities as well as in ground truth collection activities.



Figure 28: Map Visualization & Editing features

Figure 28 and Figure 29 represent some of the features available in IMPACT for the visualization and editing features of a map and the editing of ground-truth collected data, respectively.

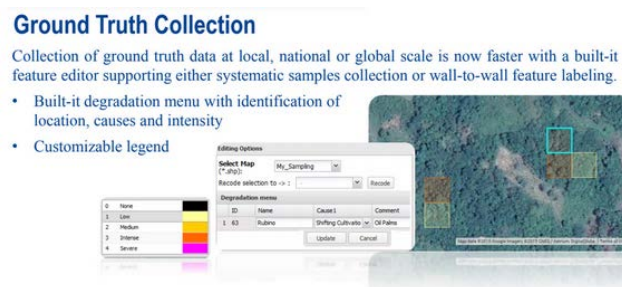

More information, user manual and test cases are available at:

<https://forobs.jrc.ec.europa.eu/products/software/impact.php>

3.12 JUPYTER NOTEBOOKS

The main objective of the Jupyter notebooks in the Station is to give the flexibility for the user to exploit its power to customize the visualization as needed, derive indicators of its choice using the available libraries, create the chains of processing to derived multiple variables and also more customized way of using IMPACT toolbox, Analysis tool, Fitness for purpose tool.

The usage diagram is shown in Figure 27, which highlights the components of the Station can be accessed through the Notebooks: as you can see, they are not suggested for Acquisition, which we propose to exploit only through the Station services. On top of scientific work, one can use the Jupyter notebooks to create reports and bulletins with texts and graphs, which can be shared with others for visualization.

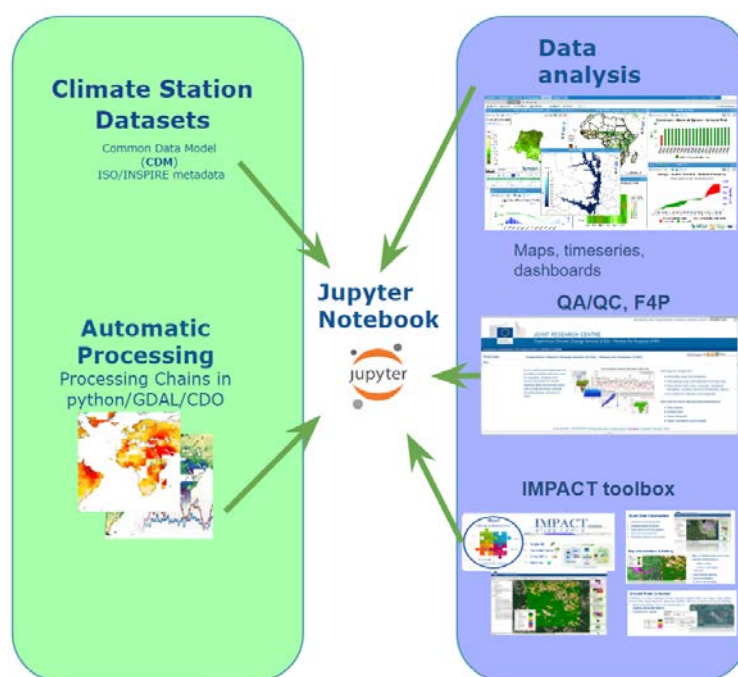


Figure 29: Jupyter Notebook usage in the Station

In the notebook you can make use of Python 3 kernel, Python 3 console, command line terminal, text file, markdown file and python file as a notebook. We also provide pre-cooked notebooks which can be used by the user.


Some of the python classes available in the station which are used for visualization, processing etc. are as follows:

1. Collections: list the datasets and perform sub setting.
2. Products: Collection of specific datasets for various sub products and extent and resolution.
3. Datasets: Ensemble of images related to the same EO products, for a given geographic extent and temporal window.
4. Proc: access to the processing procedures that are coded in the Station and used by the 'Processing' service.

3.13 HELP

The Help page gives the user access to the user documentation, e.g. this 'User Manual', and Product descriptions.

In addition, some links to useful web sites and specific Notes documentation are available on the Help page.

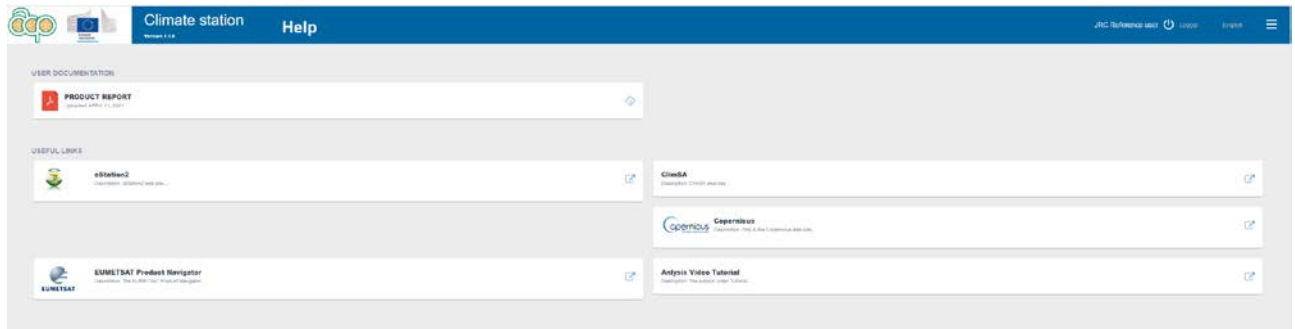

Clicking on a User document or Note will open the file in a new browser tab.

Clicking on a Useful link will open the link in a new browser tab.

4. REFERENCE GUIDE (ADVANCED USERS)

The current chapter provides more insights on the functioning of the Climate Station, and it is especially meant for Advanced Users aiming at strongly customize the application, e.g., for generating additional derived products.

4.1 DETAIL OF SERVICES

As explained in section 2.1, the Climate Station is mainly an EO and Climate data processor, and three main types of Services exist for processing data: the data retrieval (or 'Get' services), the format conversion ('Ingestion' service) and the generation of derived products ('Processing' service).

For each service we describe in the current section what is its role and goal (*'What it does'*), its functioning mechanism (*'How it works'*) and how its configuration is managed (*'Configuration'*). The last part refers to the database tables containing the settings related to the service. An additional paragraph (*'References'*) contains specific references to the filesystem components (input and directories, temporary working repositories, lock files and so on) managed by the service.

As already mentioned in section 2.4.7, there are two distinct services for retrieving external datasets on the Climate Station, from the EUMETCAST receiving Station (Get EUMETCast) and from remote servers (Get Internet). They have some commonalities, being the latter slightly more complex for the need of accessing various and different directories structures.

4.1.1 Get EUMETCast Service

What it does

The service copies files that are made available by Tellicast and FTS services in a directory of EUMETCAST receiving Station, which is accessed through ftp by Climate Station. This is a 'pull' approach and it does not take care of the house-keeping of the files in the original directory (see Figure 21)

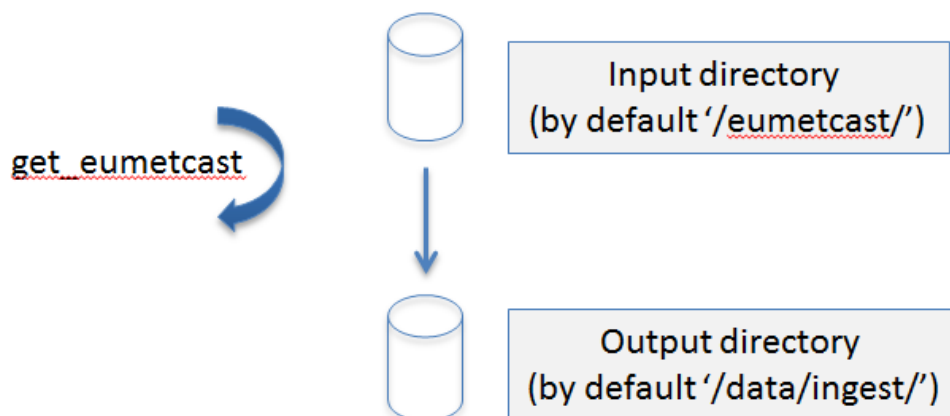


Figure 30: Get EUMETCast Service

As anticipated in paragraph 2.4, a location containing files belonging to the same EO and Climate product is defined as a 'data source'. The 'data sources' are processed independently from each other, and they can be activated/deactivated while the Service is running, so that they are taken into consideration at the next process cycle without need of a re-start.

How it works

The service should also ensure that a file in the input directory is copied to the output directory only once, and not continuously overwritten; therefore, a list¹⁰ of the already copied files is created and maintained for each of the data sources. Note that the files removed from the input directory are also removed from the list

¹⁰ This file is called 'get_eumetcast_processed_lists'.

and, consequently, if a file is re-disseminated after having been deleted from input dir¹¹, it will be copied again by the Service.

The overall organization of the Get EUMETCast service can be represented as below:

Loop over all active EUMETCast data sources and, for each of them:

- Create a list of files in input directory that match the EUMETCast source (i.e. a regular expression¹²).
- Generate list of files to be copied, i.e. the existing ones not yet copied.
- For each of the files to be copied:
 - Copy from 'input' to 'output' directory
 - Add the file to the list of copied files
- Check if all files in the list still exists in the filesystem (and clean the list accordingly)
- Save the list

Configuration

The Service is configured and controlled by two tables in the postgresql database (see also Chapter 4 of the Administration Manual).

The *eumetcast_source* table contains the description of all products disseminated by EUMETCast: Figure 22 displays a subset of the table, including the columns *eumetcast_id* (used to identify uniquely the source) and the *filter_expression_jrc*, used for associating the source the input files.

	eumetcast_id [PK] character varying	filter_expression_jrc character varying	collection_name character varying	status: Internal_Identifier boole character varying
1	EO:EUM:DAT:MSG:MSG:W:ABBA	''	MSG Active Fires - Africa	FALSE EO:EUM:DAT:MSG:MSG:W:ABBA
2	EO:EUM:DAT:NWP:MODEL:RETIM	''	M??t??o-France RETIM	FALSE EO:EUM:DAT:NWP:MODEL:RETIM
3	EO:EUM:DAT:MULT:MODIS:TC	''	MODIS True Colour Image - Multimission	FALSE EO:EUM:DAT:MULT:MODIS:TC
4	EO:EUM:DAT:MULT:MODIS:LFDI	''	Lowveld Fire Danger Index - Multimission	FALSE EO:EUM:DAT:MULT:MODIS:LFDI
5	EO:EUM:DAT:MULT:DWDSAT	''	DWDSAT	FALSE EO:EUM:DAT:MULT:DWDSAT
6	EO:EUM:DAT:FENGYUN:PREO	''	Precipitation Estimation Product - 1 & 3	FALSE EO:EUM:DAT:FENGYUN:PREO
7	EO:EUM:DAT:FENGYUN:DMG	''	Dust Monitoring - FengYun 2E	FALSE EO:EUM:DAT:FENGYUN:DMG
8	EO:EUM:DAT:MULT:MODIS:BA	''	MODIS Burned Area product - Multimission	FALSE EO:EUM:DAT:MULT:MODIS:BA
9	EO:EUM:DAT:METOP:MGR-SST	20130521121903-OSISAF-L2P GHRSSST-SSTsubs	Full Resolution Sea Surface Temperature	FALSE EO:EUM:DAT:METOP:MGR-SST
10	EO:EUM:DAT:MULT:AOCM	8a-super.gif,	Animated Ozone Contour Map	FALSE EO:EUM:DAT:MULT:AOCM
11	EO:EUM:DAT:NWP:MODEL:ECGTS	A HRXE70ECMF090000 C ECMF 20120809000000	ECMWF NWP data for the GTS (essential an	FALSE EO:EUM:DAT:NWP:MODEL:ECGTS
12	EO:EUM:DAT:NWP:MODEL:ECACMAD	A HVXE92ECMF090000 C ECMF 20120809000000	ECMWF NWP data for ACMAD members - NWP M	FALSE EO:EUM:DAT:NWP:MODEL:ECACMAD
13	EO:EUM:DAT:AQUA:CHLORA	A.*L3m DAY CHL chlor a 4km.bz2	Chlorophyll Alpha (MODIS, Mapped 4km) -	FALSE EO:EUM:DAT:AQUA:CHLORA
14	EO:EUM:DAT:MULT:AGRICMASK	AMESD SADC AGRIC MASK 20100901 Safri v1.	Agriculture Mask - Multimission - Southe	FALSE EO:EUM:DAT:MULT:AGRICMASK
15	EO:EUM:DAT:MODEL:RAIN:FCST	AMESD SADC augMM.ndjRAIN AN.fcst.txt,	Seasonal Rainfall Forecast (LRF01) - Mod	FALSE EO:EUM:DAT:MODEL:RAIN:FCST
16	EO:EUM:DAT:MODEL:TN:FCST	AMESD SADC augMM.ndjTN AN.fcst.txt,	Seasonal Minimum Temperature Forecast (L	FALSE EO:EUM:DAT:MODEL:TN:FCST

Figure 31: *eumetcast_source* table.

A specific EUMETCast source is associated to a Station product through the *product_acquisition_data_source*, which is displayed in Figure 23. In order to uniquely identify the native subproduct, the triplet *product/subproduct/version* is specified in the table. Note also that this table is common between the two 'get' services (EUMETCast and Internet).

¹¹ Retention time of input directory is normally 1 week.

¹² A 'regular expression' (see https://en.wikipedia.org/wiki/Regular_expression) is a string containing characters that can match several strings, e.g. several similar filenames.

Edit Data - eStation2DB (localhost:5432) - estationdb - products.product_acquisition_data_source									
	productcode [PK] character	subproductcode [PK] character varying	version [PK] character	data_source_id [PK] character varying	defined_by character	type character	activated boolean	store_origi boolean	
1	fewsnet rfe	fewsnet rfe native	undefined	USGS:EARLWRN:FEWSNET	JRC	INTERNET	TRUE	FALSE	
2	lsasaf lst	lsasaf lst native	undefined	EO:EUM:DAT:MSG:LST-SEVIRI	JRC	EUMETCAST	TRUE	FALSE	
3	modis ba	modis ba native	undefined	UMD:MCD45A1:HDF:51	JRC	INTERNET	TRUE	FALSE	
4	modis ba	modis ba native	undefined	UMD:MCD45A1:TIF:51	JRC	INTERNET	TRUE	FALSE	
5	modis chla	modis chla native	undefined	EO:EUM:DAT:AQUA:CHLORA	JRC	EUMETCAST	TRUE	FALSE	
6	modis firms	modis firms native	undefined	USGS:FIRMS	JRC	INTERNET	FALSE	FALSE	
7	modis sst	modis sst native	undefined	GSFC:OCEAN:MODIS:SST:8D	JRC	INTERNET	FALSE	FALSE	
8	msg mpe	msg mpe native	undefined	EO:EUM:DAT:MSG:MPE-GRIB	JRC	EUMETCAST	TRUE	FALSE	
9	pml modis chl	pml modis chl native	undefined	EO:EUM:DAT:MULT:CPMAD	JRC	EUMETCAST	TRUE	FALSE	
10	tamsat rfe	tamsat rfe native	undefined	EO:EUM:DAT:MSG:RFE	JRC	EUMETCAST	TRUE	FALSE	
11	vgt fapar	vgt fapar native	V1.3	EO:EUM:DAT:PROBA-V:FAPAR	JRC	EUMETCAST	TRUE	FALSE	
12	vgt ndvi	vgt ndvi native	undefined	EO:EUM:DAT:SPOT:S10NDVI	JRC	EUMETCAST	FALSE	FALSE	

Figure 32: product acquisition datasource table

The configuration of the Get EUMETCast Service consists in two main steps:

1. Defining (modifying/adding) the sources in *eumetcast_source* table.
2. Associating the source to the products in the *product_acquisition_data_source* table.
3. Activating/Deactivating the single source in the *product_acquisition_data_source* table.

The first two steps are pre-set in the Climate Station by JRC for all the products proposed to the Users, and need to be done only for additional products (Advanced Users). The activation/deactivation might be modified by the User according to its thematic needs and some specific operational constrains. The procedure for performing these operations through the GUI is described in Section 3.

References

Table 4 contains all the elements in the filesystem, both files and directories, that are relevant for the Service implementation, and is meant as a Reference for advanced Users.

Element	Directory	File	Example/Default	Description
Input Dir	/eumetcast/	-	-	Input directory of the service.
Output Dir	/data/ingest/	-	-	Output directory of the service.
Process	<BASE_DIR ¹³ >/Climate Station/apps/acquisition/	get_eumetcast_py	-	Python module that implements the Service.
Process pid file	/tmp/Climate Station/services/	get-eumetcast.pid	-	Stores the pid ¹⁴ of the service.
Processed list	/Climate Station/get_lists/get_eumetcast/	get_eum_processed_list_<source_id>.list	get_eum_processed_list_EO:EUM:DAT:MSG:MPE-GRIB.list	List of the files already copied for a specific source.

¹³ The base directory of the eStation installation.

¹⁴ Process Identifier, a unique integer number associated to the Linux process.

Ancillary Info	/Climate Station/get_lists/get_ eumetcast/	get_eum_processed_list_ <source_id>.info	get_eum_processed_list_ EO:EUM:DAT:MSG:MPE- GRIB.info	Information on the execution of the Service for the specific source (displayed in the GUI).
----------------	--	---	---	--

Table 3: Filesystem elements relevant for Get EUMETCast service

4.1.2 Get Internet

What it does

The service copies files available on remote ftp/http serves to the local machine, into a directory that is by default the input directory of the ingestion service.

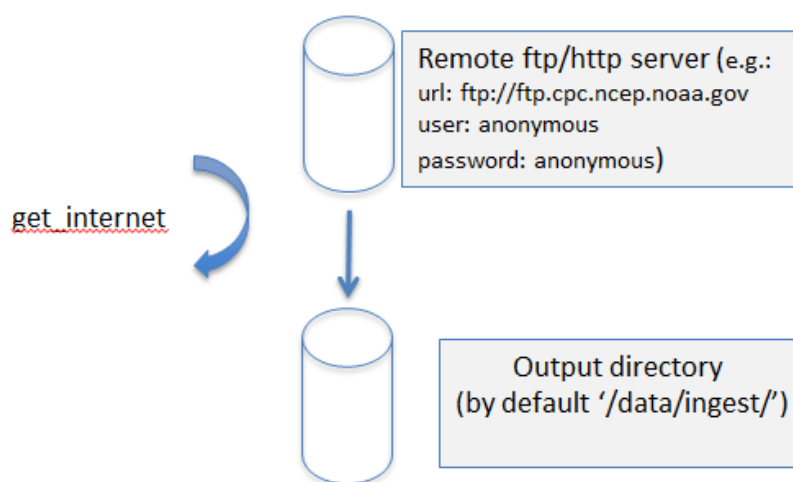


Figure 33: Get Internet Service

This service is similar to Get EUMETCast, for the principle of having different ‘data sources’ for the various datasets, and for keeping a list of the already copied files. Some differences exist for the need of specifying more elements to access the remote server, and to take account of the directory and file naming and organization.

How it works

The main differences in the mechanism of the Get Internet Service with respect to the Get Internet are:

1. In addition to the location of the remote files (a URL address), user credentials have to be provided (username and password).
2. On the remote server a complex directory structure can exist (see examples below).
3. Unlike for the Near Real Time (NRT) dissemination of EUMETCast, a full collection of data normally exists on the remote server, which potentially covers a large time-window; therefore time sub-setting has normally to be considered.

Note also that when a file is removed from the remote source, its name is not removed from the list of the processed file. As a consequence, files removed and re-inserted on the remote server are not downloaded a second time: the only option for re-downloading files is to manually clean the processed list.

The overall process for the Get Internet service is described below:

Loop over active Internet sources

- Create a list of files on the remote server that match the internet source definition (either type 1 or 2).
- Compute list of files to be copied, i.e. the ones available but not yet copied
- For each file to be copied:
 - Download the file to the local target dir.
 - Add the file to the list
- Save the list

Configuration

The Get Internet service takes into account the existence of both ftp servers, whose directory tree can be 'navigated' to search for the requested files, and http servers, where the exact location and naming of the files has to be known in advance. The two cases are described separately hereafter.

Type 1: ftp servers

Let's start from an example and consider the NOAA ftp server at the address <ftp://ftp.cpc.ncep.noaa.gov>, which is possibly a very rich and articulated site we access for retrieving, e.g., the CMORPH V 1.0 dataset. The specific dataset we are interested in (8 km resolution, 30 minute repeat cycle raw data) is located under the directory:

`ftp://ftp.cpc.ncep.noaa.gov/precip/CMORPH_V1.0/RAW/8km-30min/`

This address is therefore the starting point of our search in the server: as displayed in Figure 25, data are organized in subdirectories named after the year. The filename is like `CMORPH_V1.0_8km-30min_201103.tar`.

Index of /precip/CMORPH_V1.0/RAW/8km-30min/




















Name	Size	Date Modified
 [parent directory]		
 1998/		4/24/13, 12:00:00 AM
 1999/		4/24/13, 12:00:00 AM
 2000/		4/24/13, 12:00:00 AM
 2001/		4/24/13, 12:00:00 AM
 2002/		4/24/13, 12:00:00 AM
 2003/		4/9/13, 12:00:00 AM
 2004/		4/9/13, 12:00:00 AM
 2005/		4/9/13, 12:00:00 AM
 2006/		12/3/13, 12:00:00 AM
 2007/		4/1/13, 12:00:00 AM
 2008/		12/3/13, 12:00:00 AM
 2009/		5/15/13, 12:00:00 AM
 2010/		5/30/13, 12:00:00 AM
 2011/		12/3/13, 12:00:00 AM
 2012/		7/1/13, 12:00:00 AM
 2013/		1/31/14, 12:00:00 AM
 2014/		4/1/15, 2:06:00 PM
 2015/		4/1/15, 2:06:00 PM

Figure 34: Example of ftp server (CMORPH dataset)

The idea is to identify the files to be downloaded through a regular expression, composed by two parts:

- A fixed prefix that represent the starting point of the search. It is called 'url' and in our example is:

`url = ftp://ftp.cpc.ncep.noaa.gov/precip/CMORPH_V1.0/RAW/8km-30min/`

- A variable part for identifying all subdirectories and filenames we are interested in. In our example is:

include_files_expression = [12][0-9][0-9][0-9]/CMORPH_V1.0.*

Note that the part '[12][0-9][0-9][0-9]/' corresponds to the 'year' subdirectory, and CMORPH_V1.0.* matches all files, regardless to their date.

These two variables are sufficient to define the 'internet source' for the ftp servers.

Type 2: http servers

Unlike for the ftp servers, on the http servers there might be restrictions in reading the contents of a directory, so that it is possible to access and download a given file, but not to 'walk' the directory tree down to that file. Consider as an example the Ocean Colour datasets distributed by GSFC-NASA at the address <http://oceandata.sci.gsfc.nasa.gov/cgi/getfile/>: entering in a browser this address the remote directory is not displayed, while it is possible to download the files by indicating the full name, e.g.:

http://oceandata.sci.gsfc.nasa.gov/cgi/getfile/A2015048.L3m_DAY_CHL_chlor_a_4km.bz2

As a consequence, we cannot read the contents of the remote directories and match it with some regular expression; the full filename has instead to be known in advance, including the variable part related to the observation date. The approach adopted for the http servers is therefore slightly more complicated than for the ftp servers, and is based on 3 elements, as described below.

- A fixed 'url' is provided as the initial part of the URL address, e.g.:

url = http://oceandata.sci.gsfc.nasa.gov/cgi/getfile/

- A 'template' is provided to define the remaining part of the path (subdirectories and filename), which depends on the date. This part is still called 'include_files_expression', as for ftp servers, but its definition is different. It is not anymore a 'regular expression', rather a template containing %*type* elements that represents part of a date field (e.g. year, month, day of the month), and for the CHL source of our example will be:

include_files_expression = A%Y%j.L3m_DAY_CHL_chlor_a_4km.bz2

Note that the same notation as in UNIX *date* function is adopted¹⁵ : in the following table we reproduce the format fields most commonly used:

Format	Description	Example
%Y	4-digit year	2015
%m	2-digit month	12
%d	2-digit day of	01
%H	2-digit hour	23
%M	2-digit minute	59

¹⁵ See e.g. <http://www.cyberciti.biz/faq/linux-unix-formatting-dates-for-display/>

%j	3-digit day-of-year (from 1 to 366)	121
%{dkm} ¹⁶	1 digit dekad of month	1,2 or 3

Table 4: Date formats

- Three fields are defined to define all dates in a given period, namely:
 - start_date, end_date of the period
 - frequency, i.e. the repeat cycle of the product (every day, every 30 minute)

On the basis of the 'start_date', 'end_date' and frequency, all possible dates are computed and for each of them the corresponding filename is derived by using the expression defined through the *include_file_expression*. This filename is added to the initial path specified at point a, in order to have the full path.

Configuration

The Service is configured and controlled by two tables in the postgresql database (see also chapter 4 of the Administrator Manual). The 'internet_source' table contains the information necessary to identify the remote source and the files to be retrieved from it; in Table 6 a description of the columns relevant for the current discussion is provided.

¹⁶ This format is a specific implementation on the eStation, and represent the 'decade' in the range 1..36.

Column	Description	Example/List
internet_id	Unique Identifier, user defined	GSFC:CGI:MODIS:CHLA:1D
defined by	Who has defined the field (either JRC or the user)	JRC
descriptive Name	A descriptive name to identify the source	MODIS 4km Chla Daily
description	A (possibly more detailed) description	MODIS 4km Chla Daily
url	Url address of the ftp or http server. It includes the 'fixed' part of the full path.	http://oceandata.sci.gsfc.nasa.gov/cgi/getfile/ ftp://ftp.cpc.ncep.noaa.gov
username	User name for server access	anonymous
password	Password	anonymous
type	Type of server to be accessed (ftp or http)	ftp: type 1 above http_tmpl: type 2
include_filter_expression	Expression to match the variable part of the full path. It is a 'regular expression' for ftp servers and a 'template' for http ones.	A%Y%j.L3m_DAY_CHL_chlor_a_4km.bz2
files_filter_expression	Expression for matching the downloaded files in the ingestion phase. It is always a regular expression (also for the http) and refers only to the filename (not subdirectories).	.*.L3m_DAY_CHL_chlor_a_4km.bz2
status	Status of activation of the source: it should always be on, unless the source is obsolete or still under test. Note that the activation of the get for the source is done in pads table.	True
pull_frequency		
frequency	The string identifying the repeat cycle (or frequency) of the dataset to be retrieved. It applies only to http server.	e1dekad (i.e. every 'dekad') e1month (i.e. every month)
start_date	Start date of the period to be considered, in format YYYYMMDD. It applies only to http server.	20150101
end_date	End date of the period to be considered, in format YYYYMMDD. It applies only to http server.	20150631

Table 5: Contents of Internet source table (partial)

One, or more, specific sources can be associated to a 'native' subproduct through the 'product acquisition data table', which is displayed in Figure 23. Note that the table is common between the two 'get' services.

Edit Data - eStation2DB (localhost:5432) - estationdb - products.product_acquisition_data_source								
	productcode [PK] character	subproductcode [PK] character varying	version [PK] chara	data_source_id [PK] character varying	defined_by character	type character	activated boolean	store_orig boolean
1	fewsnet rfe	fewsnet rfe native	undefined	USGS:EARLWRN:FEWSNET	JRC	INTERNET	TRUE	FALSE
2	lsasaf lst	lsasaf lst native	undefined	EO:EUM:DAT:MSG:LST-SEVIRI	JRC	EUMETCAST	TRUE	FALSE
3	modis ba	modis ba native	undefined	UMD:MCD45A1:HDF:51	JRC	INTERNET	TRUE	FALSE
4	modis ba	modis ba native	undefined	UMD:MCD45A1:TIF:51	JRC	INTERNET	TRUE	FALSE
5	modis chla	modis chla native	undefined	EO:EUM:DAT:AQUA:CHLORA	JRC	EUMETCAST	TRUE	FALSE
6	modis firms	modis firms native	undefined	USGS:FIRMS	JRC	INTERNET	FALSE	FALSE
7	modis sst	modis sst native	undefined	GSFC:OCEAN:MODIS:SST:8D	JRC	INTERNET	FALSE	FALSE
8	msg mpe	msg mpe native	undefined	EO:EUM:DAT:MSG:MPE-GRIB	JRC	EUMETCAST	TRUE	FALSE
9	pml modis chl	pml modis chl native	undefined	EO:EUM:DAT:MULT:CPMAD	JRC	EUMETCAST	TRUE	FALSE
10	tamsat rfe	tamsat rfe native	undefined	EO:EUM:DAT:MSG:RFE	JRC	EUMETCAST	TRUE	FALSE
11	vgt fapar	vgt fapar native	V1.3	EO:EUM:DAT:PROBA-V:FAPAR	JRC	EUMETCAST	TRUE	FALSE
12	vgt ndvi	vgt ndvi native	undefined	EO:EUM:DAT:SPOT:S10NDVI	JRC	EUMETCAST	FALSE	FALSE

Figure 35: product acquisition datasource table

References

Table 7 contains all the elements in the filesystem, both files and directories, that are relevant for the Service implementation, and is meant as a Reference for advanced Users.

Element	Directory	File	Example/Default	Description
Input Dir	/eumetcast/	-	-	Input directory of the service
Output Dir	/data/ingest/	-	-	Output directory of the service
Process	<BASE_DIR>/Climate Station/apps/acquisition/	get_eumetcast_py	/srv/www/Climate Station/apps/acquisition/get_eumetcast.py	Python module in charge of the service
Process pid file	/tmp/Climate Station/services /	get-eumetcast.pid		Stores the pid ¹⁷ of the service.
Processed_list	/Climate Station/get_lists/get_eumetcasts/	get_eum_processed_list_<source_id>.list	get_eum_processed_list_EO:EUM:DAT:MSG:MPE-GRIB.list	
Ancillary Info	/Climate Station/get_lists/get_eumetcasts/	get_eum_processed_list_<source_id>.info	get_eum_processed_list_EO:EUM:DAT:MSG:MPE-GRIB.info	

Table 6: Filesystem elements relevant for get_eumetcast service

¹⁷ Process Identifier, a unique integer number associated to the Linux process.

4.1.3 Data Store Service

What it does

The service copies files available on CDS & IRI climate library to the local machine based on the configuration files which are added by the user (predefined files by JRC) understanding the data retrieval mechanism from the CDS and IRI portal. For CDS, configurations taken from the API request within their dataset retrieval portal whereas for IRI data library, configurations taken from the expert mode of specific datasets from their portal. On top of coping the files it also ingest them directly as netcdf file based on the pre-process type defined. In some case it just assign the metadata and move the file to appropriate locations.

How it works

The main differences in the mechanism of the Data Store Service with respect to the Get Internet are:

- Get Internet just download the data in /data/ingest folder whereas Data Store service also ingest them
- Another main difference is Data Store service ingest the data as NetCDF file

The overall process for the Data Store service is described below:

Loop over active datastore sources

- Create a jobs based on the configuration available for the specific datasource
- Once the jobs are processed by the portal (In case IRI data library data is downloaded instantly) it downloads the data
- The downloaded files are ingested in the similar way described in Ingestion service
- Save the list of downloaded files

Figure 27 gives the detailed process of data flow within the DataStore service

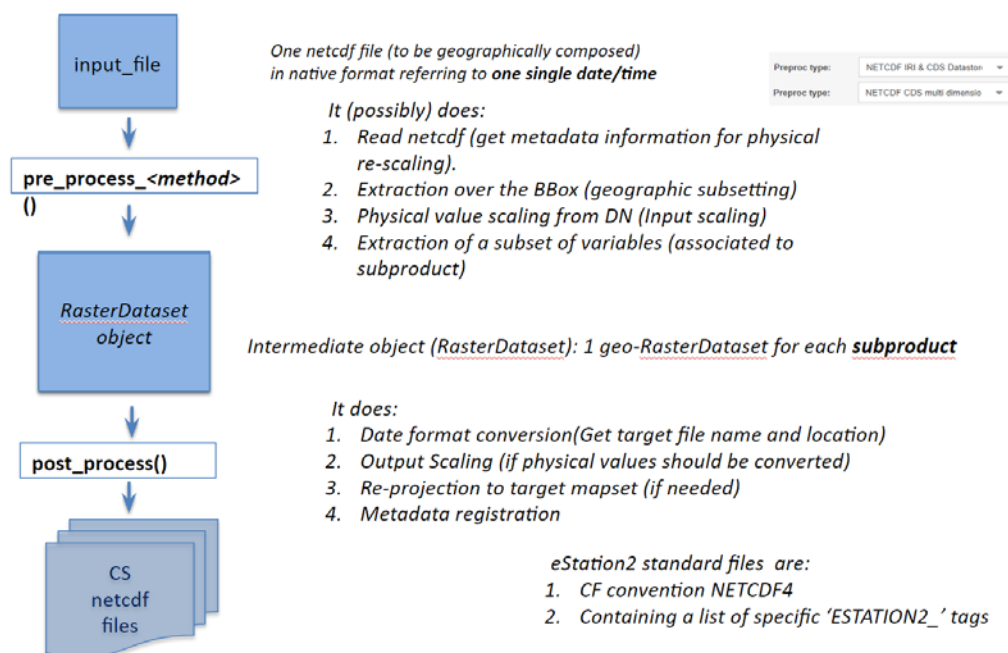


Figure 36: Datastore data flow

Configuration

The two cases are described separately here.

Type 1: CDS

The configuration from the CDS are converted to configuration file with the name of the datasource ID and loaded into the folder /data/static_data/config_cds/.

In the Figure 28 you will how configurations are transformed in the CS config file. Later this config files are processed by filling the year, month, day & time and jobs are created to retrieve the data

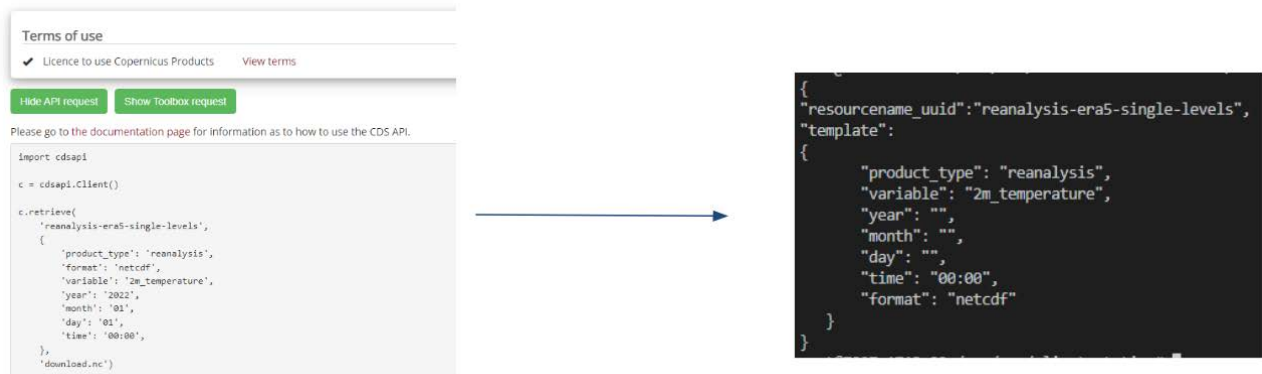


Figure 37: Example of ERA5 configuration transformed into configuration file in Climate Station

Type 2: IRI data library

The IRI data library expert mode configurations of specific dataset is converted to the configuration file in the CS as shown in Figure 29. The time range is alone processed from the Datastore service and feed into the config file to process the data

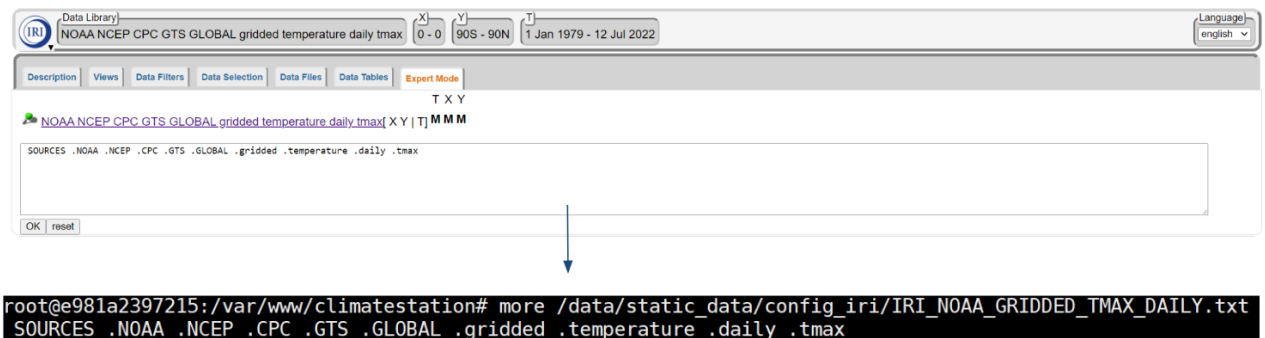


Figure 38: Example of GTS Tmax configuration from IRI transformed into configuration file in Climate Station

4.1.4 Ingestion Service

What it does

The main goal of the ingestion Service is to extract from the retrieved files the *subproducts* needed by the thematic User, for the specific *mapsets* he has defined. These *subproducts* are therefore stored in the standard Climate Station format (GTIFF containing specific tags), and ready on the system for visualization and further processing.

The complexity of the ingestion service, with respect to the *Get* services, relies, a part from the geo-processing of various formats, on the fact that several *subproducts* can be extracted from the same files, and

for more than one *mapset*. Furthermore, the same *product* might have been retrieved from different *sources* (e.g. EUMETCast and Internet, or different internet servers), having each source a different file naming and format.

How it works

To deal with the above described complexity, the overall service is organized in two main steps:

- Identify the files from a *source* to be processed for a specific *product*.
- Process the files to extract the *subproducts* for the defined *mapset* (or *mapsets*).

Step 1: select the files for a product/source

The overall mechanism of the ingestion loop is described in Figure 30. Its role is to select a list of files existing in the input directory to be passed to a specific routine that extracts from them the defined *subproducts* for the active *mapsets*.

As first action, the list of all *products* whose ingestion is active (see also Figure 9) is created. For each of them, the *sources* it has been retrieved from are identifying, and each *source* is treated separately, as the files coming from the various sources of the same product might be in a different format, or at least have a different filename.

Once a *source* is selected, it is possible to identify in the input directory all the files retrieved from that source, and to group them by date¹⁸. These files can subsequently be treated in order to extract from them one or more *subproducts*, for one or more *mapsets*.



Figure 39: Ingestion Service structure

¹⁸ For each date, one or more file can exist, depending on the policy adopted by the data provider. In same case, namely the low resolution products, a single file exist, having continental or global coverage. With higher spatial resolutions, the information is stored in various files, also known as tiles or regions.

Step 2: process the files to extract subproducts

A single file, or a list of files covering adjacent geographic areas, are passed to a routine to process them and extract the numerical value to be converted into physical values and stored in Climate Station format. Each of the file can be in various file format (e.g. GTIFF, HDF4, HDF5, netcdf, HRIT, grib) and can contain one or more layers. The operations performed in this step are listed in Figure 31.

A *pre-processing* is applied in order to have, as intermediate step, a set of GTIFF and geo-referenced files containing a single *subproduct*. According to the *native* format, the series of performed operation is different. In the most general case, the *pre-processing* does the following:

- Unzip the files (from .gzip, .tgz, .bz2)
- Extract the physical values for each subproduct, and do mosaicking
- Write the values in a GTIFF format
- Geo-reference the file.

This pre-processing highly depends on the nature of the input files: a set of pre-processing routines are defined in order to deal with the most common cases.

Once the intermediate files are generated in a temporary working space, the generation of the Climate Station standard files is performed by:

- Converting the digital numbers to physical values, and convert back to digital number with a standard convention (see 2.4).
- Apply the geographic clipping/re-projection to generate the output with the defined *mapset* (i.e. for a specific boundary box and projection)
- Write to the files the Climate Station metadata (see 2.4)

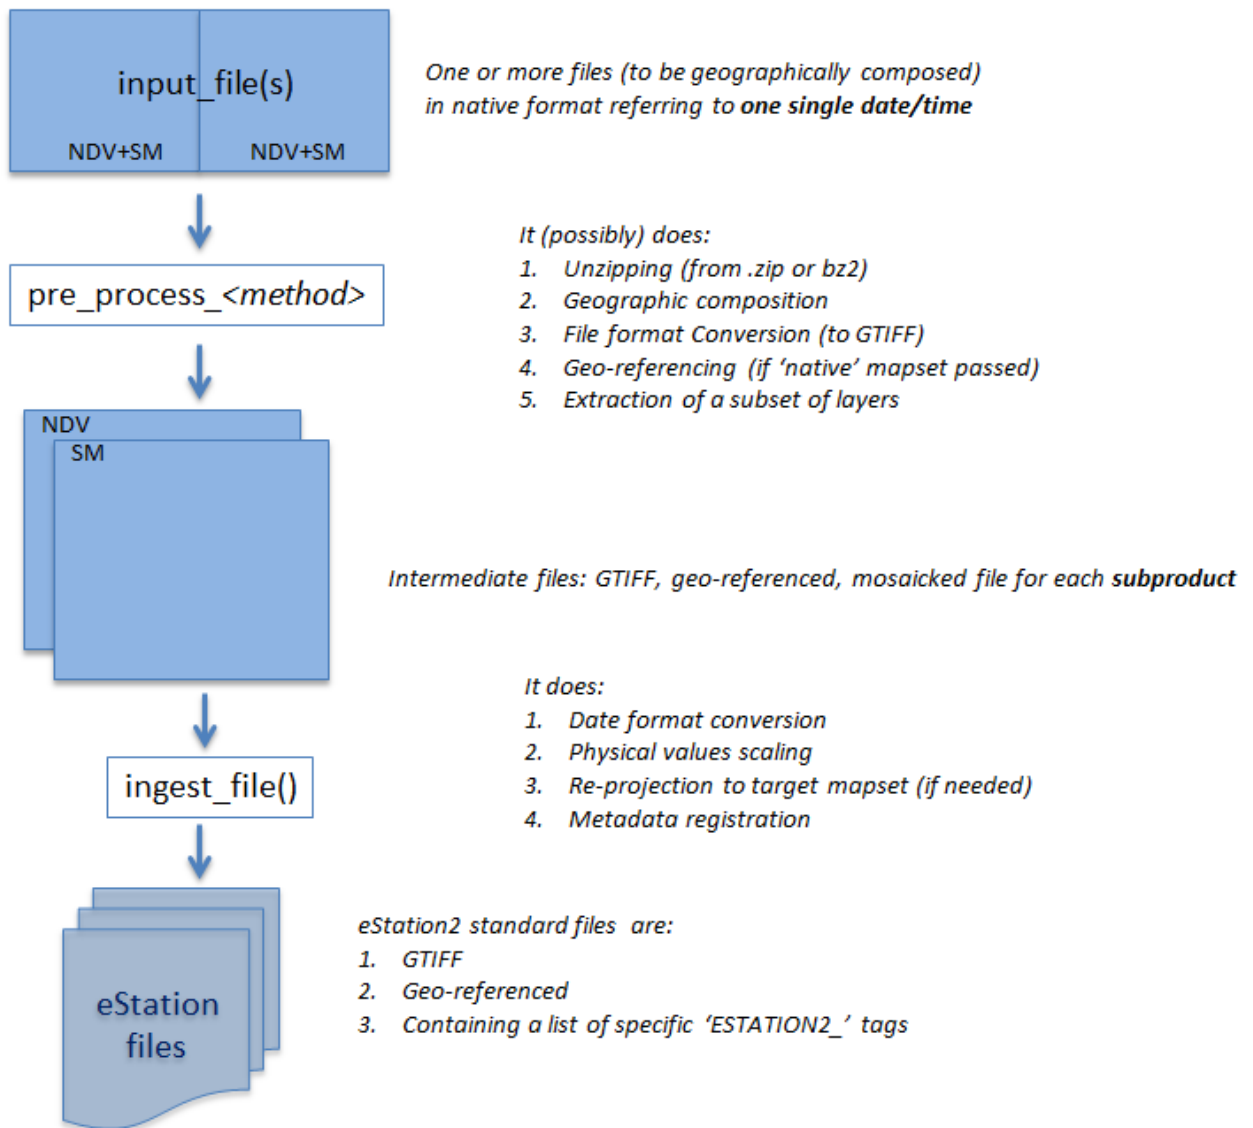


Figure 40: Ingestion data flow

Configuration

Several tables are involved in the configuration of the ingestion mechanism, and their relationship is represented in Figure 32, in a simplified manner. The tables used for the Get services are also involved because, as already specific, the format and naming of files containing the some product can vary according to the source.

The Product table is the pivot table for the Climate Station: therein all retrieved/processed and visualized products have to be defined. The Ingestion table establish the relationship between a *product/subproduct*¹⁹ and the mapset we will apply in the ingestion. The product_acquisition_data_source table associate a *product* and a source, which can be of 'EUMETCast' or 'Internet' type. This table has been already described in previous paragraphs, as well as the Datasource_Description (see 2.4.6), which mainly defines the rule adopted for the file naming. The Sub_Datasource_Description table contains the description of the contents of the input files (i.e. how many layers are present, what are the scale factor and offset,

¹⁹ Always identified by the *product/version/subproduct* triplet.

nodata coding). This table is directly linked to the Product table, to establish a relationship between the various layers in the files, and the associated *subproducts*.

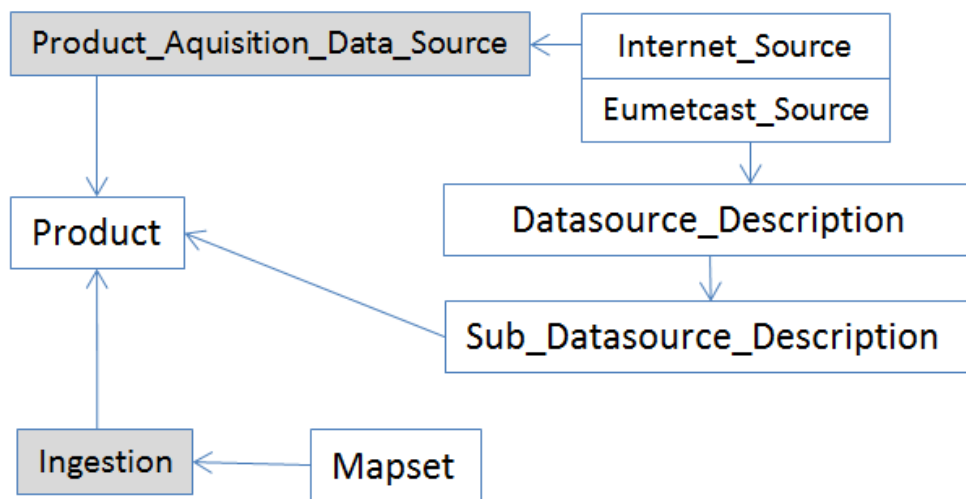


Figure 41: DB tables for ingestion

4.1.5 Processing Service

What it does

The ‘processing’ service is devoted to compute EO and Climate products and indicators from the ones already existing in the system, i.e. to implement some algorithms and put them in operations. These algorithms can include re-projection functionalities, computation of temporal composition (e.g. from 10d to 1 month precipitations), computation of long term statistics and anomalies, or more complicated operations. For the implementation of the service we base on the ‘ruffus’ python library²⁰, which is part of the Climate Station installation.

How it works

As a first step, the ‘processing’ chain to be implemented is defined by detailing the starting product (or products) and all computed products generated from them, which can represent either an intermediate result or a final indicator to be used.

In Figure 33 the processing chain for ‘standard precipitation’ products is displayed. The starting product is the 10-day Rainfall estimate (RFE) from which we compute the inter-annual statistics: min, max, average and median (step 1). From the product and these statistics several ‘anomalies’ are computed in Step 2 (10ddiff, 10dperc, 10dNPcum). Then, in step 3.a, we restart from the 10d product and we compute the cumulated precipitation over the month (1monCum); subsequently, statistics (step 3.b) and anomalies (step 3.c) are derived at the monthly level.

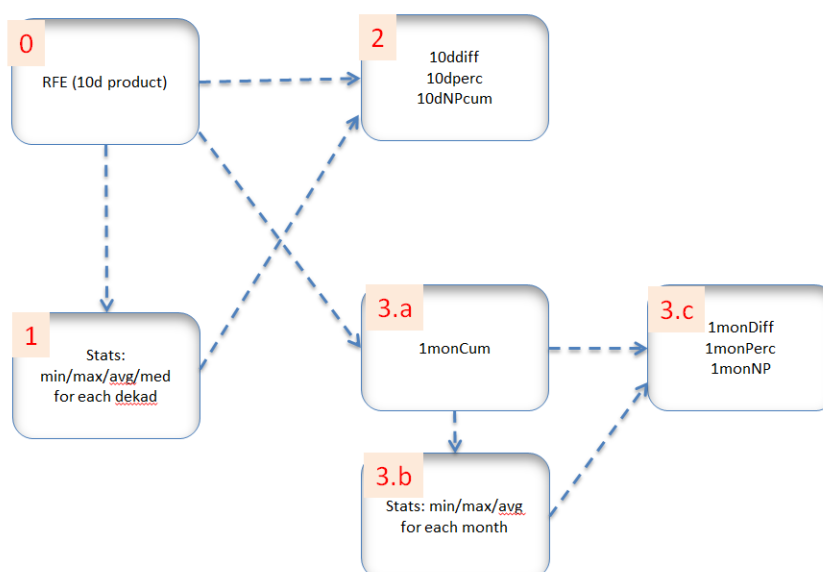


Figure 42: example of a processing chain

This processing chain is coded in python by following the ruffus approach, i.e. by creating a ‘pipeline’ that receives in input the 10d product, and defines all products depending on it. The added value of the ‘ruffus’ library is that, once all dependencies between input and output products are defined, the code is able to determine autonomously which outputs are missing with respect to the available inputs, and to trigger the computation of these images only.

²⁰ See <http://www.ruffus.org.uk/>

On the Climate Station release, a number of chains are defined, as described in Table 8; additional processing chains will be provided in the following releases.

Algorithm name	Options	Inputs	Outputs (by group)	Notes
std_precip	std_precip_prods_only std_precip_stats_only	A single precipitation product (e.g. 10d RFE)	10d stats 10d anomalies 1mon cumulate 1moncum stats 1moncum anomalies	The 'stats_only' option compute 10d-stats and 10dcum-stats only. The 'prods_only' option compute 10d-anomalies and 1moncum and 1moncum-anomalies only. The 'all' stats computes everything. This processing chain is displayed in Figure 33)
std_ndvi	std_ndvi_prods_only std_ndvi_stats_only	A single ndvi product (e.g. vgt-ndvi).	See	
merge_versions	-	Two or more products whose timeseries have to be joined (e.g. NDVI from SPOT-v1, SPOT-v2 and PROBA-V)	A single output (the merged timeseries from the inputs)	For each input product, the temporal window to be considered has to be provided.
proc_fronts	-	A Sea Surface Temperature (SST) product.	Sst-fronts	
proc_precip_1day		Daily rainfall product	10d, 1mon, 1year, 3mon, 6mon	
proc_opfish		Chlorophyll data	opfish	
proc_gradient		Chlorophyll data	gradient	

Table 7: List of available processing chains

The full processing chain of ndvi is graphically represented in Figure 34 and Figure 35. The starting point is a single 'NDV' product, and the following steps are defined:

1. Compute the statistics (1.a) and anomalies (1.b) from NDVI.
2. Apply a two-steps filtering procedure to filter the cloud contaminated pixels (2.a), and on the basis of the final result (ndvi_filterx2):
 - 2.b Computed statistics
 - 2.c Compute a 'baremask' product (to filter out the non-vegetated areas)
 - 2.d Compute the anomalies (e.g. ICN, VCI)
3. From the filtered NDVI, compute the monthly product (3.a), and from it:
 - 3.b Compute statistics
 - 3.c Compute the monthly 'baremask' product
 - 3.d Compute the monthly anomalies

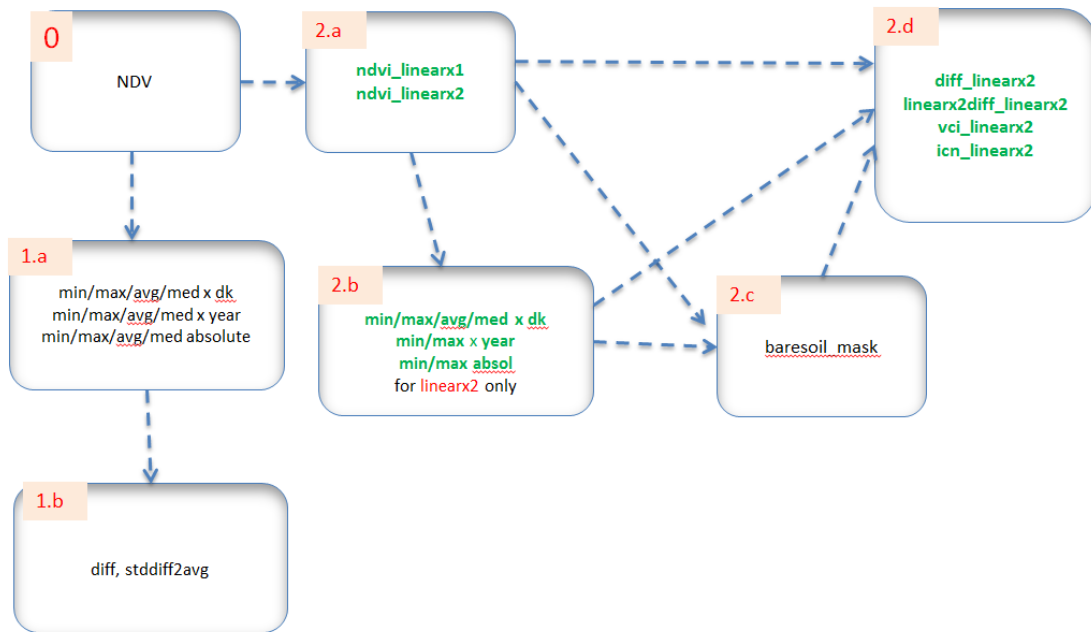


Figure 43: std_ndvi processing chain

The detailed description of this chain (the most complex implemented in the application) goes beyond the scope of this Manual, and is treated in the training sessions.

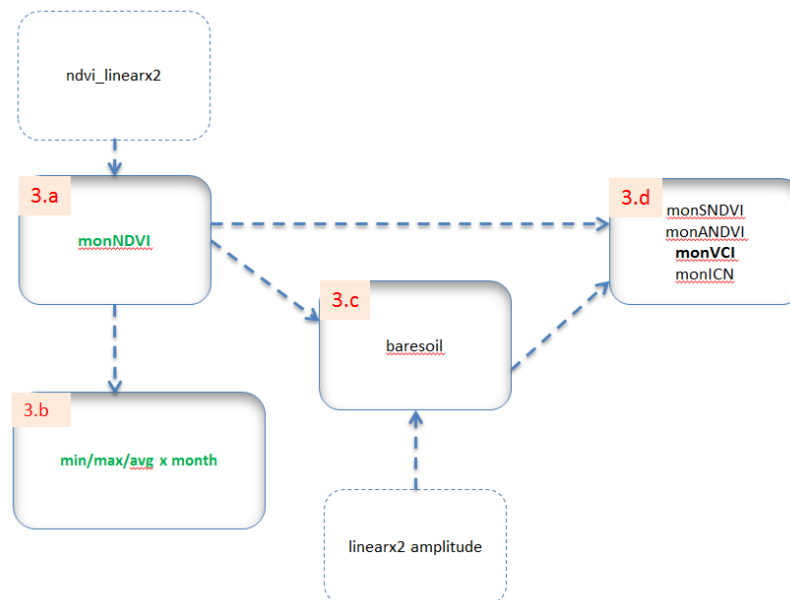


Figure 44: std_ndvi processing chain - 2

4.1.6 System Service

What it does

The System service is in charge of all ‘background’ operations that are not directly involved in the other Services, but essential for the good functioning of the machine, e.g. the synchronization of the data and database. In particular the service is in charge of the following operations:

1. Data synchronization
2. Database synchronization
3. Database dump
4. Cleaning temporary directories
5. Checking metadata information and check the corrupted files.

How it works

The System service works as a continuous loop and iterates over the above-described operations and, for each of them:

- Determines if the operation has to be executed.
- Determines if the ‘time’ requirements for the operations are met: some operations are executed at a given hour, or every number of hour or minutes.
- Executes the operation.

Configuration

The service is not based on database settings, rather on configuration files, namely the ‘System Settings’ and ‘Factory Settings’.).

The ‘System Settings’ file is parsed to determine the Role and Mode of the computer, which are defined at the installation (role) or modified in case of malfunctioning of one of the 2 computers.

The ‘Factory Settings’ that impact the System service are displayed in Table 9. On the 2.1 release they are not reported in the ‘System’ interface, and therefore not modifiable by the User.

Parameter name	Default value	Role
system_delay_data_sync_min	10	Delay time between executions of data sync
system_time_db_dump_hhmm	00:00	Time of the day for execution of the DB dump
system_time_spirits_conv	00:10	Time of the day for execution of the DB dump
system_sleep_time_sec	10	Delay time between execution of system loop

Table 8: Factory settings influencing System Service